

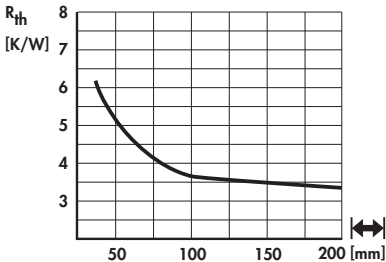



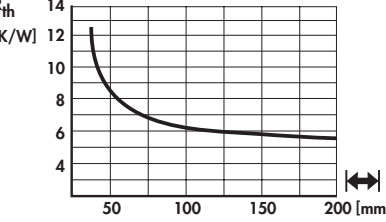



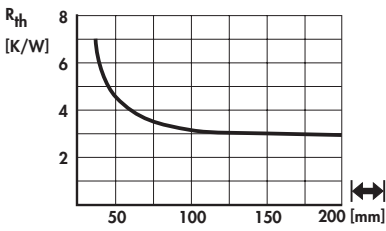



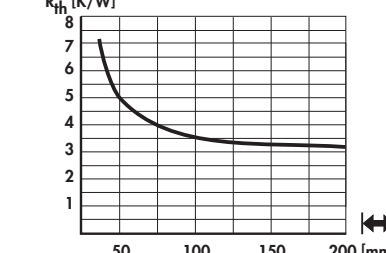



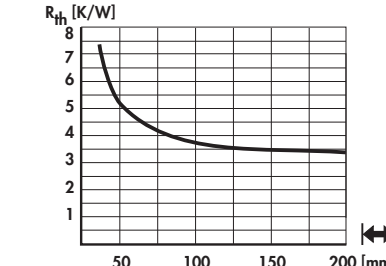



A

Extruded heatsinks for lock-in retaining spring

| | | | |
|---|---|---|---|
| art. no. SK 681 ... |  |  |  |
| please indicate: ...  25 37.5 50 75 84 100 1000 mm | | | |
| art. no. SK 492 ... |  |  |  |
| please indicate: ...  25 37.5 50 75 84 100 1000 mm | | | |
| art. no. SK 637 ... |  |  |  |
| please indicate: ...  25 37.5 50 75 84 100 1000 mm | | | |
| art. no. SK 573 ... |  |  |  |
| please indicate: ...  25 37.5 50 75 84 100 1000 mm | | | |
| art. no. SK 576 ... |  |  |  |
| please indicate: ...  25 37.5 50 75 84 100 1000 mm | | | |

please note: profile threads → A 5; screw-in solder pin ELS 3 → A 110

N