


Heatsink for PCB with threaded rail

- transistor mounting onto the heatsink using a slide-in rail with M3 thread
- easy positioning using a grid 6.35 mm
- other rail grids upon request
- suitable for TO 220, TO 218, TO 247 and similar
- thread channel for M3 screws
- screw-in solder pin M3 (**art. no.: ELS 3**)
- specific versions upon customer's request

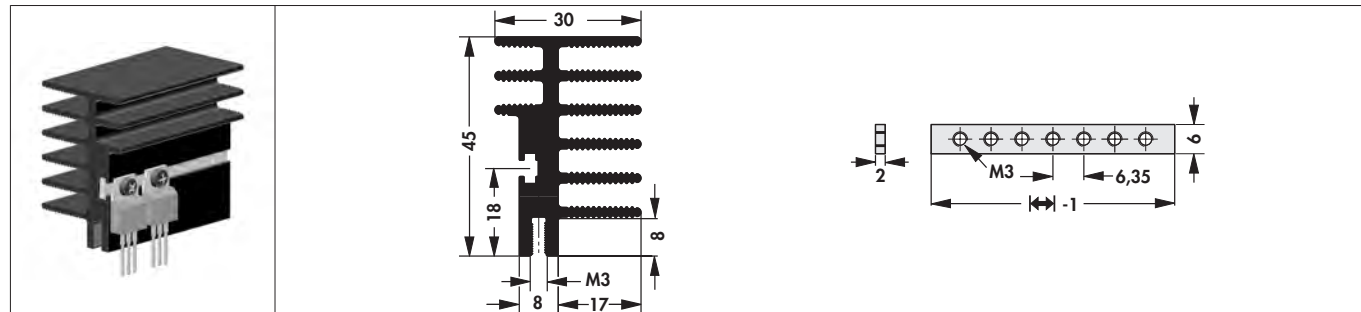

art. no.	↔ [mm]	R _{th} [K/W]	⌀	version
SK 518 50 GS	50	4.3	TO 220	with threaded rail
SK 518 75 GS	75	3.3		
SK 518 84 GS	84	3.0		
SK 518 50	50	4.3	—	without threaded rail
SK 518 75	75	3.3		
SK 518 84	84	3.0		
surface:		black anodised		

please note: profile threads → A 5



EL.ITALIA

www.elitaliaweb.it
info@elitaliaweb.it
+39 0233611626