

40W UI48/17 FAUI4817 SERIES



FEATURES

- Frequency 50/60Hz
- Potted under vacuum
- Split-bobbin
- Temperature class ta 40°C/B
- Weight: 0.445kg
- Packaging unit: 10 pieces [tray]
- Fixing material for 2.5mm [0.098 inch]
- Self-tapping screws: DIN 75 13 [M 3x8]
- Sheet-metal screws: DIN 7971 [2.9x6.5]


OPTIONS

- Bulk packaging is standard
- Custom design available

COMMON APPLICATIONS

- Medical equipments
- Industrial equipments
- Industrial controls
- Test equipments
- Industrial computers
- Avionics & telecom


PHYSICAL CHARACTERISTICS

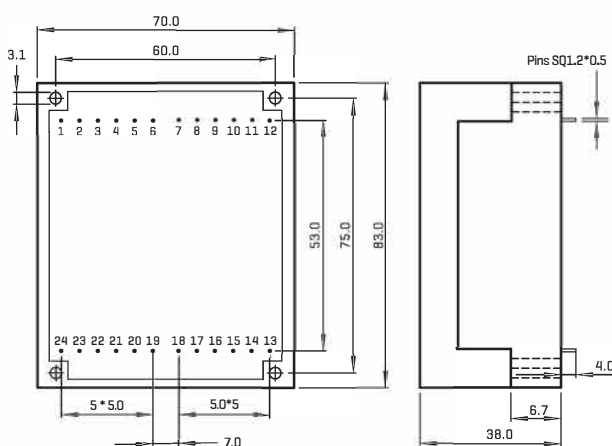

ELECTRICAL CHARACTERISTICS AT 25°C

Part Number	Primary [V]	Secondary [V/mA]	No-load voltage[V]	Fig.
FAUI 481767	2*6	2*3333	2*6.7	1
FAUI 481768	2*9	2*2222	2*10.0	1
FAUI 481769	2*12	2*1667	2*13.4	1
FAUI 481770	2*15	2*1333	2*16.7	1
FAUI 481771	2*18	2*1111	2*20.1	1
FAUI 481772	2*24	2*833	2*26.8	1

TECHNICAL INFORMATION

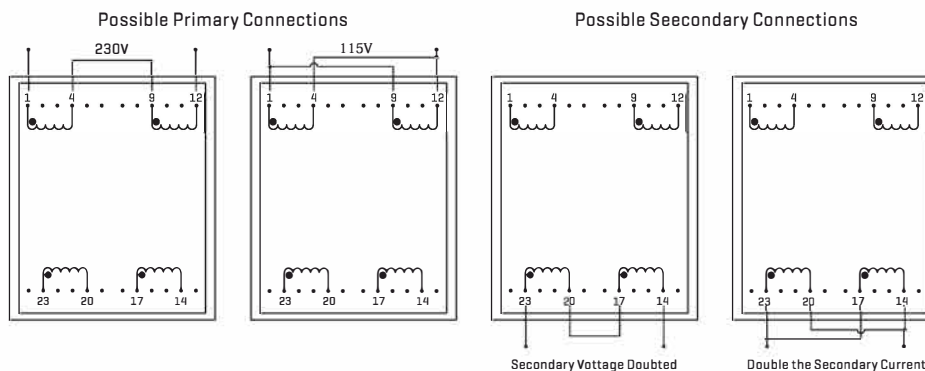

ALL DIMENSIONS IN MM

60W UI48/26 FAUI4826 SERIES



FEATURES

- Frequency 50/60Hz
- Potted under vacuum
- Split-bobbin
- Temperature class ta 40°C/B
- Weight: 0.53kg
- Packaging unit: 10 pieces [tray]
- Fixing material for 2.5mm [0.098 inch]
- Self-tapping screws: DIN 7513 [M 3x8]
- Sheet-metal screws: DIN 7971 [2.9x6.5]


OPTIONS

- Bulk packaging is standard
- Custom design available

COMMON APPLICATIONS

- Medical equipments
- Industrial equipments
- Industrial controls
- Test equipments
- Industrial computers
- Avionics & telecom


PHYSICAL CHARACTERISTICS

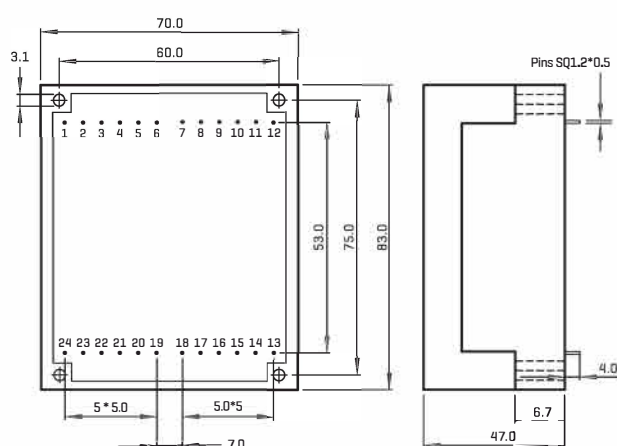

ELECTRICAL CHARACTERISTICS AT 25°C

Part Number	Primary [V]	Secondary [V/mA]	No-load voltage[V]	Fig.
FAUI 482673	2*6	2*5000	2*6.6	1
FAUI 482674	2*9	2*3333	2*9.9	1
FAUI 482675	2*12	2*2500	2*13.1	1
FAUI 482676	2*15	2*2000	2*16.4	1
FAUI 482677	2*18	2*1667	2*19.7	1
FAUI 482678	2*24	2*1250	2*26.3	1

TECHNICAL INFORMATION

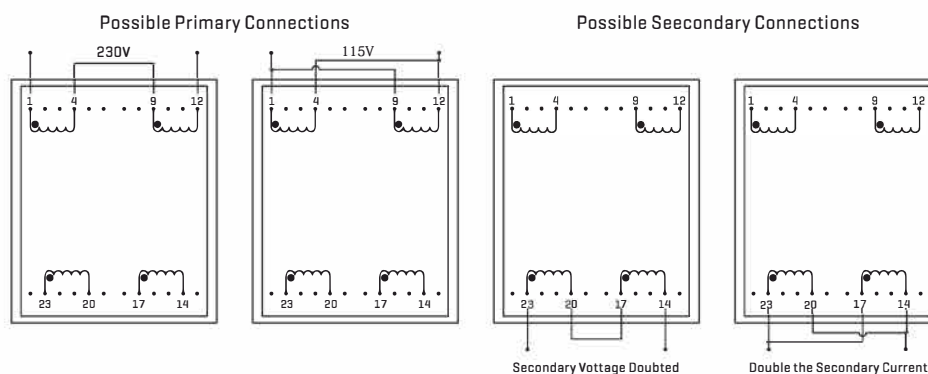

ALL DIMENSIONS IN MM