



■ ■ ■ SPT-G 1109 PIEZO SMD TRANSDUCER

FREQUENCY RESPONSE
[actual curve of type]





Model No	SPT-G1109
Rated Voltage	5Vp-p Square Wave
Max Allowable Voltage	25Vp-p Square Wave
Min Sound Pressure Level	72dB/5Vp-p Square Wave/4.1KHz/10cm
Capacitance at 100HZ	12 ± 30% nF
Resonant Frequency	4.1 ± 0.5KHz
Tone Nature	Continuous
Operating Temperature	-40 ~ +80°C
Storage Temperature	-50 ~ +85°C
Weight	0.5g

RoHS
Compliant



DIMENSIONS

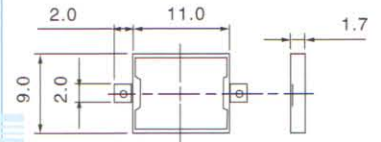

color Straw Yellow
LCP(94-V0) Housing Material
SMD Terminal

■ ■ ■ SPT-G 1210 PIEZO SMD TRANSDUCER

FREQUENCY RESPONSE
[actual curve of type]





Model No	SPT-G1210
Rated Voltage	3Vp-p Square Wave
Max Allowable Voltage	20Vp-p Square Wave
Min Sound Pressure Level	75dB/3Vp-p Square Wave/4.0KHz/10cm
Capacitance at 100HZ	16 ± 30% nF
Resonant Frequency	4.0 ± 0.5KHz
Tone Nature	Continuous
Operating Temperature	-20 ~ +70°C
Storage Temperature	-30 ~ +80°C
Weight	0.7g

RoHS
Compliant




DIMENSIONS



color Black
LCP Housing Material
SMD Terminal

■ ■ ■ SPT-G 1240 PIEZO SMD TRANSDUCER

FREQUENCY RESPONSE
[actual curve of type]





Model No	SPT-G1240
Rated Voltage	10Vp-p Square Wave
Max Allowable Voltage	30Vp-p Square Wave
Min Sound Pressure Level	70dB/10Vp-p Square Wave/4.0KHz/10cm
Capacitance at 100HZ	15 ± 30% nF
Resonant Frequency	4.0 ± 0.5KHz
Tone Nature	Continuous
Operating Temperature	-20 ~ 70°C
Storage Temperature	-30 ~ +80°C
Weight	0.6g

RoHS
Compliant



DIMENSIONS



color Black
PPS Housing Material
SMD Terminal

The information contained herein is believed to be correct, but no guarantee for accuracy, completeness, or KEPO Electronics Ltd reserves the right to make changes without notification.