


**KPT-G1711A3 PIEZO TRANSDUCER**

FREQUENCY RESPONSE  
[actual curve of type]




<b>Model No</b>	<b>KPT-G1711A3</b>
Rated Voltage	12Vp-p Square Wave
Max Allowable Voltage	30Vp-p Square Wave
Max Rated Current	2mA
Min.Sound Pressure Level	80dB/12Vp-p Square Wave/4.0KHz/10cm
Capacitance at 100HZ	14000 ± 30%PF
Resonant Frequency	4.0 ± 0.5KHz
Tone Nature	Continuous
Operating Temperature	-20~+80°C
Storage Temperature	-30~+100°C
Weight	2.0g

RoHS  
Compliant




color Black  
PA Housing Material  
Pin Terminal

**DIMENSIONS**

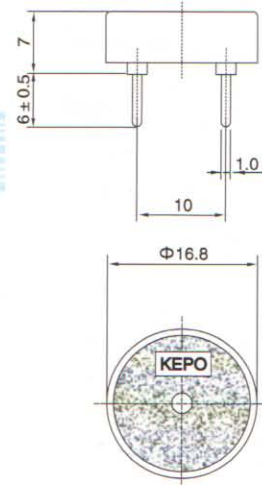

**KPT-G1712B PIEZO TRANSDUCER**

FREQUENCY RESPONSE  
[actual curve of type]




<b>Model No</b>	<b>KPT-G1712B</b>
Rated Voltage	3Vp-p Square Wave
Max Allowable Voltage	30Vp-p Square Wave
Max Rated Current	2mA
Min.Sound Pressure Level	70dB/3Vp-p Square Wave/2.0KHz/10cm
Capacitance at 100HZ	34000 ± 30%PF
Resonant Frequency	2.0 ± 0.5KHz
Tone Nature	Continuous
Operating Temperature	-20~+80°C
Storage Temperature	-30~+100°C
Weight	2.0g

RoHS  
Compliant




color Black  
PC Housing Material  
Pin Terminal

**DIMENSIONS**

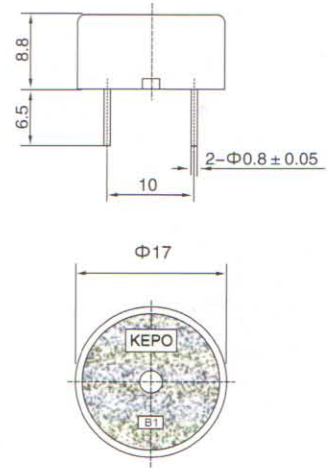

**KPT-G1720 PIEZO TRANSDUCER**

FREQUENCY RESPONSE  
[actual curve of type]




<b>Model No</b>	<b>KPT-G1720</b>
Rated Voltage	12Vp-p Square Wave
Max Allowable Voltage	30Vp-p Square Wave
Max Rated Current	3mA
Min.Sound Pressure Level	85dB/12Vp-p Square Wave/4.0KHz/10cm
Capacitance at 100HZ	14000 ± 30%PF
Resonant Frequency	4.0 ± 0.5KHz
Tone Nature	Continuous
Operating Temperature	-20~+80°C
Storage Temperature	-30~+100°C
Weight	2.0g

RoHS  
Compliant



color Black  
PC Housing Material  
Pin Terminal

**DIMENSIONS**

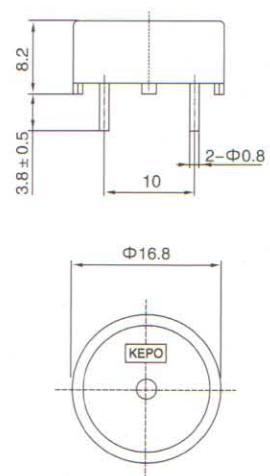

The information contained herein is believed to be correct but no guarantee for accuracy, completeness KEPO Electronics Ltd. reserves the right to make changes without notification.