




# UBC-59X Series Quick-Connect Terminal Block

## UBC-59X系列快速接线端子



### Technical requirement

1. The surface should be without significant defects, such as weld mark, shrinkage holes, mottle or scratches.
2. Wire ASize: 0.2-4mm<sup>2</sup>(24-12AWG)
3. Stripping lengAth:14mm
4. Rated Voltage/Current: IEC450V/32A  
Power Frequency Withstand Voltage: AC2500V, 1 minute  
Impulse Withstand Voltage: 4000V (1.2/50μs, plus & minus each 5 times)  
Insulation Resistance: DC500V ≥500MΩ
5. Working temperature: -40°C - +70°C
6. Positions: 2P, 3P and 5P

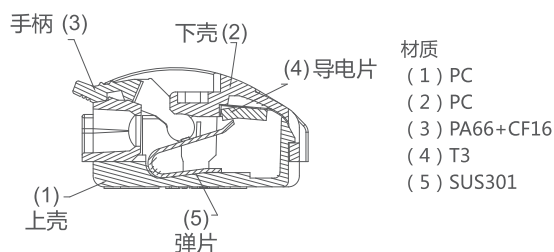

### DIMENTIONS

