




欧式接线端子台 EURO TERMINAL BLOCKS

欧式接线端子的脚距2.54mm、3.5mm、3.81mm、5.0mm、5.08mm、6.35mm、7.5mm、7.62mm、9.5mm、10.0mm、10.16mm，并含有90°，135°，180°，等三种进线方向，配合单层、双层和三层的設計，使应用的选择性多样化。产品设计符合IE60998、UL1059等国际标准并通过UL、VDE等认证。

Euro terminal blocks Available different pitches to be chose, there are 90°, 135°, 180° three type to insert lines, design with monolayer, double decks, and three decks, give more choices for convenient use. The products are designed in accordance with IEC60998C、UL1059 standards and we have got the approvals of UL, VDE, etc.

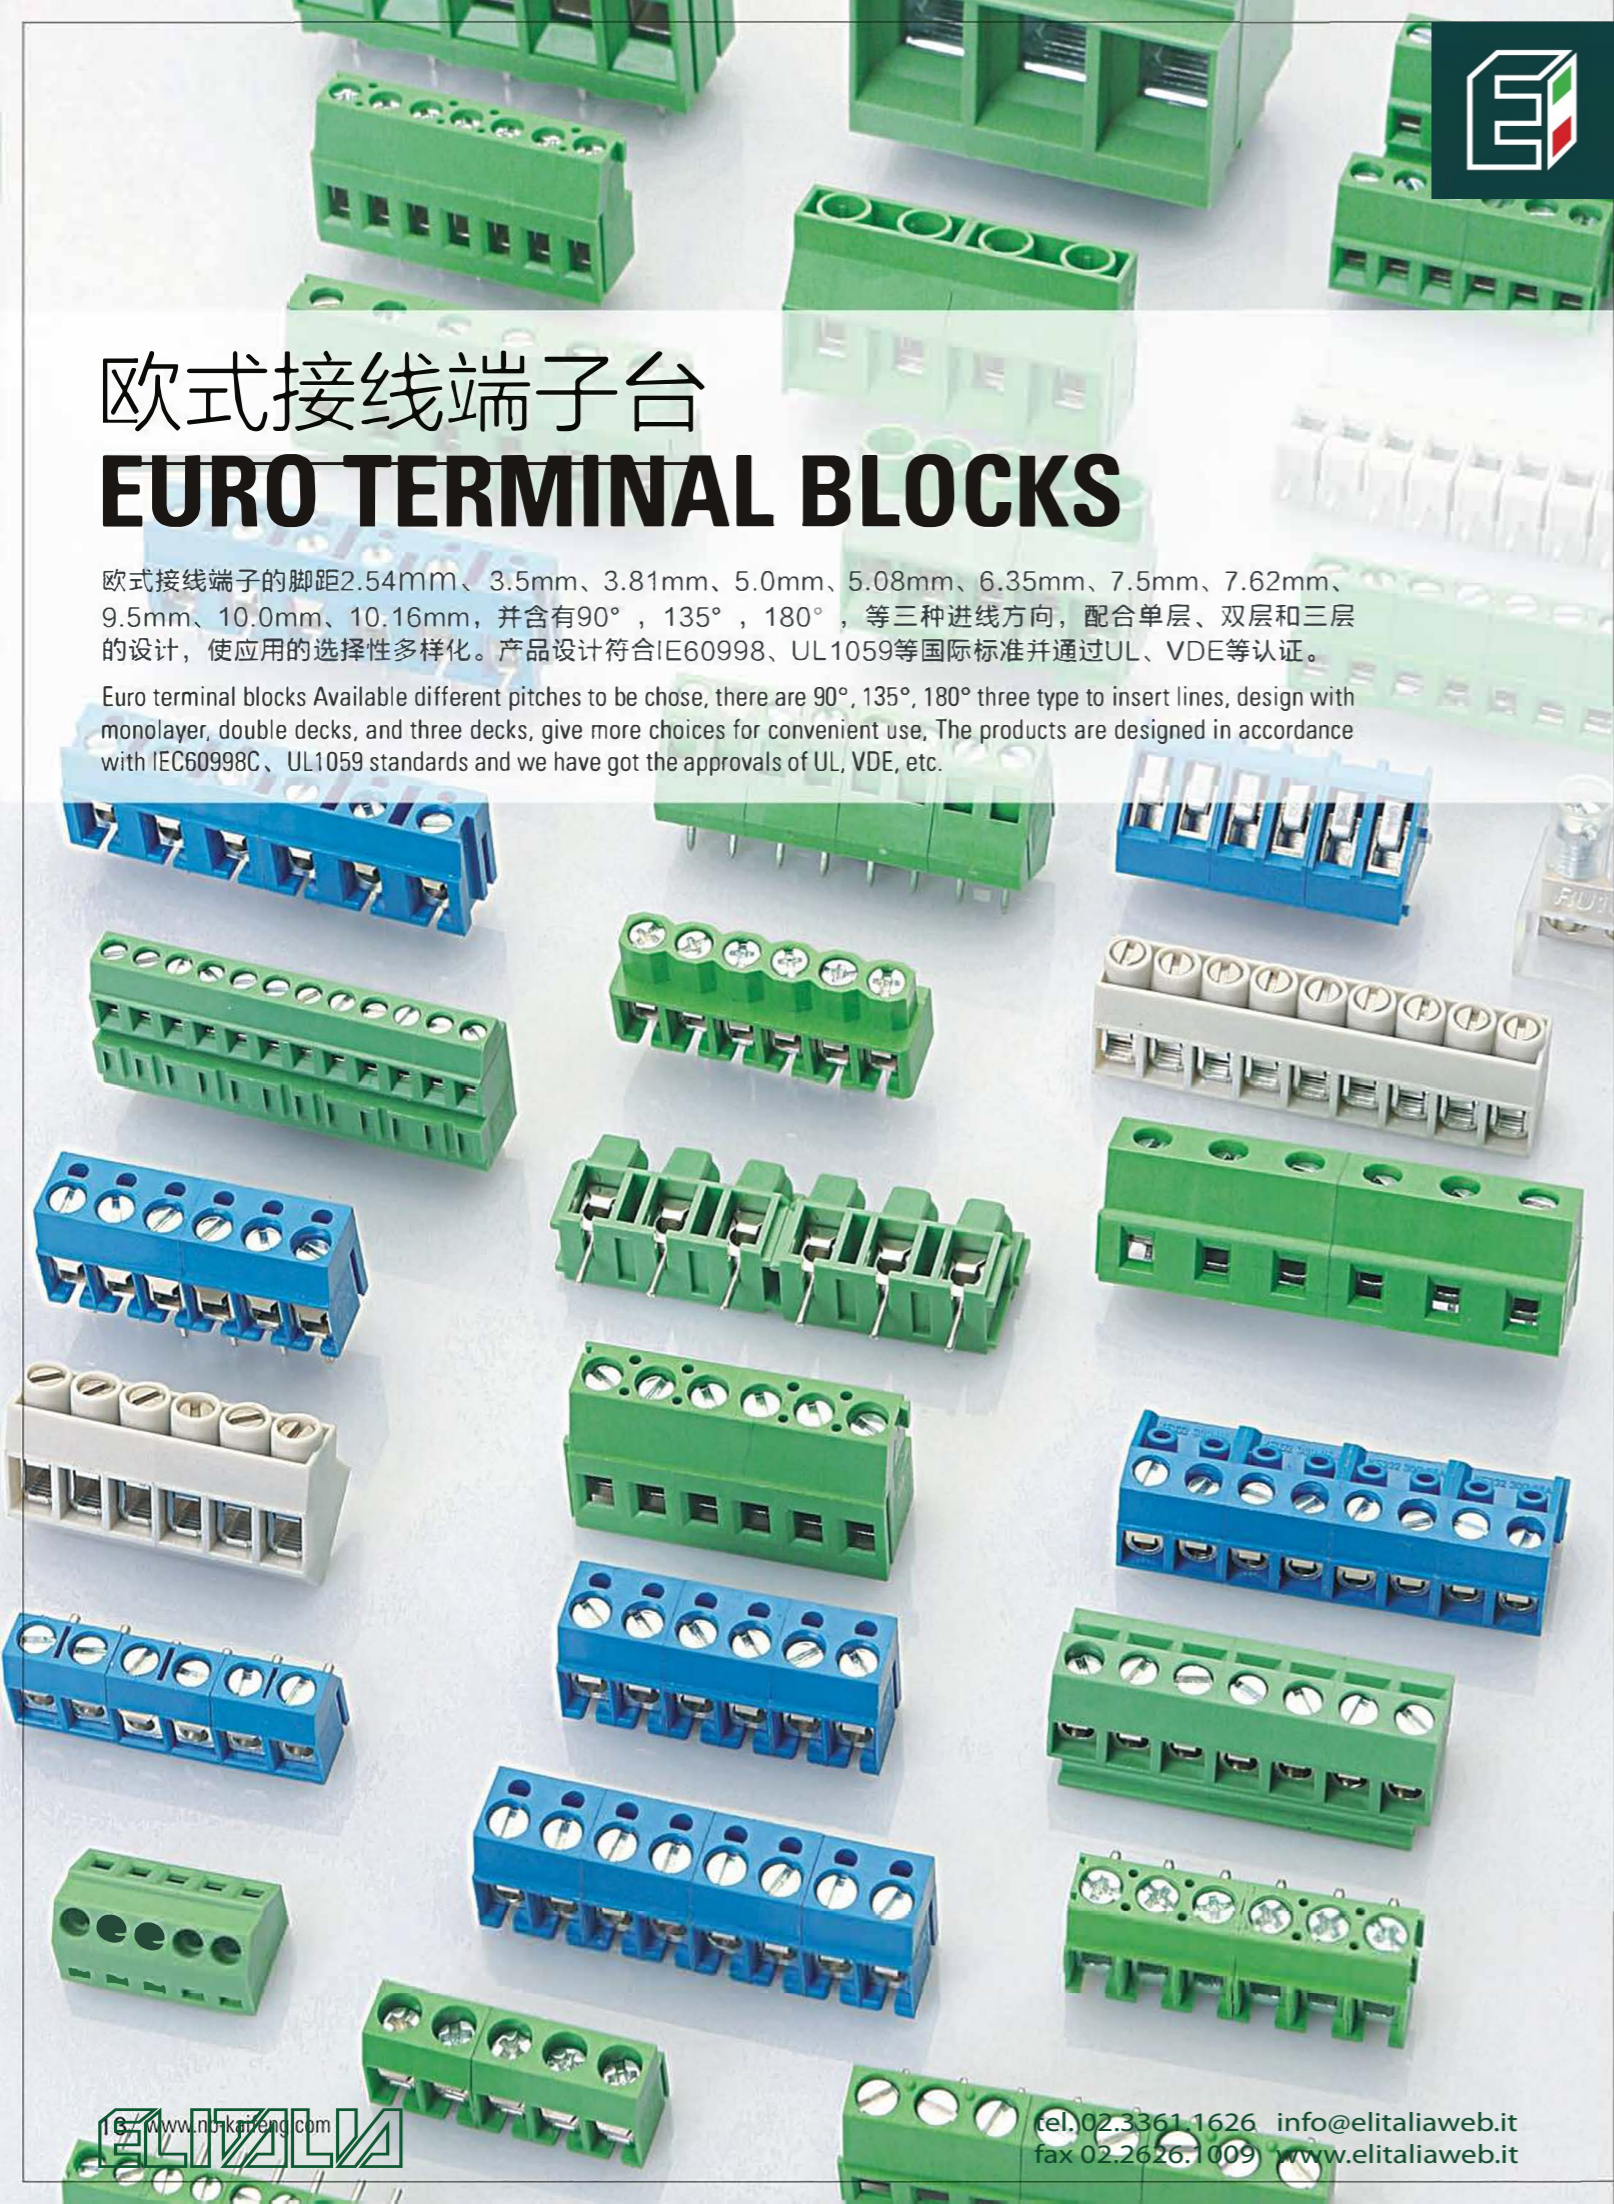

产品照片 PRODUCT PHOTO	 Pitch:5.00mm	 Pitch:5.00mm	 Pitch:5.00mm
产品图纸 PRODUCT PLAN			
产品型号 MODEL	KF300V	KF300R	KF305
材质&电镀 MATERIAL	M3.0, 钢, 镀锌 Steel, Zinc Plated 磷青铜镀镍或不锈钢 Phosphor bronze, Ni plated or stainless steel	M3.0, 钢, 镀锌 Steel, Zinc Plated 磷青铜镀镍或不锈钢 Phosphor bronze, Ni plated or stainless steel	M2.5, 钢, 镀锌 Steel, Zinc Plated 磷青铜镀镍或不锈钢 Phosphor bronze, Ni plated or stainless steel
电气性能 ELECTRICAL	UL IEC 额定电压 Rated voltage 300V 250V 额定电流 Rated current 12A 24A 接触电阻 Contact resistance 20mΩ 绝缘电阻 Insulation resistance 500MΩ/DC500V 耐电压 Withstanding voltage AC2000V/1min 使用线径 Wire range 22-14AWG 2.5mm ²	UL IEC 额定电压 Rated voltage 300V 250V 额定电流 Rated current 12A 24A 接触电阻 Contact resistance 20mΩ 绝缘电阻 Insulation resistance 500MΩ/DC500V 耐电压 Withstanding voltage AC2000V/1min 使用线径 Wire range 22-14AWG 2.5mm ²	UL IEC 额定电压 Rated voltage 300V 250V 额定电流 Rated current 12A 24A 接触电阻 Contact resistance 20mΩ 绝缘电阻 Insulation resistance 500MΩ/DC500V 耐电压 Withstanding voltage AC2000V/1min 使用线径 Wire range 22-14AWG 2.5mm ²
机械性能 MECHANICAL	温度范围 Temp. range -30°C--+120°C 瞬时温度 Max. soldering +250°C, 5sec 扭矩 Torque 0.5N.m 4.4Lb.in 剥线长度 Strip length 4.5-5mm	温度范围 Temp. range -30°C--+120°C 瞬时温度 Max. soldering +250°C, 5sec 扭矩 Torque 0.5N.m 4.4Lb.in 剥线长度 Strip length 4.5-5mm	温度范围 Temp. range -30°C--+120°C 瞬时温度 Max. soldering +250°C, 5sec 扭矩 Torque 0.4N.m 3.5Lb.in 剥线长度 Strip length 4.5-5mm
产品照片 PRODUCT PHOTO	 Pitch:7.50mm	 Pitch:7.50mm	 Pitch:5.00mm
产品图纸 PRODUCT PLAN			
产品型号 MODEL	KF705A	KF705	KF330
材质&电镀 MATERIAL	M2.5, 钢, 镀锌 Steel, Zinc Plated 磷青铜镀镍或不锈钢 Phosphor bronze, Ni plated or stainless steel	M3.0, 钢, 镀锌 Steel, Zinc Plated 磷青铜镀镍或不锈钢 Phosphor bronze, Ni plated or stainless steel	M2.5, 钢, 镀锌 Steel, Zinc Plated 磷青铜镀镍或不锈钢 Phosphor bronze, Ni plated or stainless steel
电气性能 ELECTRICAL	UL IEC 额定电压 Rated voltage 300V 450V 额定电流 Rated current 12A 24A 接触电阻 Contact resistance 20mΩ 绝缘电阻 Insulation resistance 500MΩ/DC500V 耐电压 Withstanding voltage AC2500V/1min 使用线径 Wire range 22-14AWG 2.5mm ²	UL IEC 额定电压 Rated voltage 300V 450V 额定电流 Rated current 12A 24A 接触电阻 Contact resistance 20mΩ 绝缘电阻 Insulation resistance 500MΩ/DC500V 耐电压 Withstanding voltage AC2500V/1min 使用线径 Wire range 22-14AWG 2.5mm ²	UL IEC 额定电压 Rated voltage 300V 250V 额定电流 Rated current 15A 24A 接触电阻 Contact resistance 20mΩ 绝缘电阻 Insulation resistance 500MΩ/DC500V 耐电压 Withstanding voltage AC2000V/1min 使用线径 Wire range 22-14AWG 2.5mm ²
机械性能 MECHANICAL	温度范围 Temp. range -30°C--+120°C 瞬时温度 Max. soldering +250°C, 5sec 扭矩 Torque 0.4N.m 3.5Lb.in 剥线长度 Strip length 4.5-5mm	温度范围 Temp. range -30°C--+120°C 瞬时温度 Max. soldering +250°C, 5sec 扭矩 Torque 0.5N.m 4.4Lb.in 剥线长度 Strip length 4.5-5mm	温度范围 Temp. range -40°C--+105°C 瞬时温度 Max. soldering +250°C, 5sec 扭矩 Torque 0.4N.m 3.5Lb.in 剥线长度 Strip length 4.5-5mm



产品照片 PRODUCT PHOTO			
	Pitch:5.00mm	Pitch:5.00mm	Pitch:5.00mm
产品图纸 PRODUCT PLAN			
产品型号 MODEL	KF301R	KF301V	KF302
材质&电镀 MATERIAL	M2.5, 钢, 镀锌 Steel, Zinc Plated 磷青铜镀镍或不锈钢 Phosphor bronze, Ni plated or stainless steel 簧片 磷青铜, 镀锡 Phosphor bronze, Tin plated 焊针 黄铜, 镀锡 Brass, Tin plated 塑件 PA66, UL94V-0	M2.5, 钢, 镀锌 Steel, Zinc Plated 磷青铜镀镍或不锈钢 Phosphor bronze, Ni plated or stainless steel 簧片 磷青铜, 镀锡 Phosphor bronze, Tin plated 焊针 黄铜, 镀锡 Brass, Tin plated 塑件 PA66, UL94V-0	M2.5, 钢, 镀锌 Steel, Zinc Plated 磷青铜镀镍或不锈钢 Phosphor bronze, Ni plated or stainless steel 簧片 磷青铜, 镀锡 Phosphor bronze, Tin plated 焊针 黄铜, 镀锡 Brass, Tin plated 塑件 PA66, UL94V-0
电气性能 ELECTRICAL	UL IEC 额定电压 Rated voltage 300V 250V 额定电流 Rated current 12A 17.5A 接触电阻 Contact resistance 20mΩ 绝缘电阻 Insulation resistance 500MΩ/DC500V 耐压 Withstanding voltage AC2000V/1min 使用线径 Wire range 22-14AWG 2.5mm ²	UL IEC 额定电压 Rated voltage 300V 250V 额定电流 Rated current 12A 17.5A 接触电阻 Contact resistance 20mΩ 绝缘电阻 Insulation resistance 500MΩ/DC500V 耐压 Withstanding voltage AC2000V/1min 使用线径 Wire range 22-14AWG 2.5mm ²	UL IEC 额定电压 Rated voltage 300V 250V 额定电流 Rated current 12A 17.5A 接触电阻 Contact resistance 20mΩ 绝缘电阻 Insulation resistance 500MΩ/DC500V 耐压 Withstanding voltage AC2000V/1min 使用线径 Wire range 22-14AWG 2.5mm ²
机械性能 MECHANICAL	温度范围 Temp. range -30°C~+120°C 瞬时温度 Max. soldering +250°C, 5sec 扭矩 Torque 0.4N.m 3.5Lb.in 剥线长度 Strip length 4.5-5mm	温度范围 Temp. range -30°C~+120°C 瞬时温度 Max. soldering +250°C, 5sec 扭矩 Torque 0.4N.m 3.5Lb.in 剥线长度 Strip length 4.5-5mm	温度范围 Temp. range -30°C~+120°C 瞬时温度 Max. soldering +250°C, 5sec 扭矩 Torque 0.4N.m 3.5Lb.in 剥线长度 Strip length 4.5-5mm

产品照片 PRODUCT PHOTO			
	Pitch:5.00mm	Pitch:5.00mm	Pitch:5.00mm
产品图纸 PRODUCT PLAN			
产品型号 MODEL	KF332-A	KF332-B	KF332
材质&电镀 MATERIAL	M3.0, 钢, 镀锌 Steel, Zinc Plated 磷青铜, 镀镍 Phosphor bronze, Ni plated 簧片 磷青铜, 镀锡 Phosphor bronze, Tin plated 焊针 黄铜, 镀锡 Brass, Tin plated 塑件 PA66, UL94V-0	M3.0, 钢, 镀锌 Steel, Zinc Plated 磷青铜, 镀镍 Phosphor bronze, Ni plated 簧片 磷青铜, 镀锡 Phosphor bronze, Tin plated 焊针 黄铜, 镀锡 Brass, Tin plated 塑件 PA66, UL94V-0	M2.5, 钢, 镀锌 Steel, Zinc Plated 磷青铜, 镀镍 Phosphor bronze, Ni plated 簧片 磷青铜, 镀锡 Phosphor bronze, Tin plated 焊针 黄铜, 镀锡 Brass, Tin plated 塑件 PA66, UL94V-0
电气性能 ELECTRICAL	UL IEC 额定电压 Rated voltage 300V 250V 额定电流 Rated current 10A 24A 接触电阻 Contact resistance 20mΩ 绝缘电阻 Insulation resistance 500MΩ/DC500V 耐压 Withstanding voltage AC2000V/1min 使用线径 Wire range 28-16AWG 2.5mm ²	UL IEC 额定电压 Rated voltage 300V 250V 额定电流 Rated current 10A 24A 接触电阻 Contact resistance 20mΩ 绝缘电阻 Insulation resistance 500MΩ/DC500V 耐压 Withstanding voltage AC2000V/1min 使用线径 Wire range 28-16AWG 2.5mm ²	UL IEC 额定电压 Rated voltage 300V 250V 额定电流 Rated current 10A 12A 接触电阻 Contact resistance 20mΩ 绝缘电阻 Insulation resistance 500MΩ/DC500V 耐压 Withstanding voltage AC2000V/1min 使用线径 Wire range 28-16AWG 1.5mm ²
机械性能 MECHANICAL	温度范围 Temp. range -40°C~+105°C 瞬时温度 Max. soldering +250°C, 5sec 扭矩 Torque 0.5N.m 4.43Lb.in 剥线长度 Strip length 5-6mm	温度范围 Temp. range -40°C~+105°C 瞬时温度 Max. soldering +250°C, 5sec 扭矩 Torque 0.5N.m 4.43Lb.in 剥线长度 Strip length 5-6mm	温度范围 Temp. range -40°C~+105°C 瞬时温度 Max. soldering +250°C, 5sec 扭矩 Torque 0.4N.m 3.5Lb.in 剥线长度 Strip length 5-6mm

产品照片 PRODUCT PHOTO			
	Pitch:5.00mm	Pitch:5.00mm	Pitch:7.50mm
产品图纸 PRODUCT PLAN			
产品型号 MODEL	KF306V	KF306R	KF360
材质&电镀 MATERIAL	M3.0, 钢, 镀锌 Steel, Zinc Plated 磷青铜镀镍或不锈钢 Phosphor bronze, Ni plated or stainless steel 簧片 磷青铜, 镀锡 Phosphor bronze, Tin plated 焊针 黄铜, 镀锡 Brass, Tin plated 塑件 PA66, UL94V-0	M3.0, 钢, 镀锌 Steel, Zinc Plated 磷青铜镀镍或不锈钢 Phosphor bronze, Ni plated or stainless steel 簧片 磷青铜, 镀锡 Phosphor bronze, Tin plated 焊针 黄铜, 镀锡 Brass, Tin plated 塑件 PA66, UL94V-0	M3.0, 钢, 镀锌 Steel, Zinc Plated 磷青铜镀镍或不锈钢 Phosphor bronze, Ni plated or stainless steel 簧片 磷青铜, 镀锡 Phosphor bronze, Tin plated 焊针 黄铜, 镀锡 Brass, Tin plated 塑件 PA66, UL94V-0
电气性能 ELECTRICAL	UL IEC 额定电压 Rated voltage 300V 250V 额定电流 Rated current 12A 25A 接触电阻 Contact resistance 20mΩ 绝缘电阻 Insulation resistance 500MΩ/DC500V 耐压 Withstanding voltage AC2000V/1min 使用线径 Wire range 22-14AWG 2.5mm ²	UL IEC 额定电压 Rated voltage 300V 250V 额定电流 Rated current 12A 25A 接触电阻 Contact resistance 20mΩ 绝缘电阻 Insulation resistance 500MΩ/DC500V 耐压 Withstanding voltage AC2000V/1min 使用线径 Wire range 22-14AWG 2.5mm ²	UL IEC 额定电压 Rated voltage 300V 450V 额定电流 Rated current 15A 24A 接触电阻 Contact resistance 20mΩ 绝缘电阻 Insulation resistance 500MΩ/DC500V 耐压 Withstanding voltage AC2500V/1min 使用线径 Wire range 24-14AWG 2.5mm ²
机械性能 MECHANICAL	温度范围 Temp. range -40°C~+105°C 瞬时温度 Max. soldering +250°C, 5sec 扭矩 Torque 0.5N.m 4.4Lb.in 剥线长度 Strip length 4.5-5mm	温度范围 Temp. range -40°C~+105°C 瞬时温度 Max. soldering +250°C, 5sec 扭矩 Torque 0.5N.m 4.4Lb.in 剥线长度 Strip length 4.5-5mm	温度范围 Temp. range -30°C~+105°C 瞬时温度 Max. soldering +250°C, 5sec 扭矩 Torque 0.5N.m 4.4Lb.in 剥线长度 Strip length 4.5-5mm

产品照片 PRODUCT PHOTO			
	Pitch:5.00mm	Pitch:5.00mm	Pitch:3.50mm
产品图纸 PRODUCT PLAN			
产品型号 MODEL	KF332N	KF332N1	KF350V
材质&电镀 MATERIAL	M3.0, 钢, 镀锌 Steel, Zinc Plated 磷青铜, 镀镍 Phosphor bronze, Ni plated 簧片 磷青铜, 镀锡 Phosphor bronze, Tin plated 焊针 黄铜, 镀锡 Brass, Tin plated 塑件 PA66, UL94V-0	M3.0, 钢, 镀锌 Steel, Zinc Plated 磷青铜, 镀镍 Phosphor bronze, Ni plated 簧片 磷青铜, 镀锡 Phosphor bronze, Tin plated 焊针 黄铜, 镀锡 Brass, Tin plated 塑件 PA66, UL94V-0	M2.0, 钢, 镀锌 Steel, Zinc Plated 磷青铜镀镍或不锈钢 Phosphor bronze, Ni plated or stainless steel 簧片 磷青铜, 镀锡 Phosphor bronze, Tin plated 焊针 黄铜, 镀锡 Brass, Tin plated 塑件 PA66, UL94V-0
电气性能 ELECTRICAL	UL IEC 额定电压 Rated voltage 300V 250V 额定电流 Rated current 10A 12A 接触电阻 Contact resistance 20mΩ 绝缘电阻 Insulation resistance 500MΩ/DC500V 耐压 Withstanding voltage AC2000V/1min 使用线径 Wire range -	UL IEC 额定电压 Rated voltage 300V 250V 额定电流 Rated current 10A 12A 接触电阻 Contact resistance 20mΩ 绝缘电阻 Insulation resistance 500MΩ/DC500V 耐压 Withstanding voltage AC2000V/1min 使用线径 Wire range -	UL IEC 额定电压 Rated voltage 300V 130V 额定电流 Rated current 7A 10A 接触电阻 Contact resistance 20mΩ 绝缘电阻 Insulation resistance 500MΩ/DC500V 耐压 Withstanding voltage AC1250V/1min 使用线径 Wire range 24-18AWG 1.0mm ²
机械性能 MECHANICAL	温度范围 Temp. range -40°C~+105°C 瞬时温度 Max. soldering +250°C, 5sec 扭矩 Torque - 剥线长度 Strip length -	温度范围 Temp. range -40°C~+105°C 瞬时温度 Max. soldering +250°C, 5sec 扭矩 Torque - 剥线长度 Strip length -	温度范围 Temp. range -40°C~+105°C 瞬时温度 Max. soldering +250°C, 5sec 扭矩 Torque 0.2N.m 1.7Lb.in 剥线长度 Strip length 5-6mm



产品照片 PRODUCT PHOTO			
	Pitch:3.50mm	Pitch:3.96mm	Pitch:3.96mm
产品图纸 PRODUCT PLAN			
	N=Number of contacts	N=Number of contacts	N=Number of contacts
产品型号 MODEL	KF350R	KF396V	KF396R
材质&电镀 MATERIAL	M2.0, 钢, 镀锌 Steel, Zinc Plated 磷青铜镀镍或不锈钢 Phosphor bronze, Ni plated or stainless steel 黄铜, 镀锡 Brass, Tin plated PA66, UL94V-0	M2.0, 钢, 镀锌 Steel, Zinc Plated 磷青铜镀镍或不锈钢 Phosphor bronze, Ni plated or stainless steel 黄铜, 镀锡 Brass, Tin plated PA66, UL94V-0	M2.0, 钢, 镀锌 Steel, Zinc Plated 磷青铜镀镍或不锈钢 Phosphor bronze, Ni plated or stainless steel 黄铜, 镀锡 Brass, Tin plated PA66, UL94V-0
电气性能 ELECTRICAL	UL IEC 额定电压 Rated voltage 300V 130V 额定电流 Rated current 7A 10A 接触电阻 Contact resistance 20mΩ 绝缘电阻 Insulation resistance 500MΩ/DC500V 耐压 Withstanding voltage AC1250V/1min 使用线径 Wire range 24-18AWG 1.0mm ²	UL IEC 额定电压 Rated voltage 300V 130V 额定电流 Rated current 7A 10A 接触电阻 Contact resistance 20mΩ 绝缘电阻 Insulation resistance 500MΩ/DC500V 耐压 Withstanding voltage AC1250V/1min 使用线径 Wire range 24-18AWG 1.0mm ²	UL IEC 额定电压 Rated voltage 300V 130V 额定电流 Rated current 7A 10A 接触电阻 Contact resistance 20mΩ 绝缘电阻 Insulation resistance 500MΩ/DC500V 耐压 Withstanding voltage AC1250V/1min 使用线径 Wire range 24-18AWG 1.0mm ²
机械性能 MECHANICAL	温度范围 Temp. range -40°C~+105°C 瞬时温度 Max. soldering +250°C, 5sec 扭矩 Torque 0.2N.m 1.7Lb.in 剥线长度 Strip length 5-6mm	温度范围 Temp. range -40°C~+105°C 瞬时温度 Max. soldering +250°C, 5sec 扭矩 Torque 0.2N.m 1.7Lb.in 剥线长度 Strip length 5-6mm	温度范围 Temp. range -40°C~+105°C 瞬时温度 Max. soldering +250°C, 5sec 扭矩 Torque 0.2N.m 1.7Lb.in 剥线长度 Strip length 5-6mm

产品照片 PRODUCT PHOTO			
	Pitch:5.00mm	Pitch:5.00mm	Pitch:5.00mm
产品图纸 PRODUCT PLAN			
	N=Number of contacts	N=Number of contacts	N=Number of contacts
产品型号 MODEL	KF125V	KF126V	KF126R
材质&电镀 MATERIAL	M2.0, 钢, 镀锌 Steel, Zinc Plated 磷青铜镀镍或不锈钢 Phosphor bronze, Ni plated or stainless steel 黄铜, 镀锡 Brass, Tin plated PA66, UL94V-0	M2.5, 钢, 镀锌 Steel, Zinc Plated 磷青铜镀镍或不锈钢 Phosphor bronze, Ni plated or stainless steel 黄铜, 镀锡 Brass, Tin plated PA66, UL94V-0	M2.5, 钢, 镀锌 Steel, Zinc Plated 磷青铜镀镍或不锈钢 Phosphor bronze, Ni plated or stainless steel 黄铜, 镀锡 Brass, Tin plated PA66, UL94V-0
电气性能 ELECTRICAL	UL IEC 额定电压 Rated voltage 300V 250V 额定电流 Rated current 10A 12A 接触电阻 Contact resistance 20mΩ 绝缘电阻 Insulation resistance 500MΩ/DC500V 耐压 Withstanding voltage AC1500V/1min 使用线径 Wire range 22-16AWG 1.5mm ²	UL IEC 额定电压 Rated voltage 300V 250V 额定电流 Rated current 10A 18A 接触电阻 Contact resistance 20mΩ 绝缘电阻 Insulation resistance 500MΩ/DC500V 耐压 Withstanding voltage AC2000V/1min 使用线径 Wire range 20-14AWG 2.5mm ²	UL IEC 额定电压 Rated voltage 300V 250V 额定电流 Rated current 10A 18A 接触电阻 Contact resistance 20mΩ 绝缘电阻 Insulation resistance 500MΩ/DC500V 耐压 Withstanding voltage AC2000V/1min 使用线径 Wire range 20-14AWG 2.5mm ²
机械性能 MECHANICAL	温度范围 Temp. range -40°C~+105°C 瞬时温度 Max. soldering +250°C, 5sec 扭矩 Torque 0.2N.m 1.7Lb.in 剥线长度 Strip length 4.5-5mm	温度范围 Temp. range -40°C~+105°C 瞬时温度 Max. soldering +250°C, 5sec 扭矩 Torque 0.4N.m 3.5Lb.in 剥线长度 Strip length 6-7mm	温度范围 Temp. range -40°C~+105°C 瞬时温度 Max. soldering +250°C, 5sec 扭矩 Torque 0.4N.m 3.5Lb.in 剥线长度 Strip length 6-7mm

产品照片 PRODUCT PHOTO			
	Pitch:5.00mm	Pitch:5.00mm	Pitch:5.00mm
产品图纸 PRODUCT PLAN			
	N=Number of contacts	N=Number of contacts	N=Number of contacts
产品型号 MODEL	KF166	KF167V	KF167R
材质&电镀 MATERIAL	M2.5, 钢, 镀锌 Steel, Zinc Plated 磷青铜镀镍或不锈钢 Phosphor bronze, Ni plated or stainless steel 黄铜, 镀锡 Brass, Tin plated PA66, UL94V-0	M2.5, 钢, 镀锌 Steel, Zinc Plated 磷青铜镀镍或不锈钢 Phosphor bronze, Ni plated or stainless steel 黄铜, 镀锡 Brass, Tin plated PA66, UL94V-0	M2.5, 钢, 镀锌 Steel, Zinc Plated 磷青铜镀镍或不锈钢 Phosphor bronze, Ni plated or stainless steel 黄铜, 镀锡 Brass, Tin plated PA66, UL94V-0
电气性能 ELECTRICAL	UL IEC 额定电压 Rated voltage 300V 250V 额定电流 Rated current 15A 22A 接触电阻 Contact resistance 20mΩ 绝缘电阻 Insulation resistance 500MΩ/DC500V 耐压 Withstanding voltage AC2000V/1min 使用线径 Wire range 24-14AWG 2.5mm ²	UL IEC 额定电压 Rated voltage 300V 250V 额定电流 Rated current 15A 22A 接触电阻 Contact resistance 20mΩ 绝缘电阻 Insulation resistance 500MΩ/DC500V 耐压 Withstanding voltage AC2000V/1min 使用线径 Wire range 22-14AWG 0.5-2.5mm ²	UL IEC 额定电压 Rated voltage 300V 250V 额定电流 Rated current 15A 22A 接触电阻 Contact resistance 20mΩ 绝缘电阻 Insulation resistance 500MΩ/DC500V 耐压 Withstanding voltage AC2000V/1min 使用线径 Wire range 22-14AWG 0.5-2.5mm ²
机械性能 MECHANICAL	温度范围 Temp. range -40°C~+105°C 瞬时温度 Max. soldering +250°C, 5sec 扭矩 Torque 0.4N.m 3.5Lb.in 剥线长度 Strip length 6-7mm	温度范围 Temp. range -40°C~+105°C 瞬时温度 Max. soldering +250°C, 5sec 扭矩 Torque 0.4N.m 3.5Lb.in 剥线长度 Strip length 6-7mm	温度范围 Temp. range -40°C~+105°C 瞬时温度 Max. soldering +250°C, 5sec 扭矩 Torque 0.4N.m 3.5Lb.in 剥线长度 Strip length 6-7mm

产品照片 PRODUCT PHOTO			
	Pitch:5.00mm	Pitch:5.00mm	Pitch:5.00mm
产品图纸 PRODUCT PLAN			
	N=Number of contacts	N=Number of contacts	N=Number of contacts
产品型号 MODEL	KF168	KF169	KF170V
材质&电镀 MATERIAL	M2.5, 钢, 镀锌 Steel, Zinc Plated 黄铜, 镀锡 Brass, Ni plated 黄铜, 镀锡 Brass, Tin plated PA66, UL94V-0	M2.5, 钢, 镀锌 Steel, Zinc Plated 黄铜, 镀锡 Brass, Ni plated 黄铜, 镀锡 Brass, Tin plated PA66, UL94V-0	M2.5, 钢, 镀锌 Steel, Zinc Plated 黄铜, 镀锡 Brass, Ni plated 黄铜, 镀锡 Brass, Tin plated PA66, UL94V-0
电气性能 ELECTRICAL	UL IEC 额定电压 Rated voltage 300V 250V 额定电流 Rated current 15A 22A 接触电阻 Contact resistance 20mΩ 绝缘电阻 Insulation resistance 500MΩ/DC500V 耐压 Withstanding voltage AC2000V/1min 使用线径 Wire range 22-14AWG 2.5mm ²	UL IEC 额定电压 Rated voltage 300V 250V 额定电流 Rated current 15A 22A 接触电阻 Contact resistance 20mΩ 绝缘电阻 Insulation resistance 500MΩ/DC500V 耐压 Withstanding voltage AC2000V/1min 使用线径 Wire range 22-14AWG 0.5-2.5mm ²	UL IEC 额定电压 Rated voltage 300V 250V 额定电流 Rated current 15A 24A 接触电阻 Contact resistance 20mΩ 绝缘电阻 Insulation resistance 500MΩ/DC500V 耐压 Withstanding voltage AC2000V/1min 使用线径 Wire range 24-14AWG 2.5mm ²
机械性能 MECHANICAL	温度范围 Temp. range -40°C~+105°C 瞬时温度 Max. soldering +250°C, 5sec 扭矩 Torque 0.4N.m 3.5Lb.in 剥线长度 Strip length 5-6mm	温度范围 Temp. range -40°C~+105°C 瞬时温度 Max. soldering +250°C, 5sec 扭矩 Torque 0.4N.m 3.5Lb.in 剥线长度 Strip length 5-6mm	温度范围 Temp. range -40°C~+105°C 瞬时温度 Max. soldering +250°C, 5sec 扭矩 Torque 0.4N.m 3.5Lb.in 剥线长度 Strip length 5-6mm






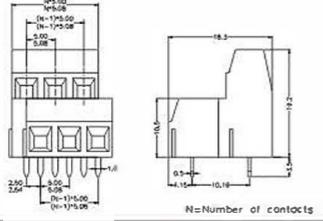
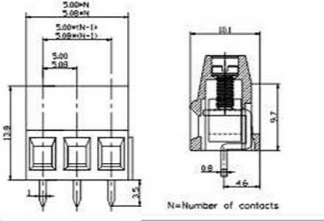
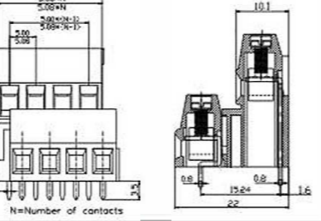
产品照片 PRODUCT PHOTO			
	Pitch:5.00mm	Pitch:3.50/3.81mm	Pitch:5.0/5.08mm
产品图纸 PRODUCT PLAN			
产品型号 MODEL	KF170R	KF102	KF102
材质&电镀 MATERIAL	M2.5, 钢, 镀锌 Steel, Zinc Plated 螺丝 Screw 方盒 Clamp 焊针 Pin header 塑件 Housing PA66, UL94V-0	M2.0, 钢, 镀锌 Steel, Zinc Plated 黄铜, 镀镍 Brass, Ni plated 黄铜, 镀锡 Brass, Tin plated PA66, UL94V-0	M2.5, 钢, 镀锌 Steel, Zinc Plated 黄铜, 镀镍 Brass, Ni plated 黄铜, 镀锡 Brass, Tin plated PA66, UL94V-0
电气性能 ELECTRICAL	UL IEC 额定电压 Rated voltage 300V 250V 额定电流 Rated current 15A 24A 接触电阻 Contact resistance 20mΩ 绝缘电阻 Insulation resistance 500MΩ/DC500V AC2000V/1min 耐电压 Withstanding voltage 使用线径 Wire range 24-14AWG 2.5mm ²	UL IEC 额定电压 Rated voltage 300V 130V 额定电流 Rated current 10A 10A 接触电阻 Contact resistance 20mΩ 绝缘电阻 Insulation resistance 500MΩ/DC500V AC1500V/1min 耐电压 Withstanding voltage 使用线径 Wire range 24-16AWG 1.5mm ²	UL IEC 额定电压 Rated voltage 300V 250V 额定电流 Rated current 15A 15A 接触电阻 Contact resistance 20mΩ 绝缘电阻 Insulation resistance 500MΩ/DC500V AC2000V/1min 耐电压 Withstanding voltage 使用线径 Wire range 24-14AWG 2.5mm ²
机械性能 MECHANICAL	温度范围 Temp. range -40°C~+105°C 瞬时温度 Max. soldering +250°C, 5sec 扭矩 Torque 0.4N.m 3.5lb.in 剥线长度 Strip length 5-6mm	温度范围 Temp. range -40°C~+105°C 瞬时温度 Max. soldering +250°C, 5sec 扭矩 Torque 0.2N.m 1.7lb.in 剥线长度 Strip length 4-5mm	温度范围 Temp. range -40°C~+105°C 瞬时温度 Max. soldering +250°C, 5sec 扭矩 Torque 0.4N.m 3.5lb.in 剥线长度 Strip length 6mm




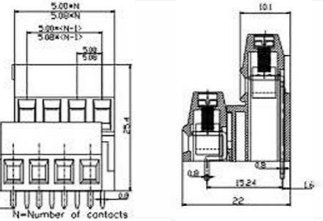
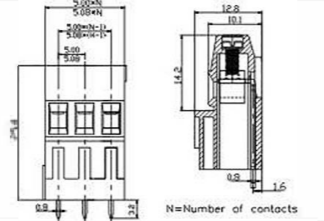
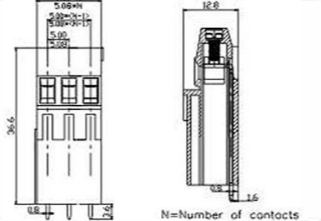
产品照片 PRODUCT PHOTO			
	Pitch:3.50/3.81/3.96mm	Pitch:3.50/3.81/3.96mm	Pitch:3.50/3.81/3.96mm
产品图纸 PRODUCT PLAN			
产品型号 MODEL	KF124	KF124D	KF124G
材质&电镀 MATERIAL	M2.0, 钢, 镀锌 Steel, Zinc Plated 螺丝 Screw 方盒 Clamp 焊针 Pin header 塑件 Housing PA66, UL94V-0	M2.0, 钢, 镀锌 Steel, Zinc Plated 黄铜, 镀镍 Brass, Ni plated 黄铜, 镀锡 Brass, Tin plated PA66, UL94V-0	M2.0, 钢, 镀锌 Steel, Zinc Plated 黄铜, 镀镍 Brass, Ni plated 黄铜, 镀锡 Brass, Tin plated PA66, UL94V-0
电气性能 ELECTRICAL	UL IEC 额定电压 Rated voltage 150V 130V 额定电流 Rated current 10A 10A 接触电阻 Contact resistance 20mΩ 绝缘电阻 Insulation resistance 500MΩ/DC500V AC1500V/1min 耐电压 Withstanding voltage 使用线径 Wire range 24-16AWG 1.5mm ²	UL IEC 额定电压 Rated voltage 150V 130V 额定电流 Rated current 10A 10A 接触电阻 Contact resistance 20mΩ 绝缘电阻 Insulation resistance 500MΩ/DC500V AC1500V/1min 耐电压 Withstanding voltage 使用线径 Wire range 24-16AWG 1.5mm ²	UL IEC 额定电压 Rated voltage 150V 130V 额定电流 Rated current 10A 10A 接触电阻 Contact resistance 20mΩ 绝缘电阻 Insulation resistance 500MΩ/DC500V AC1500V/1min 耐电压 Withstanding voltage 使用线径 Wire range 24-16AWG 1.5mm ²
机械性能 MECHANICAL	温度范围 Temp. range -40°C~+105°C 瞬时温度 Max. soldering +250°C, 5sec 扭矩 Torque 0.2N.m 1.7lb.in 剥线长度 Strip length 5-6mm	温度范围 Temp. range -40°C~+105°C 瞬时温度 Max. soldering +250°C, 5sec 扭矩 Torque 0.2N.m 1.7lb.in 剥线长度 Strip length 5-6mm	温度范围 Temp. range -40°C~+105°C 瞬时温度 Max. soldering +250°C, 5sec 扭矩 Torque 0.2N.m 1.7lb.in 剥线长度 Strip length 5-6mm




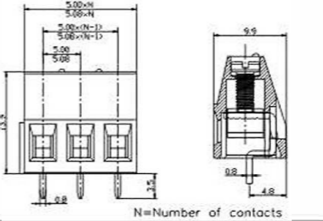
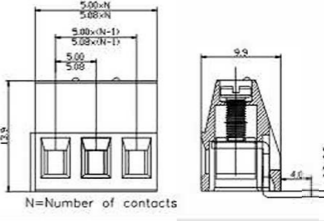
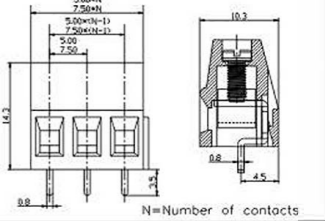
产品照片 PRODUCT PHOTO			
	Pitch:5.00mm	Pitch:5.0/5.08mm	Pitch:2.54mm
产品图纸 PRODUCT PLAN			
产品型号 MODEL	KF103	KF104	KF120
材质&电镀 MATERIAL	M2.5, 钢, 镀锌 Steel, Zinc Plated 螺丝 Screw 方盒 Clamp 焊针 Pin header 塑件 Housing PA66, UL94V-0	M3.0, 钢, 镀锌 Steel, Zinc Plated 黄铜, 镀镍 Brass, Ni plated 黄铜, 镀锡 Brass, Tin plated PA66, UL94V-0	M1.6, 钢, 镀锌 Steel, Zinc Plated 黄铜, 镀镍 Brass, Ni plated 黄铜, 镀锡 Brass, Tin plated PA66, UL94V-0
电气性能 ELECTRICAL	UL IEC 额定电压 Rated voltage 300V 250V 额定电流 Rated current 10A 24A 接触电阻 Contact resistance 20mΩ 绝缘电阻 Insulation resistance 500MΩ/DC500V AC2000V/1min 耐电压 Withstanding voltage 使用线径 Wire range 24-12AWG 2.5mm ²	UL IEC 额定电压 Rated voltage 300V 250V 额定电流 Rated current 15A 24A 接触电阻 Contact resistance 20mΩ 绝缘电阻 Insulation resistance 500MΩ/DC500V AC2000V/1min 耐电压 Withstanding voltage 使用线径 Wire range 24-14AWG 2.5mm ²	UL IEC 额定电压 Rated voltage 150V 130V 额定电流 Rated current 6A 8A 接触电阻 Contact resistance 20mΩ 绝缘电阻 Insulation resistance 500MΩ/DC500V AC1500V/1min 耐电压 Withstanding voltage 使用线径 Wire range 26-18AWG 1.0mm ²
机械性能 MECHANICAL	温度范围 Temp. range -40°C~+105°C 瞬时温度 Max. soldering +250°C, 5sec 扭矩 Torque 0.4N.m 3.5lb.in 剥线长度 Strip length 6-7mm	温度范围 Temp. range -40°C~+105°C 瞬时温度 Max. soldering +250°C, 5sec 扭矩 Torque 0.4N.m 3.5lb.in 剥线长度 Strip length 6-7mm	温度范围 Temp. range -40°C~+105°C 瞬时温度 Max. soldering +250°C, 5sec 扭矩 Torque 0.1N.m 0.89lb.in 剥线长度 Strip length 3.7-4.7mm


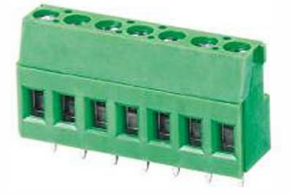

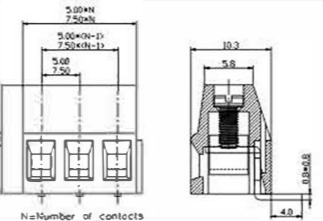
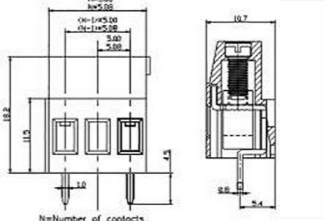
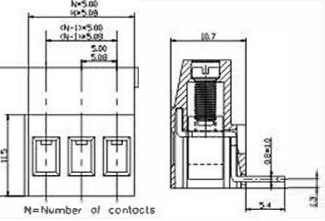
产品照片 PRODUCT PHOTO			
	Pitch:3.50/3.81/3.96mm	Pitch:3.50/3.81/3.96mm	Pitch:5.00/5.08mm
产品图纸 PRODUCT PLAN			
产品型号 MODEL	KF124DGA	KF124DGB	KF127
材质&电镀 MATERIAL	M2.0, 钢, 镀锌 Steel, Zinc Plated 螺丝 Screw 方盒 Clamp 焊针 Pin header 塑件 Housing PA66, UL94V-0	M2.0, 钢, 镀锌 Steel, Zinc Plated 黄铜, 镀镍 Brass, Ni plated 黄铜, 镀锡 Brass, Tin plated PA66, UL94V-0	M2.5, 钢, 镀锌 Steel, Zinc Plated 黄铜, 镀镍 Brass, Ni plated 黄铜, 镀锡 Brass, Tin plated PA66, UL94V-0
电气性能 ELECTRICAL	UL IEC 额定电压 Rated voltage 150V 130V 额定电流 Rated current 10A 10A 接触电阻 Contact resistance 20mΩ 绝缘电阻 Insulation resistance 500MΩ/DC500V AC1500V/1min 耐电压 Withstanding voltage 使用线径 Wire range 24-16AWG 1.5mm ²	UL IEC 额定电压 Rated voltage 150V 130V 额定电流 Rated current 10A 10A 接触电阻 Contact resistance 20mΩ 绝缘电阻 Insulation resistance 500MΩ/DC500V AC1500V/1min 耐电压 Withstanding voltage 使用线径 Wire range 24-16AWG 1.5mm ²	UL IEC 额定电压 Rated voltage 300V 250V 额定电流 Rated current 12A 15A 接触电阻 Contact resistance 20mΩ 绝缘电阻 Insulation resistance 500MΩ/DC500V AC2000V/1min 耐电压 Withstanding voltage 使用线径 Wire range 26-14AWG 2.5mm ²
机械性能 MECHANICAL	温度范围 Temp. range -40°C~+105°C 瞬时温度 Max. soldering +250°C, 5sec 扭矩 Torque 0.2N.m 1.7lb.in 剥线长度 Strip length 6-7mm	温度范围 Temp. range -40°C~+105°C 瞬时温度 Max. soldering +250°C, 5sec 扭矩 Torque 0.2N.m 1.7lb.in 剥线长度 Strip length 6-7mm	温度范围 Temp. range -40°C~+105°C 瞬时温度 Max. soldering +250°C, 5sec 扭矩 Torque 0.4N.m 3.5lb.in 剥线长度 Strip length 5-6mm



产品照片 PRODUCT PHOTO	 Pitch:5.00/5.08mm	 Pitch:5.00/5.08mm	 Pitch:5.00/5.08mm
产品图纸 PRODUCT PLAN			
产品型号 MODEL	KF127DG	KF128D	KF128DGA
材质&电镀 MATERIAL	M2.5, 钢, 镀锌 Steel, Zinc Plated 螺丝 Screw 方盒 Clamp 焊针 Pin header 塑件 Housing PA66, UL94V-0	M2.5, 钢, 镀锌 Steel, Zinc Plated 黄铜, 镀镍 Brass, Ni plated 黄铜, 镀锡 Brass, Tin plated PA66, UL94V-0	M2.5, 钢, 镀锌 Steel, Zinc Plated 黄铜, 镀镍 Brass, Ni plated 黄铜, 镀锡 Brass, Tin plated PA66, UL94V-0
电气性能 ELECTRICAL	UL IEC 额定电压 Rated voltage 300V 250V 额定电流 Rated current 12A 15A 接触电阻 Contact resistance 20mΩ 绝缘电阻 Insulation resistance 500MΩ/DC500V 耐压 Withstanding voltage AC2000V/1min 使用线径 Wire range 26-14AWG 2.5mm ²	UL IEC 额定电压 Rated voltage 300V 250V 额定电流 Rated current 15A 18A 接触电阻 Contact resistance 20mΩ 绝缘电阻 Insulation resistance 500MΩ/DC500V 耐压 Withstanding voltage AC2000V/1min 使用线径 Wire range 24-14AWG 2.5mm ²	UL IEC 额定电压 Rated voltage 300V 250V 额定电流 Rated current 15A 18A 接触电阻 Contact resistance 20mΩ 绝缘电阻 Insulation resistance 500MΩ/DC500V 耐压 Withstanding voltage AC2000V/1min 使用线径 Wire range 24-14AWG 2.5mm ²
机械性能 MECHANICAL	温度范围 Temp. range -40°C~+105°C 瞬时温度 Max. soldering +250°C, 5sec 扭矩 Torque 0.4N.m 3.5lb.in 剥线长度 Strip length 6-7mm	温度范围 Temp. range -40°C~+105°C 瞬时温度 Max. soldering +250°C, 5sec 扭矩 Torque 0.4N.m 3.5lb.in 剥线长度 Strip length 6-7mm	温度范围 Temp. range -40°C~+105°C 瞬时温度 Max. soldering +250°C, 5sec 扭矩 Torque 0.4N.m 3.5lb.in 剥线长度 Strip length 6-7mm

产品照片 PRODUCT PHOTO	 Pitch:5.00/5.08mm	 Pitch:5.00/5.08mm	 Pitch:5.00/5.08mm
产品图纸 PRODUCT PLAN			
产品型号 MODEL	KF128DGB	KF128G	KF128GG
材质&电镀 MATERIAL	M2.5, 钢, 镀锌 Steel, Zinc Plated 螺丝 Screw 方盒 Clamp 焊针 Pin header 塑件 Housing PA66, UL94V-0	M2.5, 钢, 镀锌 Steel, Zinc Plated 黄铜, 镀镍 Brass, Ni plated 黄铜, 镀锡 Brass, Tin plated PA66, UL94V-0	M2.5, 钢, 镀锌 Steel, Zinc Plated 黄铜, 镀镍 Brass, Ni plated 黄铜, 镀锡 Brass, Tin plated PA66, UL94V-0
电气性能 ELECTRICAL	UL IEC 额定电压 Rated voltage 300V 250V 额定电流 Rated current 15A 18A 接触电阻 Contact resistance 20mΩ 绝缘电阻 Insulation resistance 500MΩ/DC500V 耐压 Withstanding voltage AC2000V/1min 使用线径 Wire range 24-14AWG 2.5mm ²	UL IEC 额定电压 Rated voltage 300V 250V 额定电流 Rated current 15A 24A 接触电阻 Contact resistance 20mΩ 绝缘电阻 Insulation resistance 500MΩ/DC500V 耐压 Withstanding voltage AC2000V/1min 使用线径 Wire range 24-14AWG 2.5mm ²	UL IEC 额定电压 Rated voltage 300V 250V 额定电流 Rated current 15A 24A 接触电阻 Contact resistance 20mΩ 绝缘电阻 Insulation resistance 500MΩ/DC500V 耐压 Withstanding voltage AC2000V/1min 使用线径 Wire range 28-14AWG 2.5mm ²
机械性能 MECHANICAL	温度范围 Temp. range -40°C~+105°C 瞬时温度 Max. soldering +250°C, 5sec 扭矩 Torque 0.4N.m 3.5lb.in 剥线长度 Strip length 6-7mm	温度范围 Temp. range -40°C~+105°C 瞬时温度 Max. soldering +250°C, 5sec 扭矩 Torque 0.4N.m 3.5lb.in 剥线长度 Strip length 6-7mm	温度范围 Temp. range -40°C~+105°C 瞬时温度 Max. soldering +250°C, 5sec 扭矩 Torque 0.4N.m 3.5lb.in 剥线长度 Strip length 6-7mm

产品照片 PRODUCT PHOTO	 Pitch:5.00/5.08mm	 Pitch:5.00/5.08mm	 Pitch:5.00/7.50mm
产品图纸 PRODUCT PLAN			
产品型号 MODEL	KF128V (H:13.9)	KF128R (H:13.9)	KF128V (H:14.3)
材质&电镀 MATERIAL	M2.5, 钢, 镀锌 Steel, Zinc Plated 螺丝 Screw 方盒 Clamp 焊针 Pin header 塑件 Housing PA66, UL94V-0	M2.5, 钢, 镀锌 Steel, Zinc Plated 黄铜, 镀镍 Brass, Ni plated 黄铜, 镀锡 Brass, Tin plated PA66, UL94V-0	M2.5, 钢, 镀锌 Steel, Zinc Plated 黄铜, 镀镍 Brass, Ni plated 黄铜, 镀锡 Brass, Tin plated PA66, UL94V-0
电气性能 ELECTRICAL	UL IEC 额定电压 Rated voltage 300V 250V 额定电流 Rated current 10A 18A 接触电阻 Contact resistance 20mΩ 绝缘电阻 Insulation resistance 500MΩ/DC500V 耐压 Withstanding voltage AC2000V/1min 使用线径 Wire range 24-12AWG 2.5mm ²	UL IEC 额定电压 Rated voltage 300V 250V 额定电流 Rated current 10A 18A 接触电阻 Contact resistance 20mΩ 绝缘电阻 Insulation resistance 500MΩ/DC500V 耐压 Withstanding voltage AC2000V/1min 使用线径 Wire range 24-12AWG 2.5mm ²	UL IEC 额定电压 Rated voltage 300V 250V 额定电流 Rated current 10A 18A 接触电阻 Contact resistance 20mΩ 绝缘电阻 Insulation resistance 500MΩ/DC500V 耐压 Withstanding voltage AC2500V/1min 使用线径 Wire range 24-12AWG 2.5mm ²
机械性能 MECHANICAL	温度范围 Temp. range -40°C~+105°C 瞬时温度 Max. soldering +250°C, 5sec 扭矩 Torque 0.4N.m 3.5lb.in 剥线长度 Strip length 6-7mm	温度范围 Temp. range -40°C~+105°C 瞬时温度 Max. soldering +250°C, 5sec 扭矩 Torque 0.4N.m 3.5lb.in 剥线长度 Strip length 6-7mm	温度范围 Temp. range -40°C~+105°C 瞬时温度 Max. soldering +250°C, 5sec 扭矩 Torque 0.4N.m 3.5lb.in 剥线长度 Strip length 6-7mm

产品照片 PRODUCT PHOTO	 Pitch:5.00/7.50mm	 Pitch:5.00/5.08mm	 Pitch:5.00/5.08mm
产品图纸 PRODUCT PLAN			
产品型号 MODEL	KF128R (H:14.3)	KF129V	KF129R
材质&电镀 MATERIAL	M2.5, 钢, 镀锌 Steel, Zinc Plated 螺丝 Screw 方盒 Clamp 焊针 Pin header 塑件 Housing PA66, UL94V-0	M3.0, 钢, 镀锌 Steel, Zinc Plated 黄铜, 镀镍 Brass, Ni plated 黄铜, 镀锡 Brass, Tin plated PA66, UL94V-0	M3.0, 钢, 镀锌 Steel, Zinc Plated 黄铜, 镀镍 Brass, Ni plated 黄铜, 镀锡 Brass, Tin plated PA66, UL94V-0
电气性能 ELECTRICAL	UL IEC 额定电压 Rated voltage 300V 250V 额定电流 Rated current 10A 18A 接触电阻 Contact resistance 20mΩ 绝缘电阻 Insulation resistance 500MΩ/DC500V 耐压 Withstanding voltage AC2000V/1min 使用线径 Wire range 24-12AWG 2.5mm ²	UL IEC 额定电压 Rated voltage 300V 250V 额定电流 Rated current 20A 20A 接触电阻 Contact resistance 20mΩ 绝缘电阻 Insulation resistance 500MΩ/DC500V 耐压 Withstanding voltage AC2000V/1min 使用线径 Wire range 24-12AWG 4.0mm ²	UL IEC 额定电压 Rated voltage 300V 250V 额定电流 Rated current 20A 20A 接触电阻 Contact resistance 20mΩ 绝缘电阻 Insulation resistance 500MΩ/DC500V 耐压 Withstanding voltage AC2000V/1min 使用线径 Wire range 24-12AWG 4.0mm ²
机械性能 MECHANICAL	温度范围 Temp. range -40°C~+105°C 瞬时温度 Max. soldering +250°C, 5sec 扭矩 Torque 0.4N.m 3.5lb.in 剥线长度 Strip length 6-7mm	温度范围 Temp. range -40°C~+105°C 瞬时温度 Max. soldering +250°C, 5sec 扭矩 Torque 0.5N.m 4.4lb.in 剥线长度 Strip length 6-7mm	温度范围 Temp. range -40°C~+105°C 瞬时温度 Max. soldering +250°C, 5sec 扭矩 Torque 0.5N.m 4.4lb.in 剥线长度 Strip length 6-7mm



产品照片 PRODUCT PHOTO			
	Pitch:7.50/7.62mm	Pitch:7.50/7.62mm	Pitch:5.0/5.08mm
产品图纸 PRODUCT PLAN			
产品型号 MODEL	KF129V	KF129R	KF129C
材质&电镀 MATERIAL	M3.0, 钢, 镀锌 Steel, Zinc Plated 螺丝 Screw 方盒 Clamp 焊针 Pin header 塑件 Housing PA66, UL94V-0	M3.0, 钢, 镀锌 Steel, Zinc Plated 螺丝 Screw 方盒 Clamp 焊针 Pin header 塑件 Housing PA66, UL94V-0	M3.0, 钢, 镀锌 Steel, Zinc Plated 螺丝 Screw 方盒 Clamp 焊针 Pin header 塑件 Housing PA66, UL94V-0
电气性能 ELECTRICAL	UL 额定电压 Rated voltage 300V 额定电流 Rated current 20A 接触电阻 Contact resistance 20mΩ 绝缘电阻 Insulation resistance 500MΩ/DC500V 耐压 Withstanding voltage AC2500V/1min 使用线径 Wire range 24-12AWG 4.0mm ²	IEC 额定电压 Rated voltage 450V 额定电流 Rated current 20A 接触电阻 Contact resistance 20mΩ 绝缘电阻 Insulation resistance 500MΩ/DC500V 耐压 Withstanding voltage AC2500V/1min 使用线径 Wire range 24-12AWG 4.0mm ²	UL 额定电压 Rated voltage 300V 额定电流 Rated current 20A 接触电阻 Contact resistance 20mΩ 绝缘电阻 Insulation resistance 500MΩ/DC500V 耐压 Withstanding voltage AC2000V/1min 使用线径 Wire range 24-12AWG 4.0mm ²
机械性能 MECHANICAL	温度范围 Temp. range -40°C~+105°C 瞬时温度 Max. soldering +250°C, 5sec 扭矩 Torque 0.5N.m 4.4Lb.in 剥线长度 Strip length 6-7mm	温度范围 Temp. range -40°C~+105°C 瞬时温度 Max. soldering +250°C, 5sec 扭矩 Torque 0.5N.m 4.4Lb.in 剥线长度 Strip length 6-7mm	温度范围 Temp. range -40°C~+105°C 瞬时温度 Max. soldering +250°C, 5sec 扭矩 Torque 0.5N.m 4.4Lb.in 剥线长度 Strip length 6-7mm

产品照片 PRODUCT PHOTO			
	Pitch:6.35mm	Pitch:9.50mm	Pitch:7.62mm
产品图纸 PRODUCT PLAN			
产品型号 MODEL	KF635	KF950	KF950A
材质&电镀 MATERIAL	M3.0, 钢, 镀锌 Steel, Zinc Plated 螺丝 Screw 方盒 Clamp 焊针 Pin header 塑件 Housing PA66, UL94V-0	M3.0, 钢, 镀锌 Steel, Zinc Plated 螺丝 Screw 方盒 Clamp 焊针 Pin header 塑件 Housing PA66, UL94V-0	M3.0, 钢, 镀锌 Steel, Zinc Plated 螺丝 Screw 方盒 Clamp 焊针 Pin header 塑件 Housing PA66, UL94V-0
电气性能 ELECTRICAL	UL 额定电压 Rated voltage 300V 额定电流 Rated current 30A 接触电阻 Contact resistance 20mΩ 绝缘电阻 Insulation resistance 500MΩ/DC500V 耐压 Withstanding voltage AC3000V/1min 使用线径 Wire range 26-10AWG 6.0mm ²	IEC 额定电压 Rated voltage 450V 额定电流 Rated current 41A 接触电阻 Contact resistance 20mΩ 绝缘电阻 Insulation resistance 500MΩ/DC500V 耐压 Withstanding voltage AC3000V/1min 使用线径 Wire range 26-10AWG 6.0mm ²	UL 额定电压 Rated voltage 300V 额定电流 Rated current 30A 接触电阻 Contact resistance 20mΩ 绝缘电阻 Insulation resistance 500MΩ/DC500V 耐压 Withstanding voltage AC3000V/1min 使用线径 Wire range 26-10AWG 6.0mm ²
机械性能 MECHANICAL	温度范围 Temp. range -40°C~+105°C 瞬时温度 Max. soldering +250°C, 5sec 扭矩 Torque 0.5N.m 4.4Lb.in 剥线长度 Strip length 6-7mm	温度范围 Temp. range -40°C~+105°C 瞬时温度 Max. soldering +250°C, 5sec 扭矩 Torque 0.5N.m 4.4Lb.in 剥线长度 Strip length 6-7mm	温度范围 Temp. range -40°C~+105°C 瞬时温度 Max. soldering +250°C, 5sec 扭矩 Torque 0.5N.m 4.4Lb.in 剥线长度 Strip length 6-7mm

产品照片 PRODUCT PHOTO			
	Pitch:7.62mm	Pitch:10.16mm	Pitch:10.16mm
产品图纸 PRODUCT PLAN			
产品型号 MODEL	KF950A	KF135	KF136
材质&电镀 MATERIAL	M3.0, 钢, 镀锌 Steel, Zinc Plated 螺丝 Screw 方盒 Clamp 焊针 Pin header 塑件 Housing PA66, UL94V-0	M4.0, 钢, 镀锌 Steel, Zinc Plated 螺丝 Screw 方盒 Clamp 焊针 Pin header 塑件 Housing PA66, UL94V-0	M4.0, 钢, 镀锌 Steel, Zinc Plated 紫铜, 镀镍 Copper, Ni plated 黄铜, 镀锡 Brass, Tin plated PA66, UL94V-0
电气性能 ELECTRICAL	UL 额定电压 Rated voltage 300V 额定电流 Rated current 30A 接触电阻 Contact resistance 20mΩ 绝缘电阻 Insulation resistance 500MΩ/DC500V 耐压 Withstanding voltage AC3000V/1min 使用线径 Wire range 26-10AWG 6.0mm ²	IEC 额定电压 Rated voltage 750V 额定电流 Rated current 65A 接触电阻 Contact resistance 20mΩ 绝缘电阻 Insulation resistance 500MΩ/DC500V 耐压 Withstanding voltage AC3000V/1min 使用线径 Wire range 20-6AWG 16.0mm ²	UL 额定电压 Rated voltage 600V 额定电流 Rated current 65A 接触电阻 Contact resistance 20mΩ 绝缘电阻 Insulation resistance 500MΩ/DC500V 耐压 Withstanding voltage AC3000V/1min 使用线径 Wire range 20-6AWG 16.0mm ²
机械性能 MECHANICAL	温度范围 Temp. range -40°C~+105°C 瞬时温度 Max. soldering +250°C, 5sec 扭矩 Torque 0.5N.m 4.4Lb.in 剥线长度 Strip length 6-7mm	温度范围 Temp. range -40°C~+105°C 瞬时温度 Max. soldering +250°C, 5sec 扭矩 Torque 1.2N.m 10.6Lb.in 剥线长度 Strip length 10mm	温度范围 Temp. range -40°C~+105°C 瞬时温度 Max. soldering +250°C, 5sec 扭矩 Torque 1.2N.m 10.5Lb.in 剥线长度 Strip length 10mm

产品照片 PRODUCT PHOTO			
	Pitch:10.16mm	Pitch:15.00mm	Pitch:6.00mm
产品图纸 PRODUCT PLAN			
产品型号 MODEL	KF136HT	KF137	RU10-T85
材质&电镀 MATERIAL	M4.0, 钢, 镀锌 Steel, Zinc Plated 紫铜, 镀镍 Copper, Ni plated 黄铜, 镀锡 Brass, Tin plated PA66, UL94V-0	M5.0, 钢, 镀锌 Steel, Zinc Plated 钢, 镀镍 Steel, Ni plated 黄铜, 镀锡 Brass, Tin plated PA66, UL94V-0	M4.0, 钢, 镀锌 Steel, Zinc Plated 黄铜, 镀锡 Brass, Ni plated
电气性能 ELECTRICAL	UL 额定电压 Rated voltage 600V 额定电流 Rated current 65A 接触电阻 Contact resistance 20mΩ 绝缘电阻 Insulation resistance 500MΩ/DC500V 耐压 Withstanding voltage AC3000V/1min 使用线径 Wire range 20-6AWG 16.0mm ²	IEC 额定电压 Rated voltage 1000V 额定电流 Rated current 125A 接触电阻 Contact resistance 20mΩ 绝缘电阻 Insulation resistance 500MΩ/DC500V 耐压 Withstanding voltage AC3500V/1min 使用线径 Wire range 20-2AWG 35.0mm ²	IEC 额定电压 Rated voltage 450V 额定电流 Rated current 57A 接触电阻 Contact resistance - 绝缘电阻 Insulation resistance - 耐压 Withstanding voltage - 使用线径 Wire range -
机械性能 MECHANICAL	温度范围 Temp. range -40°C~+105°C 瞬时温度 Max. soldering +250°C, 5sec 扭矩 Torque 1.2N.m 10.5Lb.in 剥线长度 Strip length 10mm	温度范围 Temp. range -40°C~+105°C 瞬时温度 Max. soldering +250°C, 5sec 扭矩 Torque 2.0N.m 17.5Lb.in 剥线长度 Strip length 15-18mm	温度范围 Temp. range -40°C~+125°C 瞬时温度 Max. soldering +250°C, 5sec 扭矩 Torque 1.2N.m 10.5Lb.in 剥线长度 Strip length 10mm