




ISO9001 ISO14001 OHSAS18001 CB RoHS REACH

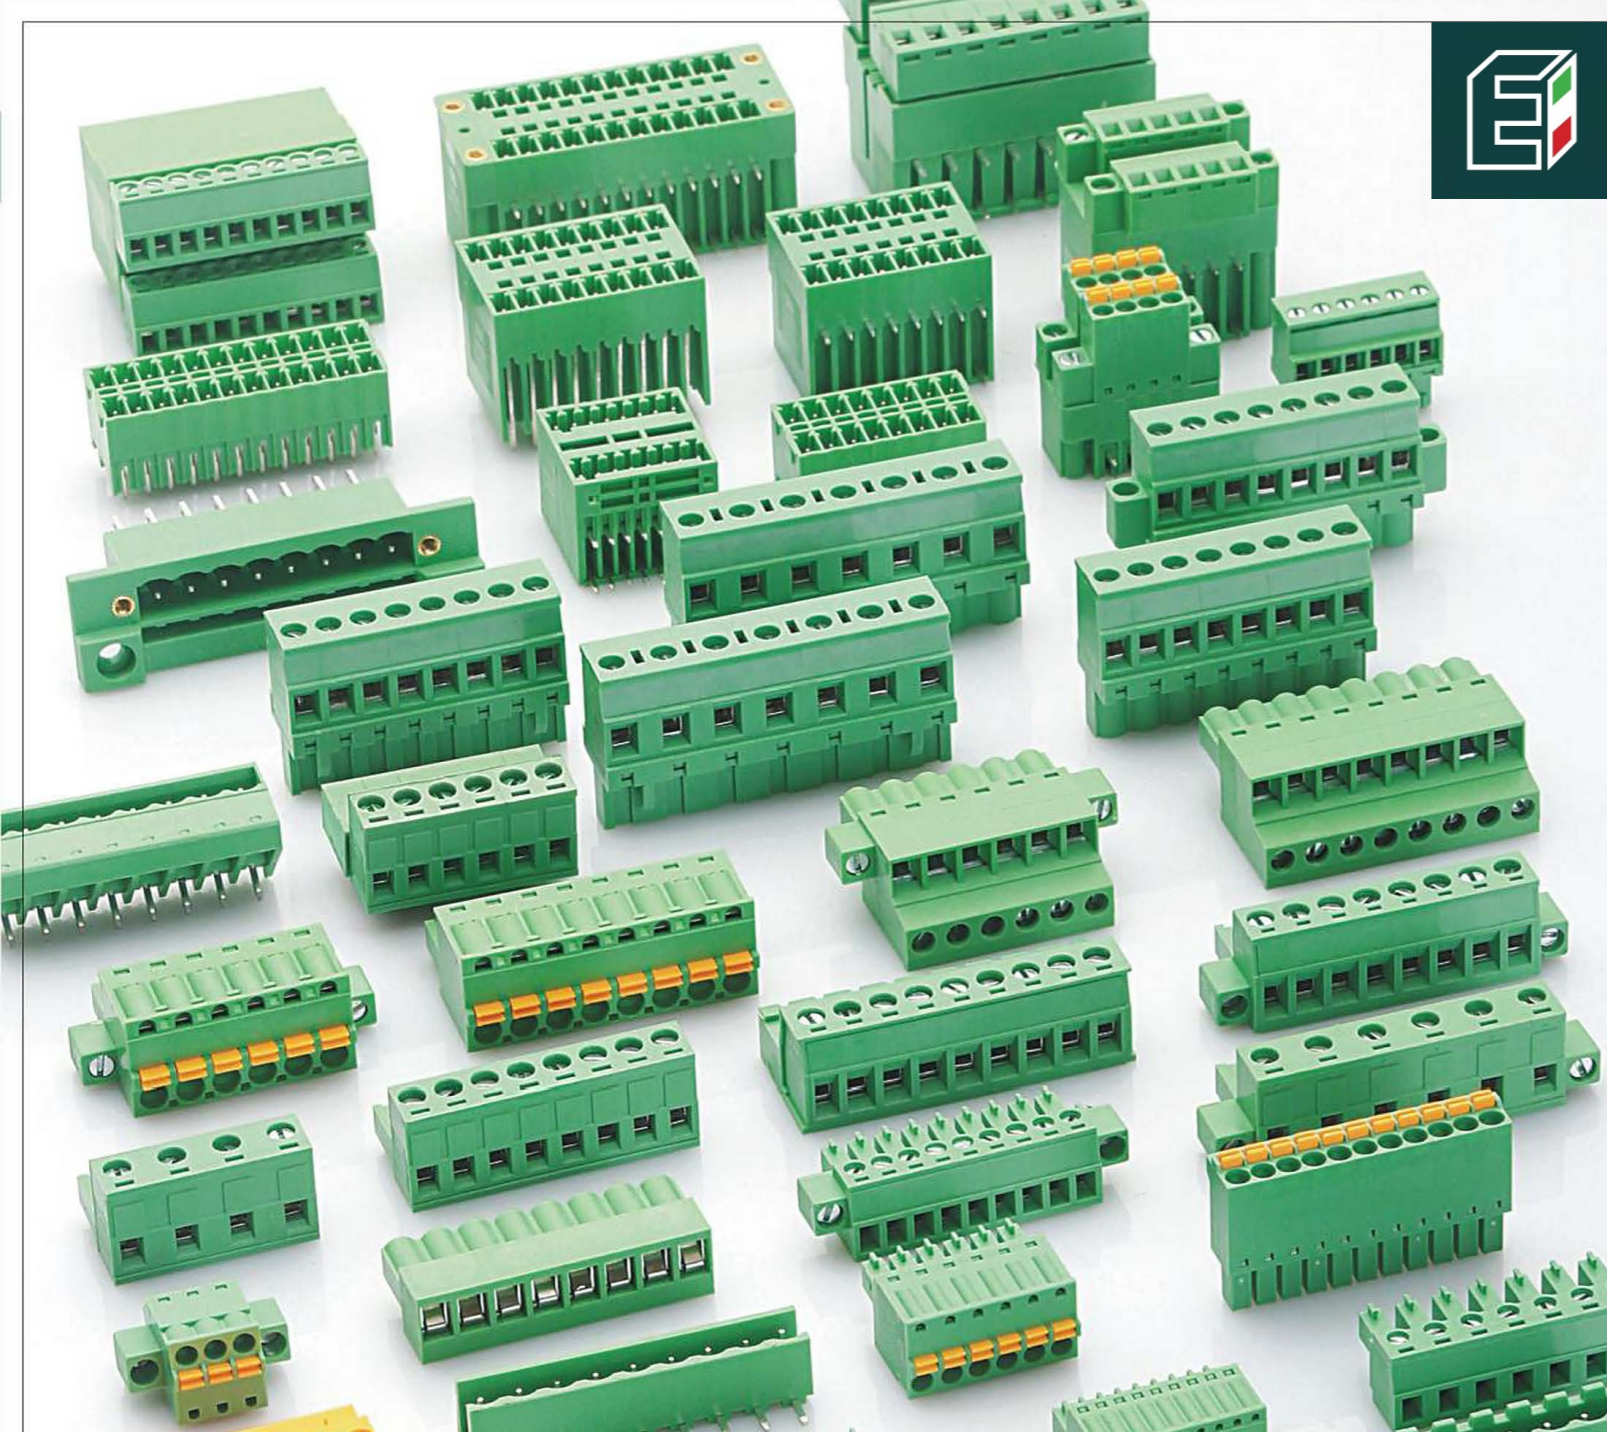

# 插座式端子台 PLUGGABLE TERMINAL BLOCKS

插座式端子台提供2.54mm、3.5mm、3.81mm、5.0mm、5.08mm、7.5mm、7.62mm等不同间距的插头。为了应用不同场合的使用需要，提供水平插头、垂直插头、与同方向进线插头等选择。产品设计符合IEC60998、UL1059等国际标准并通过UL、VDE等认证。

Pluggable terminal blocks, Available different pitches can be chose, you can choose the insert direction, contact direction, plug-in direction according your requirement. The products are designed in accordance with IEC60998、UL1059standards and we have got the approvals of UL, VDE, etc.



25/ www.nb-kaifeng.com

tel. 02.3361.1626 info@elitaliaweb.it  
fax 02.2626.1009 www.elitaliaweb.it

<b>产品照片</b> PRODUCT PHOTO	 Pitch:2.54mm	 Pitch:2.50mm	 Pitch:2.50/2.54mm
<b>产品图纸</b> PRODUCT PLAN	 N=Number of contacts	 N=Number of contacts	 N=Number of contacts
<b>产品型号</b> MODEL	<b>KF12EY</b>	<b>KF12EKD</b>	<b>KF12EZV</b>
<b>材质&amp;电镀</b> MATERIAL	Screw M1.5, 钢, 镀锌 Steel, Zinc Plated Contact 磷青铜 Phosphor Bronze Pin header 磷青铜 Phosphor Bronze Housing PA66, UL94V-0	磷青铜 Phosphor Bronze PA66, UL94V-0	黄铜, 镀锡 Brass, Tin plated PA66, UL94V-0
<b>电气性能</b> ELECTRICAL	<b>UL</b> 150V <b>IEC</b> 130V 5A 10A 20mΩ 500MΩ/DC500V AC1250V/1min 24-20AWG 0.5mm <sup>2</sup>	<b>UL</b> 150V <b>IEC</b> 130V 5A 10A 20mΩ 500MΩ/DC500V AC1250V/1min 24-20AWG 0.5mm <sup>2</sup>	<b>UL</b> 150V <b>IEC</b> 130V 5A 10A 20mΩ 500MΩ/DC500V AC1250V/1min 24-20AWG 0.5mm <sup>2</sup>
<b>机械性能</b> MECHANICAL	温度范围 Temp. range -40℃~+105℃ 瞬时温度 Max. soldering +250℃, 5sec 扭矩 Torque 0.1N.m 0.9lb.in 剥线长度 Strip length 8mm	温度范围 Temp. range -40℃~+105℃ 瞬时温度 Max. soldering +250℃, 5sec 扭矩 Torque 0.1N.m 0.9lb.in 剥线长度 Strip length 8mm	温度范围 Temp. range -40℃~+105℃ 瞬时温度 Max. soldering +250℃, 5sec 扭矩 Torque 0.1N.m 0.9lb.in 剥线长度 Strip length 8mm
<b>产品照片</b> PRODUCT PHOTO	 Pitch:2.50/2.54mm	 Pitch:2.50/2.54mm	 Pitch:2.50/2.54mm
<b>产品图纸</b> PRODUCT PLAN	 N=Number of contacts	 N=Number of contacts	 N=Number of contacts
<b>产品型号</b> MODEL	<b>KF12EZR</b>	<b>KF12EZVH</b>	<b>KF12EZRH</b>
<b>材质&amp;电镀</b> MATERIAL	Screw 黄铜, 镀锡 Brass, Tin plated PA66, UL94V-0 Contact 磷青铜 Phosphor Bronze Pin header 磷青铜 Phosphor Bronze Housing PA66, UL94V-0	黄铜, 镀锡 Brass, Tin plated PA66, UL94V-0	黄铜, 镀锡 Brass, Tin plated PA66, UL94V-0
<b>电气性能</b> ELECTRICAL	<b>UL</b> 150V <b>IEC</b> 130V 5A 10A 20mΩ 500MΩ/DC500V AC1250V/1min	<b>UL</b> 150V <b>IEC</b> 130V 5A 10A 20mΩ 500MΩ/DC500V AC1250V/1min	<b>UL</b> 150V <b>IEC</b> 130V 5A 10A 20mΩ 500MΩ/DC500V AC1250V/1min
<b>机械性能</b> MECHANICAL	温度范围 Temp. range -40℃~+105℃ 瞬时温度 Max. soldering +250℃, 5sec 扭矩 Torque 0.1N.m 0.9lb.in 剥线长度 Strip length 8mm	温度范围 Temp. range -40℃~+105℃ 瞬时温度 Max. soldering +250℃, 5sec 扭矩 Torque 0.1N.m 0.9lb.in 剥线长度 Strip length 8mm	温度范围 Temp. range -40℃~+105℃ 瞬时温度 Max. soldering +250℃, 5sec 扭矩 Torque 0.1N.m 0.9lb.in 剥线长度 Strip length 8mm



www.nb-kaifeng.com / 26

tel. 02.3361.1626 info@elitaliaweb.it  
fax 02.2626.1009 www.elitaliaweb.it





产品照片 PRODUCT PHOTO			
	Pitch:3.50/3.81mm	Pitch:3.50/3.81mm	Pitch:3.50/3.81mm
产品图纸 PRODUCT PLAN			
产品型号 MODEL	<b>KF2EDG-Y</b>	<b>KF2EDGV-Y</b>	<b>KF2EDGR-Y</b>
材质&电镀 MATERIAL	M2.0, 钢, 镀锌 Steel, Zinc Plated 螺丝 Screw 触点 Contact 磷青铜 Phosphor Bronze 焊针 Pin header 塑件 Housing PA66, UL94V-0	黄铜, 镀锡 Brass, Tin plated PA66, UL94V-0	黄铜, 镀锡 Brass, Tin plated PA66, UL94V-0
电气性能 ELECTRICAL	<b>UL</b> <b>IEC</b> 额定电压 Rated voltage 300V 250V 额定电流 Rated current 8A 7A 接触电阻 Contact resistance 20mΩ 绝缘电阻 Insulation resistance 500MΩ/DC500V AC1500V/1min 耐电压 Withstanding voltage AC1500V/1min 使用线径 Wire range 28-16AWG 0.5-1.5mm <sup>2</sup>	<b>UL</b> <b>IEC</b> 额定电压 Rated voltage 300V 250V 额定电流 Rated current 8A 7A 接触电阻 Contact resistance 20mΩ 绝缘电阻 Insulation resistance 500MΩ/DC500V AC1500V/1min 耐电压 Withstanding voltage AC1500V/1min 使用线径 Wire range -	<b>UL</b> <b>IEC</b> 额定电压 Rated voltage 300V 250V 额定电流 Rated current 8A 7A 接触电阻 Contact resistance 20mΩ 绝缘电阻 Insulation resistance 500MΩ/DC500V AC1500V/1min 耐电压 Withstanding voltage AC1500V/1min 使用线径 Wire range -
机械性能 MECHANICAL	温度范围 Temp. range -40°C~+105°C 瞬时温度 Max. soldering +250°C, 5sec 扭矩 Torque 0.2N.m 1.7lb.in 剥线长度 Strip length 6-7mm	温度范围 Temp. range -40°C~+105°C 瞬时温度 Max. soldering +250°C, 5sec 扭矩 Torque - 剥线长度 Strip length -	温度范围 Temp. range -40°C~+105°C 瞬时温度 Max. soldering +250°C, 5sec 扭矩 Torque - 剥线长度 Strip length -

产品照片 PRODUCT PHOTO			
	Pitch:3.50/3.81mm	Pitch:3.50/3.81mm	Pitch:3.50/3.81mm
产品图纸 PRODUCT PLAN			
产品型号 MODEL	<b>KF2EDGM-Y</b>	<b>KF2EDGVM-Y</b>	<b>KF2EDGRM-Y</b>
材质&电镀 MATERIAL	M2.0, 钢, 镀锌 Steel, Zinc Plated 螺丝 Screw 触点 Contact 磷青铜 Phosphor bronze 焊针 Pin header 塑件 Housing PA66, UL94V-0	黄铜, 镀锡 Brass, Tin plated PA66, UL94V-0	黄铜, 镀锡 Brass, Tin plated PA66, UL94V-0
电气性能 ELECTRICAL	<b>UL</b> <b>IEC</b> 额定电压 Rated voltage 300V 250V 额定电流 Rated current 8A 7A 接触电阻 Contact resistance 20mΩ 绝缘电阻 Insulation resistance 500MΩ/DC500V AC1500V/1min 耐电压 Withstanding voltage AC1500V/1min 使用线径 Wire range 28-16AWG 0.5-1.5mm <sup>2</sup>	<b>UL</b> <b>IEC</b> 额定电压 Rated voltage 300V 250V 额定电流 Rated current 8A 7A 接触电阻 Contact resistance 20mΩ 绝缘电阻 Insulation resistance 500MΩ/DC500V AC1500V/1min 耐电压 Withstanding voltage AC1500V/1min 使用线径 Wire range -	<b>UL</b> <b>IEC</b> 额定电压 Rated voltage 300V 250V 额定电流 Rated current 8A 7A 接触电阻 Contact resistance 20mΩ 绝缘电阻 Insulation resistance 500MΩ/DC500V AC1500V/1min 耐电压 Withstanding voltage AC1500V/1min 使用线径 Wire range -
机械性能 MECHANICAL	温度范围 Temp. range -40°C~+150°C 瞬时温度 Max. soldering +250°C, 5sec 扭矩 Torque 0.2N.m 1.7lb.in 剥线长度 Strip length 6-7mm	温度范围 Temp. range -40°C~+105°C 瞬时温度 Max. soldering +250°C, 5sec 扭矩 Torque - 剥线长度 Strip length -	温度范围 Temp. range -40°C~+105°C 瞬时温度 Max. soldering +250°C, 5sec 扭矩 Torque - 剥线长度 Strip length -

产品照片 PRODUCT PHOTO			
	Pitch:3.50/3.81mm	Pitch:3.50/3.81mm	Pitch:3.50/3.81mm
产品图纸 PRODUCT PLAN			
产品型号 MODEL	<b>KF12EKA</b>	<b>KF12EKAM</b>	<b>KF12EKB</b>
材质&电镀 MATERIAL	M2.0, 钢, 镀锌 Steel, Zinc Plated 螺丝 Screw 触点 Contact 磷青铜 Phosphor Bronze 焊针 Pin header 塑件 Housing PA66, UL94V-0	M2.0, 钢, 镀锌 Steel, Zinc Plated 螺丝 Screw 触点 Contact 磷青铜 Phosphor bronze 焊针 Pin header 塑件 Housing PA66, UL94V-0	M2.0, 钢, 镀锌 Steel, Zinc Plated 螺丝 Screw 触点 Contact 磷青铜 Phosphor bronze 焊针 Pin header 塑件 Housing PA66, UL94V-0
电气性能 ELECTRICAL	<b>UL</b> <b>IEC</b> 额定电压 Rated voltage 300V 250V 额定电流 Rated current 8A 7A 接触电阻 Contact resistance 20mΩ 绝缘电阻 Insulation resistance 500MΩ/DC500V AC1500V/1min 耐电压 Withstanding voltage AC1500V/1min 使用线径 Wire range 28-16AWG 0.5-1.5mm <sup>2</sup>	<b>UL</b> <b>IEC</b> 额定电压 Rated voltage 300V 250V 额定电流 Rated current 8A 7A 接触电阻 Contact resistance 20mΩ 绝缘电阻 Insulation resistance 500MΩ/DC500V AC1500V/1min 耐电压 Withstanding voltage AC1500V/1min 使用线径 Wire range 28-16AWG 0.5-1.5mm <sup>2</sup>	<b>UL</b> <b>IEC</b> 额定电压 Rated voltage 300V 250V 额定电流 Rated current 8A 7A 接触电阻 Contact resistance 20mΩ 绝缘电阻 Insulation resistance 500MΩ/DC500V AC1500V/1min 耐电压 Withstanding voltage AC1500V/1min 使用线径 Wire range 28-16AWG 0.5-1.5mm <sup>2</sup>
机械性能 MECHANICAL	温度范围 Temp. range -40°C~+105°C 瞬时温度 Max. soldering +250°C, 5sec 扭矩 Torque 0.2N.m 1.7lb.in 剥线长度 Strip length 6-7mm	温度范围 Temp. range -40°C~+105°C 瞬时温度 Max. soldering +250°C, 5sec 扭矩 Torque 0.2N.m 1.7lb.in 剥线长度 Strip length 6-7mm	温度范围 Temp. range -40°C~+105°C 瞬时温度 Max. soldering +250°C, 5sec 扭矩 Torque 0.2N.m 1.7lb.in 剥线长度 Strip length 6-7mm

产品照片 PRODUCT PHOTO			
	Pitch:3.50/3.81mm	Pitch:3.50/3.81mm	Pitch:3.50/3.81mm
产品图纸 PRODUCT PLAN			
产品型号 MODEL	<b>KF12EKBM</b>	<b>KF12EKD</b>	<b>KF12EKDM</b>
材质&电镀 MATERIAL	M2.0, 钢, 镀锌 Steel, Zinc Plated 螺丝 Screw 触点 Contact 磷青铜 Phosphor bronze 焊针 Pin header 塑件 Housing PA66, UL94V-0	磷青铜 Phosphor bronze PA66, UL94V-0	磷青铜 Phosphor bronze PA66, UL94V-0
电气性能 ELECTRICAL	<b>UL</b> <b>IEC</b> 额定电压 Rated voltage 300V 250V 额定电流 Rated current 8A 7A 接触电阻 Contact resistance 20mΩ 绝缘电阻 Insulation resistance 500MΩ/DC500V AC1500V/1min 耐电压 Withstanding voltage AC1500V/1min 使用线径 Wire range 28-16AWG 0.5-1.5mm <sup>2</sup>	<b>UL</b> <b>IEC</b> 额定电压 Rated voltage 300V 250V 额定电流 Rated current 10A 7A 接触电阻 Contact resistance 20mΩ 绝缘电阻 Insulation resistance 500MΩ/DC500V AC1500V/1min 耐电压 Withstanding voltage AC1500V/1min 使用线径 Wire range 24-16AWG 0.5-1.5mm <sup>2</sup>	<b>UL</b> <b>IEC</b> 额定电压 Rated voltage 300V 250V 额定电流 Rated current 10A 7A 接触电阻 Contact resistance 20mΩ 绝缘电阻 Insulation resistance 500MΩ/DC500V AC1500V/1min 耐电压 Withstanding voltage AC1500V/1min 使用线径 Wire range 24-16AWG 0.5-1.5mm <sup>2</sup>
机械性能 MECHANICAL	温度范围 Temp. range -40°C~+105°C 瞬时温度 Max. soldering +250°C, 5sec 扭矩 Torque 0.2N.m 1.7lb.in 剥线长度 Strip length 6-7mm	温度范围 Temp. range -40°C~+105°C 瞬时温度 Max. soldering +250°C, 5sec 扭矩 Torque - 剥线长度 Strip length 10mm	温度范围 Temp. range -40°C~+105°C 瞬时温度 Max. soldering +250°C, 5sec 扭矩 Torque - 剥线长度 Strip length 10mm



插座式端子台  
PLUGGABLE TERMINAL BLOCKS



ISO9001 ISO14001 OHSAS18001 CB RoHS REACH



产品照片 PRODUCT PHOTO			
	Pitch:3.50/3.81mm	Pitch:3.50/3.81mm	Pitch:5.08mm
产品图纸 PRODUCT PLAN			
	N=Number of contacts	N=Number of contacts	N=Number of contacts
产品型号 MODEL	<b>KF12EFV</b>	<b>KF12EFR</b>	<b>KF12EFV</b>
材质&电镀 MATERIAL	磷青铜, 镀锡 Phosphor bronze, Tin plated PA66, UL94V-0	磷青铜, 镀锡 Phosphor bronze, Tin plated PA66, UL94V-0	磷青铜, 镀锡 Phosphor bronze, Tin plated PA66, UL94V-0
电气性能 ELECTRICAL	<b>UL</b> <b>IEC</b> Rated voltage 300V 250V Rated current 8A 7A 接触电阻 20mΩ 绝缘电阻 500MΩ/DC500V AC1500V/1min	<b>UL</b> <b>IEC</b> Rated voltage 300V 250V Rated current 8A 7A 接触电阻 20mΩ 绝缘电阻 500MΩ/DC500V AC1500V/1min	<b>UL</b> <b>IEC</b> Rated voltage 300V 320V Rated current 8A 7A 接触电阻 20mΩ 绝缘电阻 500MΩ/DC500V AC1500V/1min
机械性能 MECHANICAL	温度范围 -40℃~+105℃ 瞬时温度 +250℃, 5sec	温度范围 -40℃~+105℃ 瞬时温度 +250℃, 5sec	温度范围 -40℃~+105℃ 瞬时温度 +250℃, 5sec

产品照片 PRODUCT PHOTO			
	Pitch:5.08mm	Pitch:3.50/3.81mm	Pitch:3.50/3.81mm
产品图纸 PRODUCT PLAN			
	N=Number of contacts	N=Number of contacts	N=Number of contacts
产品型号 MODEL	<b>KF12EFR</b>	<b>KF1025V</b>	<b>KF1025VM</b>
材质&电镀 MATERIAL	磷青铜, 镀锡 Phosphor bronze, Tin plated PA66, UL94V-0	黄铜, 镀锡 Brass, Tin plated PA66, UL94V-0	黄铜, 镀锡 Brass, Tin plated PA66, UL94V-0
电气性能 ELECTRICAL	<b>UL</b> <b>IEC</b> Rated voltage 300V 320V Rated current 8A 7A 接触电阻 20mΩ 绝缘电阻 500MΩ/DC500V AC1500V/1min	<b>UL</b> <b>IEC</b> Rated voltage 300V 250V Rated current 8A 7A 接触电阻 20mΩ 绝缘电阻 500MΩ/DC500V AC1500V/1min	<b>UL</b> <b>IEC</b> Rated voltage 300V 250V Rated current 8A 7A 接触电阻 20mΩ 绝缘电阻 500MΩ/DC500V AC1500V/1min
机械性能 MECHANICAL	温度范围 -40℃~+105℃ 瞬时温度 +250℃, 5sec	温度范围 -40℃~+105℃ 瞬时温度 +250℃, 5sec	温度范围 -40℃~+105℃ 瞬时温度 +250℃, 5sec

产品照片 PRODUCT PHOTO			
	Pitch:3.50/3.81mm	Pitch:3.50/3.81mm	Pitch:3.50/3.81mm
产品图纸 PRODUCT PLAN			
	N=Number of contacts	N=Number of contacts	N=Number of contacts
产品型号 MODEL	<b>KF1025R</b>	<b>KF1025RM</b>	<b>KF12ETR</b>
材质&电镀 MATERIAL	黄铜, 镀锡 Brass, Tin plated PA66, UL94V-0	黄铜, 镀锡 Brass, Tin plated PA66, UL94V-0	黄铜, 镀锡 Brass, Tin plated PA66, UL94V-0
电气性能 ELECTRICAL	<b>UL</b> <b>IEC</b> Rated voltage 300V 250V Rated current 8A 7A 接触电阻 20mΩ 绝缘电阻 500MΩ/DC500V AC1500V/1min	<b>UL</b> <b>IEC</b> Rated voltage 300V 250V Rated current 8A 7A 接触电阻 20mΩ 绝缘电阻 500MΩ/DC500V AC1500V/1min	<b>UL</b> <b>IEC</b> Rated voltage 300V 250V Rated current 8A 7A 接触电阻 20mΩ 绝缘电阻 500MΩ/DC500V AC1500V/1min
机械性能 MECHANICAL	温度范围 -40℃~+105℃ 瞬时温度 +250℃, 5sec	温度范围 -40℃~+105℃ 瞬时温度 +250℃, 5sec	温度范围 -40℃~+105℃ 瞬时温度 +250℃, 5sec

产品照片 PRODUCT PHOTO			
	Pitch:3.50/3.81mm	Pitch:3.50/3.81mm	Pitch:3.50/3.81mm
产品图纸 PRODUCT PLAN			
	N=Number of contacts	N=Number of contacts	N=Number of contacts
产品型号 MODEL	<b>KF12ETRM</b>	<b>KF12ETV</b>	<b>KF12ETVM</b>
材质&电镀 MATERIAL	黄铜, 镀锡 Brass, Tin plated PA66, UL94V-0	黄铜, 镀锡 Brass, Tin plated PA66, UL94V-0	黄铜, 镀锡 Brass, Tin plated PA66, UL94V-0
电气性能 ELECTRICAL	<b>UL</b> <b>IEC</b> Rated voltage 300V 250V Rated current 8A 7A 接触电阻 20mΩ 绝缘电阻 500MΩ/DC500V AC1500V/1min	<b>UL</b> <b>IEC</b> Rated voltage 300V 250V Rated current 8A 7A 接触电阻 20mΩ 绝缘电阻 500MΩ/DC500V AC1500V/1min	<b>UL</b> <b>IEC</b> Rated voltage 300V 250V Rated current 8A 7A 接触电阻 20mΩ 绝缘电阻 500MΩ/DC500V AC1500V/1min
机械性能 MECHANICAL	温度范围 -40℃~+105℃ 瞬时温度 +250℃, 5sec	温度范围 -40℃~+105℃ 瞬时温度 +250℃, 5sec	温度范围 -40℃~+105℃ 瞬时温度 +250℃, 5sec



插座式端子台  
PLUGGABLE TERMINAL BLOCKS



ISO9001 ISO14001 OHSAS18001 CB RoHS REACH



产品照片 PRODUCT PHOTO			
	Pitch:3.50/3.81mm	Pitch:3.50/3.81mm	Pitch:3.50mm
产品图纸 PRODUCT PLAN			
	N=Number of contacts	N=Number of contacts	N=Number of contacts
产品型号 MODEL	<b>KF12EKN</b>	<b>KF12EKNM</b>	<b>KF12EKN-R</b>
材质&电镀 MATERIAL	磷青铜 Phosphor Bronze	磷青铜 Phosphor Bronze	黄铜, 镀锡 Brass, Tin plated
螺丝 Screw	-	-	-
触点 Contact	-	-	-
焊针 Pin header	-	-	-
塑件 Housing	PA66, UL94V-0	PA66, UL94V-0	PA66, UL94V-0
电气性能 ELECTRICAL	<b>UL</b> <b>IEC</b>	<b>UL</b> <b>IEC</b>	<b>UL</b> <b>IEC</b>
额定电压 Rated voltage	300V 250V	300V 250V	300V 250V
额定电流 Rated current	8A 7A	8A 7A	8A 7A
接触电阻 Contact resistance	20mΩ	20mΩ	20mΩ
绝缘电阻 Insulation resistance	500MΩ/DC500V	500MΩ/DC500V	500MΩ/DC500V
耐压 Withstanding voltage	AC1500V/1min	AC1500V/1min	AC1500V/1min
使用线径 Wire range	24-16AWG 0.5-1.5mm <sup>2</sup>	28-16AWG 0.5-1.5mm <sup>2</sup>	-
机械性能 MECHANICAL			
温度范围 Temp. range	-40°C~+105°C	-40°C~+105°C	-40°C~+105°C
瞬时温度 Max. soldering	+250°C, 5sec	+250°C, 5sec	+250°C, 5sec
扭矩 Torque	-	-	-
剥线长度 Strip length	8-9mm	8-9mm	-

产品照片 PRODUCT PHOTO			
	Pitch:3.50mm	Pitch:3.50mm	Pitch:3.50mm
产品图纸 PRODUCT PLAN			
	N=Number of contacts	N=Number of contacts	N=Number of contacts
产品型号 MODEL	<b>KF12EKN-RM</b>	<b>KF12EKN-V</b>	<b>KF12EKN-VM</b>
材质&电镀 MATERIAL	黄铜, 镀锡 Brass, Tin plated	黄铜, 镀锡 Brass, Tin plated	黄铜, 镀锡 Brass, Tin plated
螺丝 Screw	-	-	-
触点 Contact	-	-	-
焊针 Pin header	-	-	-
塑件 Housing	PA66, UL94V-0	PA66, UL94V-0	PA66, UL94V-0
电气性能 ELECTRICAL	<b>UL</b> <b>IEC</b>	<b>UL</b> <b>IEC</b>	<b>UL</b> <b>IEC</b>
额定电压 Rated voltage	300V 250V	300V 250V	300V 250V
额定电流 Rated current	8A 7A	8A 7A	8A 7A
接触电阻 Contact resistance	20mΩ	20mΩ	20mΩ
绝缘电阻 Insulation resistance	500MΩ/DC500V	500MΩ/DC500V	500MΩ/DC500V
耐压 Withstanding voltage	AC2000V/1min	AC2000V/1min	AC2000V/1min
使用线径 Wire range	-	-	-
机械性能 MECHANICAL			
温度范围 Temp. range	-40°C~+105°C	-40°C~+105°C	-40°C~+105°C
瞬时温度 Max. soldering	+250°C, 5sec	+250°C, 5sec	+250°C, 5sec
扭矩 Torque	-	-	-
剥线长度 Strip length	-	-	-

产品照片 PRODUCT PHOTO			
	Pitch:5.00/5.08mm	Pitch:5.00/5.08mm	Pitch:5.00/5.08mm
产品图纸 PRODUCT PLAN			
	N=Number of contacts	N=Number of contacts	N=Number of contacts
产品型号 MODEL	<b>KF2EDG-Y</b>	<b>KF2EDGV-Y</b>	<b>KF2EDGR-Y</b>
材质&电镀 MATERIAL	M2.0, 钢, 镀锌 Steel, Zinc Plated 磷青铜 Phosphor Bronze	黄铜, 镀锡 Brass, Tin plated	黄铜, 镀锡 Brass, Tin plated
螺丝 Screw	-	-	-
触点 Contact	-	-	-
焊针 Pin header	-	-	-
塑件 Housing	PA66, UL94V-0	PA66, UL94V-0	PA66, UL94V-0
电气性能 ELECTRICAL	<b>UL</b> <b>IEC</b>	<b>UL</b> <b>IEC</b>	<b>UL</b> <b>IEC</b>
额定电压 Rated voltage	300V 320V	300V 320V	300V 320V
额定电流 Rated current	8A 7A	8A 7A	8A 7A
接触电阻 Contact resistance	20mΩ	20mΩ	20mΩ
绝缘电阻 Insulation resistance	500MΩ/DC500V	500MΩ/DC500V	500MΩ/DC500V
耐压 Withstanding voltage	AC2000V/1min	AC2000V/1min	AC2000V/1min
使用线径 Wire range	28-16AWG 0.5-1.5mm <sup>2</sup>	-	-
机械性能 MECHANICAL			
温度范围 Temp. range	-40°C~+105°C	-40°C~+105°C	-40°C~+105°C
瞬时温度 Max. soldering	+250°C, 5sec	+250°C, 5sec	+250°C, 5sec
扭矩 Torque	0.2N.m 1.7Lb.in	-	-
剥线长度 Strip length	5-6mm	-	-

产品照片 PRODUCT PHOTO			
	Pitch:5.00/5.08mm	Pitch:5.00/5.08mm	Pitch:5.00/5.08mm
产品图纸 PRODUCT PLAN			
	N=Number of contacts	N=Number of contacts	N=Number of contacts
产品型号 MODEL	<b>KF2EDGM-Y</b>	<b>KF2EDGVM-Y</b>	<b>KF2EDGRM-Y</b>
材质&电镀 MATERIAL	M2.0, 钢, 镀锌 Steel, Zinc Plated 磷青铜 Phosphor Bronze	黄铜, 镀锡 Brass, Tin plated	黄铜, 镀锡 Brass, Tin plated
螺丝 Screw	-	-	-
触点 Contact	-	-	-
焊针 Pin header	-	-	-
塑件 Housing	PA66, UL94V-0	PA66, UL94V-0	PA66, UL94V-0
电气性能 ELECTRICAL	<b>UL</b> <b>IEC</b>	<b>UL</b> <b>IEC</b>	<b>UL</b> <b>IEC</b>
额定电压 Rated voltage	300V 320V	300V 320V	300V 320V
额定电流 Rated current	8A 7A	8A 7A	8A 7A
接触电阻 Contact resistance	20mΩ	20mΩ	20mΩ
绝缘电阻 Insulation resistance	500MΩ/DC500V	500MΩ/DC500V	500MΩ/DC500V
耐压 Withstanding voltage	AC2000V/1min	AC2000V/1min	AC2000V/1min
使用线径 Wire range	28-16AWG 0.5-1.5mm <sup>2</sup>	-	-
机械性能 MECHANICAL			
温度范围 Temp. range	-40°C~+105°C	-40°C~+105°C	-40°C~+105°C
瞬时温度 Max. soldering	+250°C, 5sec	+250°C, 5sec	+250°C, 5sec
扭矩 Torque	0.2N.m 1.7Lb.in	-	-
剥线长度 Strip length	5-6mm	-	-



插座式端子台  
PLUGGABLE TERMINAL BLOCKS



ISO9001 ISO14001 OHSAS18001 CB RoHS REACH



产品照片 PRODUCT PHOTO			
	Pitch:5.00/5.08mm	Pitch:5.00/5.08mm	Pitch:5.00/5.08mm
产品图纸 PRODUCT PLAN			
	N=Number of contacts	N=Number of contacts	N=Number of contacts
产品型号 MODEL	<b>KF2EDG-X</b>	<b>KF2EDGV-X</b>	<b>KF2EDGR-X</b>
材质&电镀 MATERIAL	M3.0, 钢, 镀锌 Steel, Zinc Plated 磷青铜 Phosphor bronze	黄铜, 镀锡 Brass, Tin plated	黄铜, 镀锡 Brass, Tin plated
螺丝 Screw	-	-	-
触点 Contact	-	-	-
焊针 Pin header	-	-	-
塑件 Housing	PA66, UL94V-0	PA66, UL94V-0	PA66, UL94V-0
电气性能 ELECTRICAL	<b>UL</b> <b>IEC</b>	<b>UL</b> <b>IEC</b>	<b>UL</b> <b>IEC</b>
额定电压 Rated voltage	300V	300V	300V
额定电流 Rated current	15A	15A	15A
接触电阻 Contact resistance	20mΩ	20mΩ	20mΩ
绝缘电阻 Insulation resistance	500MΩ/DC500V	500MΩ/DC500V	500MΩ/DC500V
耐压 Withstanding voltage	AC2000V/1min	AC2000V/1min	AC2000V/1min
使用线径 Wire range	28-12AWG 2.5mm <sup>2</sup>	-	-
机械性能 MECHANICAL			
温度范围 Temp. range	-40°C~+105°C	-40°C~+105°C	-40°C~+105°C
瞬时温度 Max. soldering	+250°C, 5sec	+250°C, 5sec	+250°C, 5sec
扭矩 Torque	0.5N.m 4.43lb.in	-	-
剥线长度 Strip length	7-8mm	-	-

产品照片 PRODUCT PHOTO			
	Pitch:5.00/5.08mm	Pitch:5.00/5.08mm	Pitch:5.00/5.08mm
产品图纸 PRODUCT PLAN			
	N=Number of contacts	N=Number of contacts	N=Number of contacts
产品型号 MODEL	<b>KF2EDGCV-X</b>	<b>KF2EDGCR-X</b>	<b>KF222</b>
材质&电镀 MATERIAL	M2.5, 钢, 镀锌 Steel, Zinc Plated 磷青铜 Phosphor bronze	M2.5, 钢, 镀锌 Steel, Zinc Plated 磷青铜 Phosphor bronze	M2.5, 钢, 镀锌 Steel, Zinc Plated 磷青铜 Phosphor bronze
螺丝 Screw	-	-	-
触点 Contact	-	-	-
焊针 Pin header	黄铜, 镀锡 Brass, Tin plated	黄铜, 镀锡 Brass, Tin plated	黄铜, 镀锡 Brass, Tin plated
塑件 Housing	PA66, UL94V-0	PA66, UL94V-0	PA66, UL94V-0
电气性能 ELECTRICAL	<b>UL</b> <b>IEC</b>	<b>UL</b> <b>IEC</b>	<b>UL</b> <b>IEC</b>
额定电压 Rated voltage	300V	300V	300V
额定电流 Rated current	15A	15A	15A
接触电阻 Contact resistance	20mΩ	20mΩ	20mΩ
绝缘电阻 Insulation resistance	500MΩ/DC500V	500MΩ/DC500V	500MΩ/DC500V
耐压 Withstanding voltage	AC2000V/1min	AC2000V/1min	AC2000V/1min
使用线径 Wire range	28-12AWG 2.5mm <sup>2</sup>	-	-
机械性能 MECHANICAL			
温度范围 Temp. range	-40°C~+105°C	-40°C~+105°C	-40°C~+150°C
瞬时温度 Max. soldering	+250°C, 5sec	+250°C, 5sec	+250°C, 5sec
扭矩 Torque	0.4N.m 3.5lb.in	-	0.4N.m 3.5lb.in
剥线长度 Strip length	7-8mm	-	7-8mm

产品照片 PRODUCT PHOTO			
	Pitch:5.00/5.08mm	Pitch:5.00/5.08mm	Pitch:5.00/5.08mm
产品图纸 PRODUCT PLAN			
	N=Number of contacts	N=Number of contacts	N=Number of contacts
产品型号 MODEL	<b>KF222M</b>	<b>KF2EDGVM-X</b>	<b>KF2EDGRM-X</b>
材质&电镀 MATERIAL	M2.5, 钢, 镀锌 Steel, Zinc Plated 磷青铜 Phosphor bronze	M2.5, 钢, 镀锌 Steel, Zinc Plated 磷青铜 Phosphor bronze	M2.5, 钢, 镀锌 Steel, Zinc Plated 磷青铜 Phosphor bronze
螺丝 Screw	-	-	-
触点 Contact	-	-	-
焊针 Pin header	-	黄铜, 镀锡 Brass, Tin plated	黄铜, 镀锡 Brass, Tin plated
塑件 Housing	PA66, UL94V-0	PA66, UL94V-0	PA66, UL94V-0
电气性能 ELECTRICAL	<b>UL</b> <b>IEC</b>	<b>UL</b> <b>IEC</b>	<b>UL</b> <b>IEC</b>
额定电压 Rated voltage	300V	300V	300V
额定电流 Rated current	15A	15A	15A
接触电阻 Contact resistance	20mΩ	20mΩ	20mΩ
绝缘电阻 Insulation resistance	500MΩ/DC500V	500MΩ/DC500V	500MΩ/DC500V
耐压 Withstanding voltage	AC2000V/1min	AC2000V/1min	AC2000V/1min
使用线径 Wire range	28-12AWG 2.5mm <sup>2</sup>	-	-
机械性能 MECHANICAL			
温度范围 Temp. range	-40°C~+150°C	-40°C~+105°C	-40°C~+105°C
瞬时温度 Max. soldering	+250°C, 5sec	+250°C, 5sec	+250°C, 5sec
扭矩 Torque	0.4N.m 3.5lb.in	-	-
剥线长度 Strip length	7-8mm	-	-

产品照片 PRODUCT PHOTO			
	Pitch:5.00/5.08mm	Pitch:5.00/5.08mm	Pitch:5.00/5.08mm
产品图纸 PRODUCT PLAN			
	N=Number of contacts	N=Number of contacts	N=Number of contacts
产品型号 MODEL	<b>KF2EDGKA</b>	<b>KF2EDGKAM</b>	<b>KF2EDGKB</b>
材质&电镀 MATERIAL	M2.5, 钢, 镀锌 Steel, Zinc Plated 磷青铜 Phosphor bronze	M2.5, 钢, 镀锌 Steel, Zinc Plated 磷青铜 Phosphor bronze	M2.5, 钢, 镀锌 Steel, Zinc Plated 磷青铜 Phosphor bronze
螺丝 Screw	-	-	-
触点 Contact	-	-	-
焊针 Pin header	-	-	-
塑件 Housing	PA66, UL94V-0	PA66, UL94V-0	PA66, UL94V-0
电气性能 ELECTRICAL	<b>UL</b> <b>IEC</b>	<b>UL</b> <b>IEC</b>	<b>UL</b> <b>IEC</b>
额定电压 Rated voltage	300V	300V	300V
额定电流 Rated current	15A	15A	15A
接触电阻 Contact resistance	20mΩ	20mΩ	20mΩ
绝缘电阻 Insulation resistance	500MΩ/DC500V	500MΩ/DC500V	500MΩ/DC500V
耐压 Withstanding voltage	AC2000V/1min	AC2000V/1min	AC2000V/1min
使用线径 Wire range	28-12AWG 2.5mm <sup>2</sup>	-	-
机械性能 MECHANICAL			
温度范围 Temp. range	-40°C~+105°C	-40°C~+105°C	-40°C~+105°C
瞬时温度 Max. soldering	+250°C, 5sec	+250°C, 5sec	+250°C, 5sec
扭矩 Torque	0.4N.m 3.5lb.in	-	-
剥线长度 Strip length	7-8mm	-	-



插座式端子台  
PLUGGABLE TERMINAL BLOCKS



ISO9001 ISO14001 OHSAS18001 CB RoHS REACH



产品照片 PRODUCT PHOTO			
	Pitch:5.00/5.08mm	Pitch:5.00/5.08mm	Pitch:5.00/5.08mm
产品图纸 PRODUCT PLAN			
	N=Number of contacts	N=Number of contacts	N=Number of contacts
产品型号 MODEL	<b>KF2EDGKBM</b>	<b>KF2EDGKD</b>	<b>KF2EDGKDM</b>
材质&电镀 MATERIAL	M2.5, 钢, 镀锌 Steel, Zinc Plated 螺丝 Screw 触点 Contact 磷青铜 Phosphor bronze 簧片 Reed 弹片 Housing PA66, UL94V-0	磷青铜 Phosphor bronze 不锈钢 Stainless steel PA66, UL94V-0	磷青铜 Phosphor bronze 不锈钢 Stainless steel PA66, UL94V-0
电气性能 ELECTRICAL	<b>UL</b> <b>IEC</b> 额定电压 Rated voltage 300V 320V 额定电流 Rated current 15A 10A 接触电阻 Contact resistance 20mΩ 绝缘电阻 Insulation resistance 500MΩ/DC500V 耐压 Withstanding voltage AC2000V/1min 使用线径 Wire range 28-12AWG 2.5mm <sup>2</sup>	<b>UL</b> <b>IEC</b> 额定电压 Rated voltage 300V 320V 额定电流 Rated current 15A 20A 接触电阻 Contact resistance 20mΩ 绝缘电阻 Insulation resistance 500MΩ/DC500V 耐压 Withstanding voltage AC2000V/1min 使用线径 Wire range 28-14AWG 2.5mm <sup>2</sup>	<b>UL</b> <b>IEC</b> 额定电压 Rated voltage 300V 320V 额定电流 Rated current 15A 20A 接触电阻 Contact resistance 20mΩ 绝缘电阻 Insulation resistance 500MΩ/DC500V 耐压 Withstanding voltage AC2000V/1min 使用线径 Wire range 28-14AWG 2.5mm <sup>2</sup>
机械性能 MECHANICAL	温度范围 Temp. range -40°C~+105°C 瞬时温度 Max. soldering +250°C, 5sec 扭矩 Torque 0.4Nm 3.5Lb.in 剥线长度 Strip length 7-8mm	温度范围 Temp. range -40°C~+105°C 瞬时温度 Max. soldering +250°C, 5sec 扭矩 Torque - 剥线长度 Strip length 10-11mm	温度范围 Temp. range -40°C~+105°C 瞬时温度 Max. soldering +250°C, 5sec 扭矩 Torque - 剥线长度 Strip length 10-11mm

产品照片 PRODUCT PHOTO			
	Pitch:7.5/7.62mm	Pitch:7.5/7.62mm	Pitch:5.08mm
产品图纸 PRODUCT PLAN			
	N=Number of contacts	N=Number of contacts	N=Number of contacts
产品型号 MODEL	<b>KF2EKD</b>	<b>KF2EKDM</b>	<b>KF1024</b>
材质&电镀 MATERIAL	簧片 Reed 夹子 Clip 磷青铜 Phosphor bronze 簧片 Reed 弹片 Housing PA66, UL94V-0	簧片 Reed 夹子 Clip 磷青铜 Phosphor bronze 簧片 Reed 弹片 Housing PA66, UL94V-0	簧片 Reed 夹子 Clip 磷青铜 Phosphor bronze 簧片 Reed 弹片 Housing PA66, UL94V-0
电气性能 ELECTRICAL	<b>UL</b> <b>IEC</b> 额定电压 Rated voltage 300V 400V 额定电流 Rated current 15A 20A 接触电阻 Contact resistance 20mΩ 绝缘电阻 Insulation resistance 500MΩ/DC500V 耐压 Withstanding voltage AC2000V/1min 使用线径 Wire range 26-12AWG 2.5mm <sup>2</sup>	<b>UL</b> <b>IEC</b> 额定电压 Rated voltage 300V 400V 额定电流 Rated current 15A 20A 接触电阻 Contact resistance 20mΩ 绝缘电阻 Insulation resistance 500MΩ/DC500V 耐压 Withstanding voltage AC2000V/1min 使用线径 Wire range 26-12AWG 2.5mm <sup>2</sup>	<b>UL</b> <b>IEC</b> 额定电压 Rated voltage 300V 320V 额定电流 Rated current 15A 20A 接触电阻 Contact resistance 20mΩ 绝缘电阻 Insulation resistance 500MΩ/DC500V 耐压 Withstanding voltage AC2000V/1min 使用线径 Wire range 24-12AWG 2.5mm <sup>2</sup>
机械性能 MECHANICAL	温度范围 Temp. range -40°C~+105°C 瞬时温度 Max. soldering +250°C, 5sec 扭矩 Torque - 剥线长度 Strip length 10-11mm	温度范围 Temp. range -40°C~+105°C 瞬时温度 Max. soldering +250°C, 5sec 扭矩 Torque - 剥线长度 Strip length 10-11mm	温度范围 Temp. range -40°C~+105°C 瞬时温度 Max. soldering +250°C, 5sec 扭矩 Torque - 剥线长度 Strip length -

产品照片 PRODUCT PHOTO			
	Pitch:3.96mm	Pitch:3.96mm	Pitch:3.96mm
产品图纸 PRODUCT PLAN			
	N=Number of contacts	N=Number of contacts	N=Number of contacts
产品型号 MODEL	<b>HT396</b>	<b>HT396V</b>	<b>HT396R</b>
材质&电镀 MATERIAL	M2.0, 钢, 镀锌 Steel, Zinc Plated 螺丝 Screw 触点 Contact 磷青铜 Phosphor bronze 簧片 Reed 弹片 Housing PA66, UL94V-0	簧片 Reed 弹片 Housing PA66, UL94V-0	簧片 Reed 弹片 Housing PA66, UL94V-0
电气性能 ELECTRICAL	<b>UL</b> <b>IEC</b> 额定电压 Rated voltage 300V 250V 额定电流 Rated current 10A 15A 接触电阻 Contact resistance 20mΩ 绝缘电阻 Insulation resistance 500MΩ/DC500V 耐压 Withstanding voltage AC1500V/1min 使用线径 Wire range 28-14AWG 1.5mm <sup>2</sup>	<b>UL</b> <b>IEC</b> 额定电压 Rated voltage 300V 250V 额定电流 Rated current 10A 15A 接触电阻 Contact resistance 20mΩ 绝缘电阻 Insulation resistance 500MΩ/DC500V 耐压 Withstanding voltage AC1500V/1min 使用线径 Wire range -	<b>UL</b> <b>IEC</b> 额定电压 Rated voltage 300V 250V 额定电流 Rated current 10A 15A 接触电阻 Contact resistance 20mΩ 绝缘电阻 Insulation resistance 500MΩ/DC500V 耐压 Withstanding voltage AC1500V/1min 使用线径 Wire range -
机械性能 MECHANICAL	温度范围 Temp. range -40°C~+105°C 瞬时温度 Max. soldering +250°C, 5sec 扭矩 Torque 0.2Nm 1.7Lb.in 剥线长度 Strip length 7-8mm	温度范围 Temp. range -40°C~+105°C 瞬时温度 Max. soldering +250°C, 5sec 扭矩 Torque - 剥线长度 Strip length -	温度范围 Temp. range -40°C~+105°C 瞬时温度 Max. soldering +250°C, 5sec 扭矩 Torque - 剥线长度 Strip length -

产品照片 PRODUCT PHOTO			
	Pitch:5.08mm	Pitch:5.08mm	Pitch:5.08mm
产品图纸 PRODUCT PLAN			
	N=Number of contacts	N=Number of contacts	N=Number of contacts
产品型号 MODEL	<b>HT508</b>	<b>HT508V</b>	<b>HT508R</b>
材质&电镀 MATERIAL	M2.5, 钢, 镀锌 Steel, Zinc Plated 螺丝 Screw 触点 Contact 磷青铜 Phosphor bronze 簧片 Reed 弹片 Housing PA66, UL94V-0	簧片 Reed 弹片 Housing PA66, UL94V-0	簧片 Reed 弹片 Housing PA66, UL94V-0
电气性能 ELECTRICAL	<b>UL</b> <b>IEC</b> 额定电压 Rated voltage 300V 320V 额定电流 Rated current 15A 20A 接触电阻 Contact resistance 20mΩ 绝缘电阻 Insulation resistance 500MΩ/DC500V 耐压 Withstanding voltage AC2000V/1min 使用线径 Wire range 24-12AWG 2.5mm <sup>2</sup>	<b>UL</b> <b>IEC</b> 额定电压 Rated voltage 300V 320V 额定电流 Rated current 15A 20A 接触电阻 Contact resistance 20mΩ 绝缘电阻 Insulation resistance 500MΩ/DC500V 耐压 Withstanding voltage AC2000V/1min 使用线径 Wire range -	<b>UL</b> <b>IEC</b> 额定电压 Rated voltage 300V 320V 额定电流 Rated current 15A 20A 接触电阻 Contact resistance 20mΩ 绝缘电阻 Insulation resistance 500MΩ/DC500V 耐压 Withstanding voltage AC2000V/1min 使用线径 Wire range -
机械性能 MECHANICAL	温度范围 Temp. range -40°C~+105°C 瞬时温度 Max. soldering +250°C, 5sec 扭矩 Torque 0.4Nm 3.5Lb.in 剥线长度 Strip length 7-8mm	温度范围 Temp. range -40°C~+105°C 瞬时温度 Max. soldering +250°C, 5sec 扭矩 Torque - 剥线长度 Strip length -	温度范围 Temp. range -40°C~+105°C 瞬时温度 Max. soldering +250°C, 5sec 扭矩 Torque - 剥线长度 Strip length -



插座式端子台  
PLUGGABLE TERMINAL BLOCKS



ISO9001 ISO14001 OHSAS18001 CB RoHS REACH



产品照片 PRODUCT PHOTO			
	Pitch:5.00/5.08/7.50/7.62mm	Pitch:5.00/5.08/7.50/7.62mm	Pitch:5.00/5.08mm
产品图纸 PRODUCT PLAN			
	N=Number of contacts	N=Number of contacts	N=Number of contacts
产品型号 MODEL	<b>KF203</b>	<b>KF203M</b>	<b>KF1026V</b>
材质&电镀 MATERIAL	M2.5, 钢, 镀锌 Steel, Zinc Plated 磷青铜 Phosphor bronze	M2.5, 钢, 镀锌 Steel, Zinc Plated 磷青铜 Phosphor bronze	黄铜, 镀锡 Brass, Tin plated
螺丝 Screw	-	-	-
触点 Contact	-	-	-
焊针 Pin header	-	-	-
塑件 Housing	PA66, UL94V-0	PA66, UL94V-0	PA66, UL94V-0
电气性能 ELECTRICAL	<b>UL</b> <b>IEC</b>	<b>UL</b> <b>IEC</b>	<b>UL</b> <b>IEC</b>
额定电压 Rated voltage	300V	300V	300V
额定电流 Rated current	15A	15A	15A
接触电阻 Contact resistance	20mΩ	20mΩ	20mΩ
绝缘电阻 Insulation resistance	500MΩ/DC500V	500MΩ/DC500V	500MΩ/DC500V
耐压 Withstanding voltage	AC2000V/1min	AC2000V/1min	AC2000V/1min
使用线径 Wire range	28-14AWG 2.5mm <sup>2</sup>	28-14AWG 2.5mm <sup>2</sup>	-
机械性能 MECHANICAL	<b>UL</b> <b>IEC</b>	<b>UL</b> <b>IEC</b>	<b>UL</b> <b>IEC</b>
温度范围 Temp. range	-40°C~+105°C	-40°C~+105°C	-40°C~+105°C
瞬时温度 Max. soldering	+250°C, 5sec	+250°C, 5sec	+250°C, 5sec
扭矩 Torque	0.4N.m 3.5Lb.in	0.4N.m 3.5Lb.in	-
剥线长度 Strip length	7-8mm	7-8mm	-

产品照片 PRODUCT PHOTO			
	Pitch:5.00/5.08mm	Pitch:5.00/5.08mm	Pitch:5.00/5.08mm
产品图纸 PRODUCT PLAN			
	N=Number of contacts	N=Number of contacts	N=Number of contacts
产品型号 MODEL	<b>KF1026VM</b>	<b>KF1026R</b>	<b>KF1026RM</b>
材质&电镀 MATERIAL	M2.0, 钢, 镀锌 Steel, Zinc Plated 磷青铜 Phosphor bronze	M2.0, 钢, 镀锌 Steel, Zinc Plated 磷青铜 Phosphor bronze, Ni plated	M2.0, 钢, 镀锌 Steel, Zinc Plated 磷青铜 Phosphor bronze, Ni plated
螺丝 Screw	-	-	-
触点 Contact	-	-	-
焊针 Pin header	黄铜, 镀锡 Brass, Tin plated	黄铜, 镀锡 Brass, Tin plated	黄铜, 镀锡 Brass, Tin plated
塑件 Housing	PA66, UL94V-0	PA66, UL94V-0	PA66, UL94V-0
电气性能 ELECTRICAL	<b>UL</b> <b>IEC</b>	<b>UL</b> <b>IEC</b>	<b>UL</b> <b>IEC</b>
额定电压 Rated voltage	300V	300V	300V
额定电流 Rated current	15A	15A	15A
接触电阻 Contact resistance	20mΩ	20mΩ	20mΩ
绝缘电阻 Insulation resistance	500MΩ/DC500V	500MΩ/DC500V	500MΩ/DC500V
耐压 Withstanding voltage	AC2000V/1min	AC2000V/1min	AC2000V/1min
使用线径 Wire range	-	-	-
机械性能 MECHANICAL	<b>UL</b> <b>IEC</b>	<b>UL</b> <b>IEC</b>	<b>UL</b> <b>IEC</b>
温度范围 Temp. range	-40°C~+105°C	-40°C~+105°C	-40°C~+105°C
瞬时温度 Max. soldering	+250°C, 5sec	+250°C, 5sec	+250°C, 5sec
扭矩 Torque	-	-	-
剥线长度 Strip length	-	-	-

产品照片 PRODUCT PHOTO			
	Pitch:5.00/5.08mm	Pitch:5.00/5.08mm	Pitch:5.00/5.08mm
产品图纸 PRODUCT PLAN			
	N=Number of contacts	N=Number of contacts	N=Number of contacts
产品型号 MODEL	<b>KF2EDGL</b>	<b>KF2EDGLC</b>	<b>KF2EDGLM</b>
材质&电镀 MATERIAL	M2.0, 钢, 镀锌 Steel, Zinc Plated 磷青铜 Phosphor bronze	M2.0, 钢, 镀锌 Steel, Zinc Plated 磷青铜 Phosphor bronze, Ni plated	M2.0, 钢, 镀锌 Steel, Zinc Plated 磷青铜 Phosphor bronze, Ni plated
螺丝 Screw	-	-	-
触点 Contact	-	-	-
焊针 Pin header	黄铜, 镀锡 Brass, Tin plated	黄铜, 镀锡 Brass, Tin plated	黄铜, 镀锡 Brass, Tin plated
塑件 Housing	PA66, UL94V-0	PA66, UL94V-0	PA66, UL94V-0
电气性能 ELECTRICAL	<b>UL</b> <b>IEC</b>	<b>UL</b> <b>IEC</b>	<b>UL</b> <b>IEC</b>
额定电压 Rated voltage	300V	300V	300V
额定电流 Rated current	15A	15A	15A
接触电阻 Contact resistance	20mΩ	20mΩ	20mΩ
绝缘电阻 Insulation resistance	500MΩ/DC500V	500MΩ/DC500V	500MΩ/DC500V
耐压 Withstanding voltage	AC2000V/1min	AC2000V/1min	AC2000V/1min
使用线径 Wire range	-	-	-
机械性能 MECHANICAL	<b>UL</b> <b>IEC</b>	<b>UL</b> <b>IEC</b>	<b>UL</b> <b>IEC</b>
温度范围 Temp. range	-40°C~+105°C	-40°C~+105°C	-40°C~+105°C
瞬时温度 Max. soldering	+250°C, 5sec	+250°C, 5sec	+250°C, 5sec
扭矩 Torque	-	-	-
剥线长度 Strip length	-	-	-

产品照片 PRODUCT PHOTO			
	Pitch:5.00/5.08mm	Pitch:3.5/3.81mm	Pitch:3.5/3.81mm
产品图纸 PRODUCT PLAN			
	N=Number of contacts	N=Number of contacts	N=Number of contacts
产品型号 MODEL	<b>KF2EDGP</b>	<b>KF12EKR</b>	<b>KF12EKRM</b>
材质&电镀 MATERIAL	M2.5, 钢, 镀锌 Steel, Zinc Plated 磷青铜 Phosphor bronze	M2.0, 钢, 镀锌 Steel, Zinc Plated 磷青铜 Phosphor bronze, Ni plated	M2.0, 钢, 镀锌 Steel, Zinc Plated 磷青铜 Phosphor bronze, Ni plated
螺丝 Screw	-	-	-
触点 Contact	-	-	-
夹子 Clip	-	-	-
焊针 Pin header	黄铜, 镀锡 Brass, Ni plated	黄铜, 镀锡 Brass, Ni plated	黄铜, 镀锡 Brass, Ni plated
塑件 Housing	PA66, UL94V-0	PA66, UL94V-0	PA66, UL94V-0
电气性能 ELECTRICAL	<b>UL</b> <b>IEC</b>	<b>UL</b> <b>IEC</b>	<b>UL</b> <b>IEC</b>
额定电压 Rated voltage	300V	300V	300V
额定电流 Rated current	15A	8A	8A
接触电阻 Contact resistance	20mΩ	20mΩ	20mΩ
绝缘电阻 Insulation resistance	500MΩ/DC500V	500MΩ/DC500V	500MΩ/DC500V
耐压 Withstanding voltage	AC2000V/1min	AC1500V/1min	AC1500V/1min
使用线径 Wire range	24-14AWG 2.5mm <sup>2</sup>	16-28AWG 0.5-1.5mm <sup>2</sup>	16-28AWG 0.5-1.5mm <sup>2</sup>
机械性能 MECHANICAL	<b>UL</b> <b>IEC</b>	<b>UL</b> <b>IEC</b>	<b>UL</b> <b>IEC</b>
温度范围 Temp. range	-40°C~+105°C	-40°C~+105°C	-40°C~+105°C
瞬时温度 Max. soldering	+250°C, 5sec	+250°C, 5sec	+250°C, 5sec
扭矩 Torque	0.4N.m 3.5Lb.in	0.2N.m 2.4kgf.cm	0.2N.m 2.4kgf.cm
剥线长度 Strip length	7-8mm	6-7mm	6-7mm



插座式端子台  
PLUGGABLE TERMINAL BLOCKS



ISO9001 ISO14001 OHSAS18001 CB RoHS REACH



产品照片 PRODUCT PHOTO			
	Pitch:5.00/5.08mm	Pitch:5.00/5.08mm	Pitch:7.50/7.62mm
产品图纸 PRODUCT PLAN			
	N=Number of contacts	N=Number of contacts	N=Number of contacts
产品型号 MODEL	<b>KF2EKR</b>	<b>KF2EKR</b>	<b>KF2EDG-X</b>
材质&电镀 MATERIAL	M3.0, 钢, 镀锌 Steel, Zinc Plated 磷青铜 Phosphor bronze	M3.0, 钢, 镀锌 Steel, Zinc Plated 磷青铜 Phosphor bronze	M2.5, 钢, 镀锌 Steel, Zinc Plated 磷青铜 Phosphor bronze
螺丝 Screw	-	-	-
触点 Contact	-	-	-
焊针 Pin header	-	-	-
塑件 Housing	PA66, UL94V-0	PA66, UL94V-0	PA66, UL94V-0
电气性能 ELECTRICAL	<b>UL</b> <b>IEC</b>	<b>UL</b> <b>IEC</b>	<b>UL</b> <b>IEC</b>
额定电压 Rated voltage	300V 320V	300V 320V	300V 400V
额定电流 Rated current	15A 20A	15A 20A	15A 20A
接触电阻 Contact resistance	20mΩ	20mΩ	20mΩ
绝缘电阻 Insulation resistance	500MΩ/DC500V	500MΩ/DC500V	500MΩ/DC500V
耐压 Withstanding voltage	AC2000V/1min	AC2000V/1min	AC2500V/1min
使用线径 Wire range	24-14AWG 2.5mm <sup>2</sup>	24-14AWG 2.5mm <sup>2</sup>	28-12AWG 2.5mm <sup>2</sup>
机械性能 MECHANICAL			
温度范围 Temp. range	-40℃~+105℃	-40℃~+105℃	-40℃~+105℃
瞬时温度 Max. soldering	+250℃, 5sec	+250℃, 5sec	+250℃, 5sec
扭矩 Torque	0.4N.m 3.5Lb.in	0.4N.m 3.5Lb.in	0.5N.m 4.4Lb.in
剥线长度 Strip length	7-8mm	7-8mm	7-8mm

产品照片 PRODUCT PHOTO			
	Pitch:7.50/7.62mm	Pitch:7.50/7.62mm	Pitch:7.50/7.62mm
产品图纸 PRODUCT PLAN			
	N=Number of contacts	N=Number of contacts	N=Number of contacts
产品型号 MODEL	<b>KF2EDGV-X</b>	<b>KF2EDGR-X</b>	<b>KF2EDGCV-X</b>
材质&电镀 MATERIAL	M2.5, 钢, 镀锌 Steel, Zinc Plated 磷青铜 Phosphor bronze	M2.5, 钢, 镀锌 Steel, Zinc Plated 磷青铜 Phosphor bronze	M2.5, 钢, 镀锌 Steel, Zinc Plated 磷青铜 Phosphor bronze
螺丝 Screw	-	-	-
触点 Contact	-	-	-
焊针 Pin header	黄铜, 镀锡 Brass, Tin plated	黄铜, 镀锡 Brass, Tin plated	黄铜, 镀锡 Brass, Tin plated
塑件 Housing	PA66, UL94V-0	PA66, UL94V-0	PA66, UL94V-0
电气性能 ELECTRICAL	<b>UL</b> <b>IEC</b>	<b>UL</b> <b>IEC</b>	<b>UL</b> <b>IEC</b>
额定电压 Rated voltage	300V 400V	300V 400V	300V 400V
额定电流 Rated current	15A 20A	15A 20A	15A 20A
接触电阻 Contact resistance	20mΩ	20mΩ	20mΩ
绝缘电阻 Insulation resistance	500MΩ/DC500V	500MΩ/DC500V	500MΩ/DC500V
耐压 Withstanding voltage	AC2500V/1min	AC2500V/1min	AC2500V/1min
使用线径 Wire range	28-12AWG 2.5mm <sup>2</sup>	28-12AWG 2.5mm <sup>2</sup>	28-12AWG 2.5mm <sup>2</sup>
机械性能 MECHANICAL			
温度范围 Temp. range	-40℃~+105℃	-40℃~+105℃	-40℃~+105℃
瞬时温度 Max. soldering	+250℃, 5sec	+250℃, 5sec	+250℃, 5sec
扭矩 Torque	0.4N.m 3.5Lb.in	0.4N.m 3.5Lb.in	0.4N.m 3.5Lb.in
剥线长度 Strip length	7-8mm	7-8mm	7-8mm

产品照片 PRODUCT PHOTO			
	Pitch:7.50/7.62mm	Pitch:7.50/7.62mm	Pitch:7.50/7.62mm
产品图纸 PRODUCT PLAN			
	N=Number of contacts	N=Number of contacts	N=Number of contacts
产品型号 MODEL	<b>KF2EDGCR-X</b>	<b>KF2EDGKA</b>	<b>KF2EDGKAM</b>
材质&电镀 MATERIAL	M2.5, 钢, 镀锌 Steel, Zinc Plated 磷青铜 Phosphor bronze	M2.5, 钢, 镀锌 Steel, Zinc Plated 磷青铜 Phosphor bronze	M2.5, 钢, 镀锌 Steel, Zinc Plated 磷青铜 Phosphor bronze
螺丝 Screw	-	-	-
触点 Contact	-	-	-
焊针 Pin header	黄铜, 镀锡 Brass, Tin plated	黄铜, 镀锡 Brass, Tin plated	黄铜, 镀锡 Brass, Tin plated
塑件 Housing	PA66, UL94V-0	PA66, UL94V-0	PA66, UL94V-0
电气性能 ELECTRICAL	<b>UL</b> <b>IEC</b>	<b>UL</b> <b>IEC</b>	<b>UL</b> <b>IEC</b>
额定电压 Rated voltage	300V 400V	300V 400V	300V 400V
额定电流 Rated current	15A 20A	15A 10A	15A 10A
接触电阻 Contact resistance	20mΩ	20mΩ	20mΩ
绝缘电阻 Insulation resistance	500MΩ/DC500V	500MΩ/DC500V	500MΩ/DC500V
耐压 Withstanding voltage	AC2500V/1min	AC2500V/1min	AC2500V/1min
使用线径 Wire range	28-12AWG 2.5mm <sup>2</sup>	28-12AWG 2.5mm <sup>2</sup>	28-12AWG 2.5mm <sup>2</sup>
机械性能 MECHANICAL			
温度范围 Temp. range	-40℃~+105℃	-40℃~+150℃	-40℃~+150℃
瞬时温度 Max. soldering	+250℃, 5sec	+250℃, 5sec	+250℃, 5sec
扭矩 Torque	0.5N.m 4.4Lb.in	0.5N.m 4.4Lb.in	0.4N.m 3.5Lb.in
剥线长度 Strip length	7-8mm	7-8mm	7-8mm

产品照片 PRODUCT PHOTO			
	Pitch:7.50/7.62mm	Pitch:7.50/7.62mm	Pitch:5.00/5.08mm
产品图纸 PRODUCT PLAN			
	N=Number of contacts	N=Number of contacts	N=Number of contacts
产品型号 MODEL	<b>KF2EDGKB</b>	<b>KF2EDGKBM</b>	<b>KF2ERT</b>
材质&电镀 MATERIAL	M2.5, 钢, 镀锌 Steel, Zinc Plated 磷青铜 Phosphor bronze	M2.5, 钢, 镀锌 Steel, Zinc Plated 磷青铜 Phosphor bronze	M2.5, 钢, 镀锌 Steel, Zinc Plated 磷青铜 Phosphor bronze
螺丝 Screw	-	-	-
触点 Contact	-	-	-
焊针 Pin header	黄铜, 镀锡 Brass, Tin plated	黄铜, 镀锡 Brass, Tin plated	黄铜, 镀锡 Brass, Tin plated
塑件 Housing	PA66, UL94V-0	PA66, UL94V-0	PA66, UL94V-0
电气性能 ELECTRICAL	<b>UL</b> <b>IEC</b>	<b>UL</b> <b>IEC</b>	<b>UL</b> <b>IEC</b>
额定电压 Rated voltage	300V 400V	300V 400V	300V 320V
额定电流 Rated current	15A 10A	15A 10A	15A 20A
接触电阻 Contact resistance	20mΩ	20mΩ	20mΩ
绝缘电阻 Insulation resistance	500MΩ/DC500V	500MΩ/DC500V	500MΩ/DC500V
耐压 Withstanding voltage	AC2500V/1min	AC2500V/1min	AC2000V/1min
使用线径 Wire range	28-12AWG 2.5mm <sup>2</sup>	28-12AWG 2.5mm <sup>2</sup>	28-12AWG 2.5mm <sup>2</sup>
机械性能 MECHANICAL			
温度范围 Temp. range	-40℃~+105℃	-40℃~+150℃	-40℃~+105℃
瞬时温度 Max. soldering	+250℃, 5sec	+250℃, 5sec	+250℃, 5sec
扭矩 Torque	0.4N.m 3.5Lb.in	0.4N.m 3.5Lb.in	0.4N.m 3.5Lb.in
剥线长度 Strip length	7-8mm	7-8mm	7-8mm



插座式端子台  
PLUGGABLE TERMINAL BLOCKS



ISO9001 ISO14001 OHSAS18001 CB RoHS REACH



产品照片 PRODUCT PHOTO			
	Pitch:5.00/5.08mm	Pitch:5.00/5.08mm	Pitch:5.00/5.08mm
产品图纸 PRODUCT PLAN			
	N=Number of contacts	N=Number of contacts	N=Number of contacts
产品型号 MODEL	<b>KF2ERTC</b>	<b>KF2ERTM</b>	<b>KF2EFR</b>
材质&电镀 MATERIAL	-	-	-
螺丝 Screw	-	-	-
触点 Contact	-	-	-
焊针 Pin header	黄铜, 镀锡 Brass, Tin plated	黄铜, 镀锡 Brass, Tin plated	黄铜, 镀锡 Brass, Tin plated
塑件 Housing	PA66, UL94V-0	PA66, UL94V-0	PA66, UL94V-0
电气性能 ELECTRICAL	<b>UL</b> <b>IEC</b>	<b>UL</b> <b>IEC</b>	<b>UL</b> <b>IEC</b>
额定电压 Rated voltage	300V	320V	300V
额定电流 Rated current	15A	20A	15A
接触电阻 Contact resistance	20mΩ	20mΩ	20mΩ
绝缘电阻 Insulation resistance	500MΩ/DC500V	500MΩ/DC500V	500MΩ/DC500V
耐电压 Withstanding voltage	AC2000V/1min	AC2000V/1min	AC2000V/1min
使用线径 Wire range	-	-	-
机械性能 MECHANICAL	<b>UL</b> <b>IEC</b>	<b>UL</b> <b>IEC</b>	<b>UL</b> <b>IEC</b>
温度范围 Temp. range	-40°C~+105°C	-40°C~+105°C	-40°C~+105°C
瞬时温度 Max. soldering	+250°C, 5sec	+250°C, 5sec	+250°C, 5sec
扭矩 Torque	-	-	-
剥线长度 Strip length	-	-	-
产品照片 PRODUCT PHOTO			
	Pitch:5.00/5.08mm	Pitch:5.00/5.08mm	Pitch:5.00/5.08mm
产品图纸 PRODUCT PLAN			
	N=Number of contacts	N=Number of contacts	N=Number of contacts
产品型号 MODEL	<b>KF2EFV</b>	<b>KF2EFVM</b>	<b>KF2EFRM</b>
材质&电镀 MATERIAL	-	-	-
螺丝 Screw	-	-	-
触点 Contact	-	-	-
焊针 Pin header	磷青铜, 镀锡 Phosphor bronze, Tin plated	磷青铜, 镀锡 Phosphor bronze, Tin plated	磷青铜, 镀锡 Phosphor bronze, Tin plated
塑件 Housing	PA66, UL94V-0	PA66, UL94V-0	PA66, UL94V-0
电气性能 ELECTRICAL	<b>UL</b> <b>IEC</b>	<b>UL</b> <b>IEC</b>	<b>UL</b> <b>IEC</b>
额定电压 Rated voltage	300V	320V	300V
额定电流 Rated current	15A	20A	15A
接触电阻 Contact resistance	20mΩ	20mΩ	20mΩ
绝缘电阻 Insulation resistance	500MΩ/DC500V	500MΩ/DC500V	500MΩ/DC500V
耐电压 Withstanding voltage	AC2000V/1min	AC2000V/1min	AC2000V/1min
使用线径 Wire range	-	-	-
机械性能 MECHANICAL	<b>UL</b> <b>IEC</b>	<b>UL</b> <b>IEC</b>	<b>UL</b> <b>IEC</b>
温度范围 Temp. range	-40°C~+105°C	-40°C~+105°C	-40°C~+105°C
瞬时温度 Max. soldering	+250°C, 5sec	+250°C, 5sec	+250°C, 5sec
扭矩 Torque	-	-	-
剥线长度 Strip length	-	-	-

产品照片 PRODUCT PHOTO			
	Pitch:10.16mm	Pitch:10.16mm	
产品图纸 PRODUCT PLAN			
	N=Number of contacts	N=Number of contacts	
产品型号 MODEL	<b>KF5EK</b>	<b>KF5EKM</b>	<b>KF12E-PJ1</b>
材质&电镀 MATERIAL	-	-	-
螺丝 Screw	M4.0, 钢, 镀锌 Steel, Zinc Plated	M4.0, 钢, 镀锌 Steel, Zinc Plated	塑件 Housing: PA66, UL94V-0
触点 Contact	紫铜 Copper	紫铜 Copper	
方块 Clamp	黄铜, 镀镍 Brass, Ni plated	黄铜, 镀镍 Brass, Ni plated	
塑件 Housing	PA66, UL94V-0	PA66, UL94V-0	
电气性能 ELECTRICAL	<b>UL</b> <b>IEC</b>	<b>UL</b> <b>IEC</b>	
额定电压 Rated voltage	600V	600V	
额定电流 Rated current	52A	57A	
接触电阻 Contact resistance	20mΩ	20mΩ	
绝缘电阻 Insulation resistance	500MΩ/DC500V	500MΩ/DC500V	
耐电压 Withstanding voltage	AC6000V/1min	AC6000V/1min	
使用线径 Wire range	20-7AWG 0.5-10.0mm <sup>2</sup>	20-7AWG 0.5-10.0mm <sup>2</sup>	
机械性能 MECHANICAL	<b>UL</b> <b>IEC</b>	<b>UL</b> <b>IEC</b>	
温度范围 Temp. range	-40°C~+150°C	-40°C~+150°C	
瞬时温度 Max. soldering	+250°C, 5sec	+250°C, 5sec	
扭矩 Torque	1.2N.m 10.53Lb.in	1.2N.m 10.53Lb.in	
剥线长度 Strip length	12mm	12mm	
产品照片 PRODUCT PHOTO			
	Pitch:10.16mm	Pitch:10.16mm	
产品图纸 PRODUCT PLAN			
	N=Number of contacts	N=Number of contacts	
产品型号 MODEL	<b>KF5EKR</b>	<b>KF5EKRM</b>	<b>KF12E-PJ2</b>
材质&电镀 MATERIAL	-	-	-
螺母 Nut	黄铜 Brass	黄铜 Brass	塑件 Housing: PA66, UL94V-0
焊针 Pin header	紫铜, 镀锡 Copper, Tin plated	紫铜, 镀锡 Copper, Tin plated	
触点 Contact	紫铜 Copper	紫铜 Copper	
塑件 Housing	PA66, UL94V-0	PA66, UL94V-0	
电气性能 ELECTRICAL	<b>UL</b> <b>IEC</b>	<b>UL</b> <b>IEC</b>	
额定电压 Rated voltage	300V	600V	
额定电流 Rated current	52A	57A	
接触电阻 Contact resistance	20mΩ	20mΩ	
绝缘电阻 Insulation resistance	500MΩ/DC500V	500MΩ/DC500V	
耐电压 Withstanding voltage	AC6000V/1min	AC6000V/1min	
使用线径 Wire range	-	-	
机械性能 MECHANICAL	<b>UL</b> <b>IEC</b>	<b>UL</b> <b>IEC</b>	
温度范围 Temp. range	-40°C~+150°C	-40°C~+150°C	
瞬时温度 Max. soldering	+250°C, 5sec	+250°C, 5sec	
扭矩 Torque	-	-	
剥线长度 Strip length	-	-	
产品照片 PRODUCT PHOTO			
产品图纸 PRODUCT PLAN			
产品型号 MODEL	<b>KF12E-PJ3</b>		<b>KF12E-PJ3</b>
材质&电镀 MATERIAL	-		-
塑件 Housing	PA66, UL94V-0		塑件 Housing: PA66, UL94V-0