

PTFIX type JUT15 Plug-in Distribution Terminal Blocks

UT-JUT15 / spring serie

JUT15-6-Nx2.5

材料 Material:


壳体Body: PA66 UL94-V-0
连接件Conductor: 铜镀锡Copper Tin Plated
弹簧Spring : SUS301

电力 Electrical:

额定电压/电流 : Voltage rating/Current rating: IEC: 800V/41A
UL: 600V/40A
接触电阻 : Contact resistance: 20m Ω Max
绝缘电阻 : Insulation resistance: DC1000V,1000M Ω Min
耐性电压 : Withstanding Voltage: AC4000V,1 Minute

机械 Mechanical:

接线容量 : Connection Capacity: 6mm² 2.5mm²
剥线长度 : Stripping Length: 14mm
工作温度 : Operating temperature: -40 °C to + 105 °C

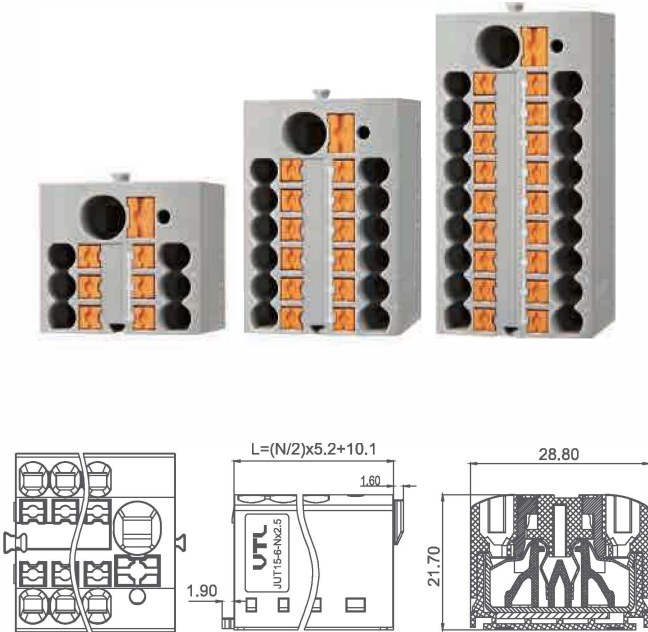

JUT15-Nx2.5

材料 Material:



壳体Body: PA66 UL94-V-0
连接件Conductor: 铜镀锡Copper Tin Plated
弹簧Spring : SUS301

电力 Electrical:

额定电压/电流 : Voltage rating/Current rating: IEC: 800V/30A
UL: 600V/24A
接触电阻 : Contact resistance: 20m Ω Max
绝缘电阻 : Insulation resistance: DC1000V,1000M Ω Min
耐性电压 : Withstanding Voltage: AC4000V,1 Minute

机械 Mechanical:

接线容量 : Connection Capacity: 2.5mm²
剥线长度 : Stripping Length: 14mm
工作温度 : Operating temperature: -40 °C to + 105 °C

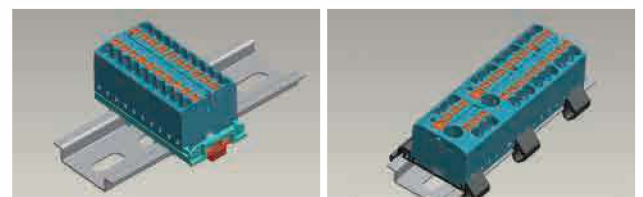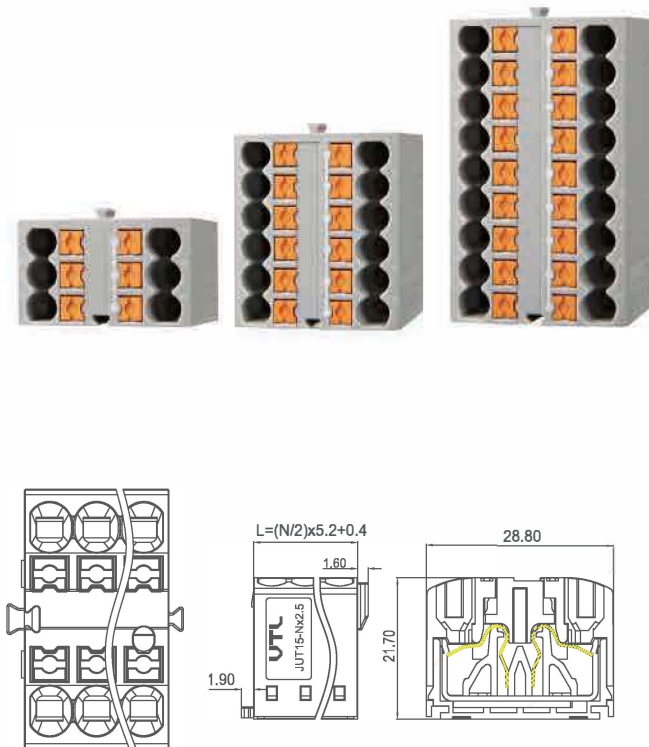




PTFIX type JUT15 Plug-in Distribution Terminal Blocks

UT-JUT15 / spring serie

Mounting options

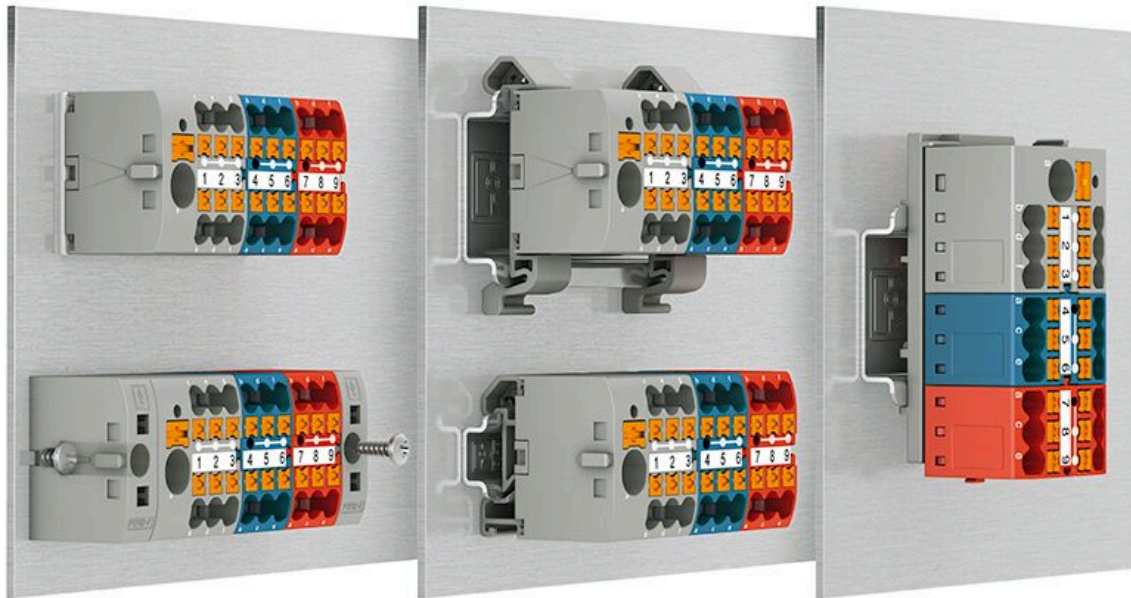

See tutorial video

