

CAT. 5e MODULAR PLUGS FOR ROUND CABLE (FULLY SHIELDED)




SPECIFICATIONS

Voltage Rating: 250 volts AC, at 2 amps.
Dielectric Withstanding Voltage: 1000 volts AC.
Insulation Resistance: 500 megaohms.
Termination Resistance: 20 milliohms min.
Durability: 2000 Cycles
Temp. Rating: -40°C to +120°C
 Available for 24 or 26 AWG wire.



MATERIALS

Body: PC, UL94V-2, clean
Contact: phosphor bronze, underplated 100 microinch Nickel and selective gold in contact region, and gold flash on remainder of terminal.
All materials must be RoHS compliant.
Unit: mm

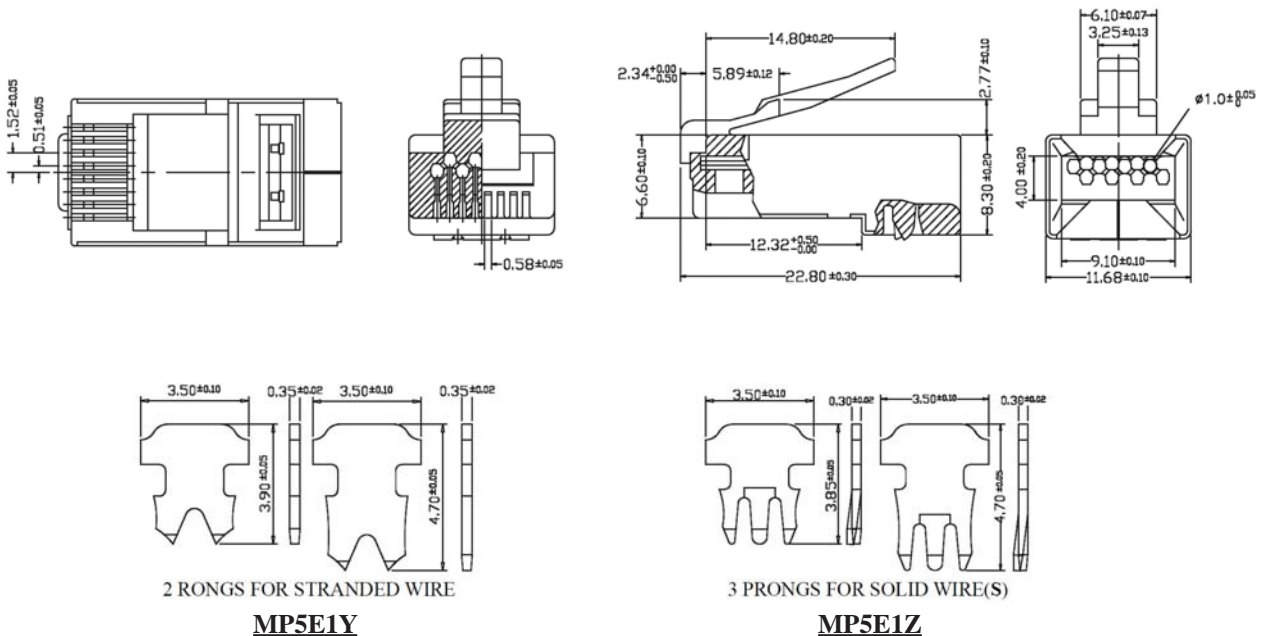


ORDERING INFORMATION:

P/N MP5E $\frac{XX}{1}$ - $\frac{88R}{234}$ $\frac{XX}{4}$

- CONTACT TYPE:
 "1Y" FOR STRANDED WIRE
 "1Z" FOR SOLID WIRES
- NO. OF POSITIONS & CONTACTS:
 "88" 8P8C
- ENTRANCE TYPE:
 "R" ROUND CABLE
- CONTACT FINISH:
 "01" FLASH GOLD PLATED
 "03" 3 MICROINCH GOLD
 "06" 6 MICROINCH GOLD
 "15" 15 MICROINCH GOLD
 "30" 30 MICROINCH GOLD
 "50" 50 MICROINCH GOLD

CAT. 5e MODULAR PLUGS FOR ROUND CABLE (FULLY SHIELDED)

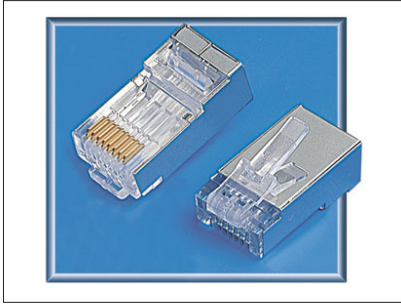


SPECIFICATIONS

Voltage Rating: 250 volts AC, at 2 amps.
Dielectric Withstanding Voltage: 1000 volts AC.
Insulation Resistance: 500 megaohms.
Termination Resistance: 20 milliohms min.
Durability: 2000 Cycles
Temp. Rating: -40°C to +120°C
 Available for 24 or 26 AWG wire.



MATERIALS

Body: PC, UL94V-2, clean
Contact: phosphor bronze, underplated 100 microinch Nickel and selective gold in contact region, and gold flash on remainder of terminal.
All materials must be RoHS compliant.
Unit: mm

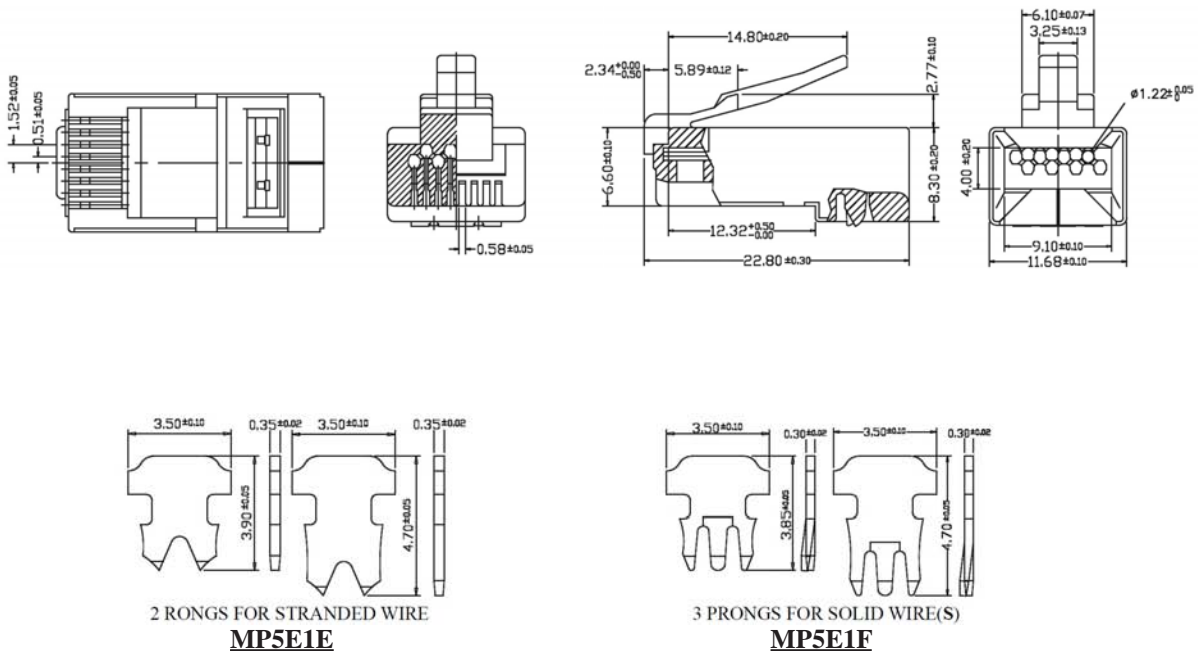

ORDERING INFORMATION:

P/N MP5E $\frac{XX}{1}$ - $\frac{88}{2}$ $\frac{R}{3}$ $\frac{XX}{4}$

1. CONTACT TYPE:
 "1E" FOR STRANDED WIRE
 "1F" FOR SOLID WIRES
2. NO. OF POSITIONS & CONTACTS:
 "88" 8P8C
3. ENTRANCE TYPE:
 "R" ROUND CABLE
4. CONTACT FINISH:
 "01" FLASH GOLD PLATED
 "03" 3 MICROINCH GOLD
 "06" 6 MICROINCH GOLD
 "15" 15 MICROINCH GOLD
 "30" 30 MICROINCH GOLD
 "50" 50 MICROINCH GOLD

NOTE: FOR ϕ 1.22MM WIRES

CAT. 5e MODULAR PLUGS WITH METAL SHIELD FOR ROUND CABLE (FULLY SHIELDED)




SPECIFICATIONS

Voltage Rating: 250 volts AC, at 2 amps.
Dielectric Withstanding Voltage: 1000 volts AC.
Insulation Resistance: 500 megaohms.
Termination Resistance: 20 milliohms min.
Durability: 2000 Cycles
Temp. Rating: -40°C to +120°C
 Available for 24 or 26 AWG wire.



MATERIALS

Body: PC. UL94V-2, clean
Contact: phosphor bronze, underplated 100 microinch Nickel and selective gold in contact region, and gold flash on remainder of terminal.
All materials must be RoHS compliant.
Unit: mm

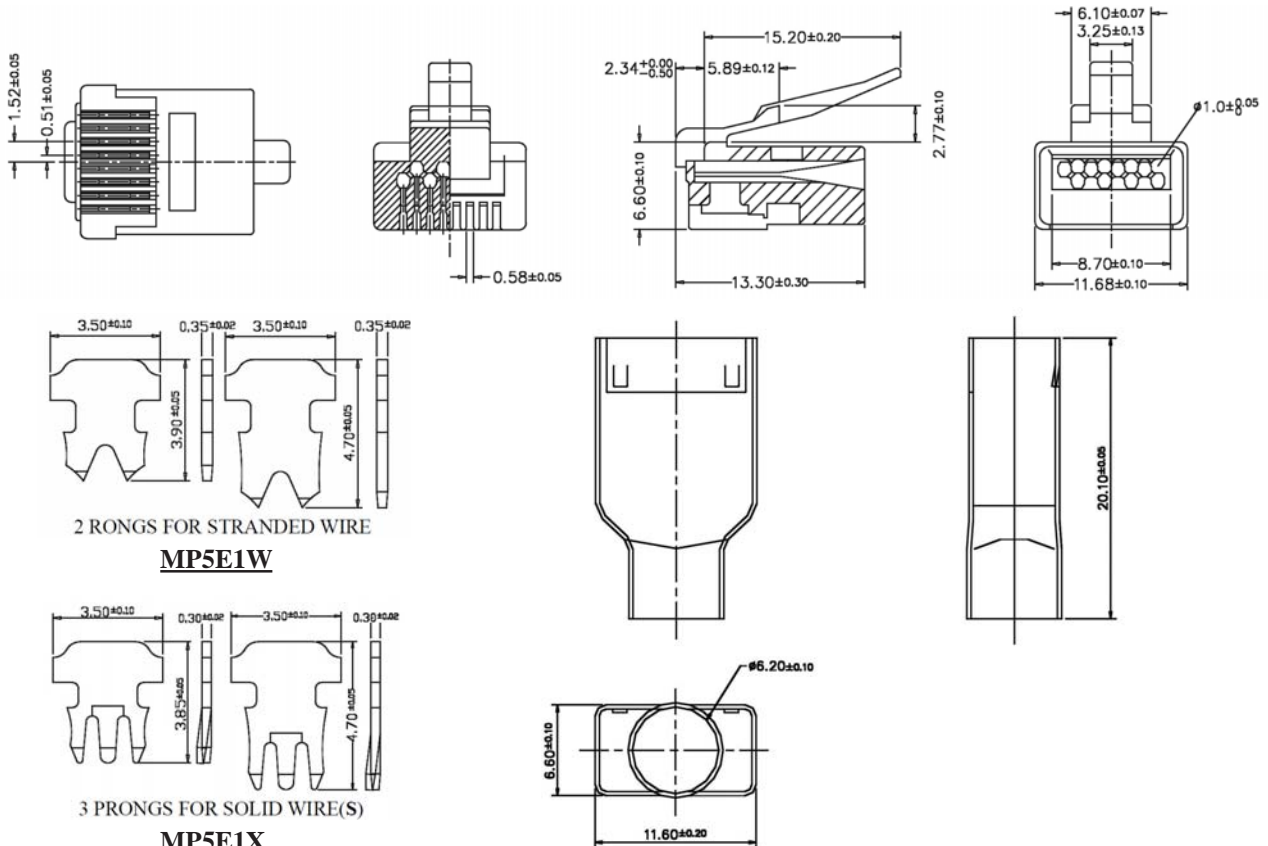

ORDERING INFORMATION:

P/N **MP5E** $\frac{XX}{1}$ - $\frac{88}{2}$ $\frac{R}{3}$ $\frac{XX}{4}$

1. CONTACT TYPE:
 "1W" FOR STRANDED WIRE
 "1X" FOR SOLID WIRES
2. NO. OF POSITIONS & CONTACTS:
 "88" 8P8C
3. ENTRANCE TYPE:
 "R" ROUND CABLE
4. CONTACT FINISH:
 "01" FLASH GOLD PLATED
 "03" 3 MICROINCH GOLD
 "06" 6 MICROINCH GOLD
 "15" 15 MICROINCH GOLD
 "30" 30 MICROINCH GOLD
 "50" 50 MICROINCH GOLD