


## ADAPTER DB09 TO RJ12 (6P6C) MODULAR JACK (UNSHIELDED)




### SPECIFICATIONS

**Dielectric Voltage:** 500 Vrms 60 Sec. Min.  
**Insulation Resistance:** 500 M-Ohm Min.  
**Rating Current:** 1.5 A Min.  
**Contact Resistance:** 20 milli-ohm Max.  
**Temperature Range:** -25°C~85°C  
**Durability:** 500 Mating cycles Min.  
**Wires:** UL-1061 26AWG.

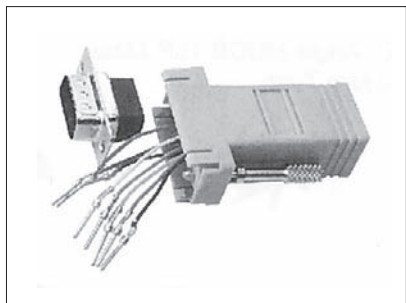

### MATERIALS

**Housing:** ABS Standard (W/O UL Material)  
**Contacts:** D-SUB Phosphor Bronze with Gold flash over Nickel played. RJ12 0.46mm Dia. Phosphor Bronze with 3u Gold plating over Nickel plated.  
**All materials must be RoHS compliant.**  
**Unit: mm**

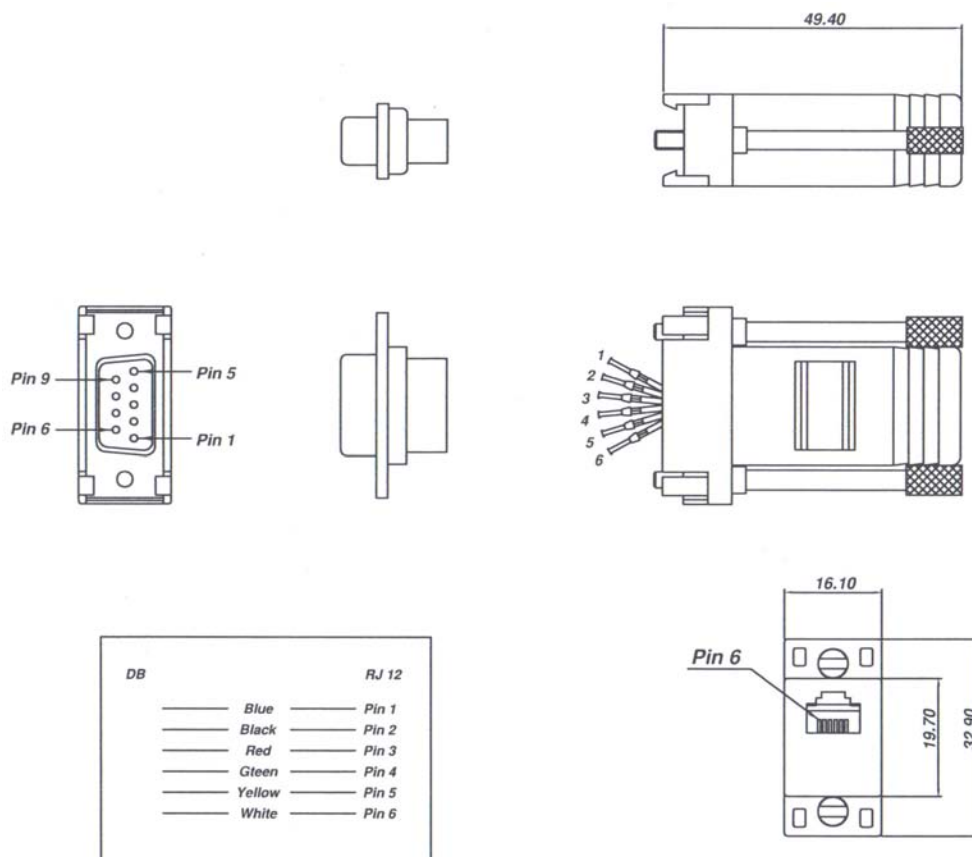


## ORDERING INFORMATION:

**P/N A D T L 09 - xxx U x**  
**1 2 3 4 5**

1. NO. OF CONTACTS FOR D-SUB:  
"09" DB9
2. NO. OF POSITIONS & CONTACTS FOR JACK:  
"64" 6P4C  
"66" 6P6C
3. D-SUB. CONNECTOR TYPE:  
"M" MALE  
"F" FEMALE
4. SHIELD TYPE OF HOUSING:  
"U" UNSHIELDED
5. HOUSING COLOR (FOR UNSHIELDED ONLY):  
"A" GRAY  
"B" BLACK


ADAPTER DB09 TO RJ12 (6P6C) MODULAR JACK (SHIELDED)

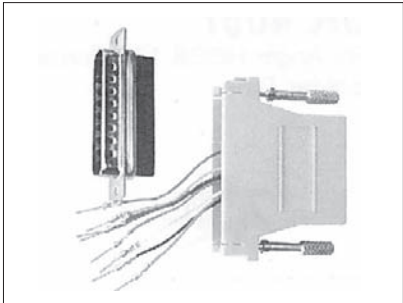

**SPECIFICATIONS**  
Dielectric Voltage: 500 Vrms 60 Sec. Min.  
Insulation Resistance: 500 M-Ohm Min.  
Rating Current: 1.5 A Min.  
Contact Resistance: 20 milli-ohm Max.  
Temperature Range: -25°C~85°C  
Durability: 500 Mating cycles Min.  
Wires: UL-1061 26AWG.



**MATERIALS**  
Housing: ABS Standard (W/O UL Material)  
Contacts: D-SUB Phosphor Bronze with Gold flash over Nickel played. RJ12 0.46mm Dia. Phosphor Bronze with 3u Gold plating over Nickel plated.  
All materials must be RoHS compliant.  
Unit: mm

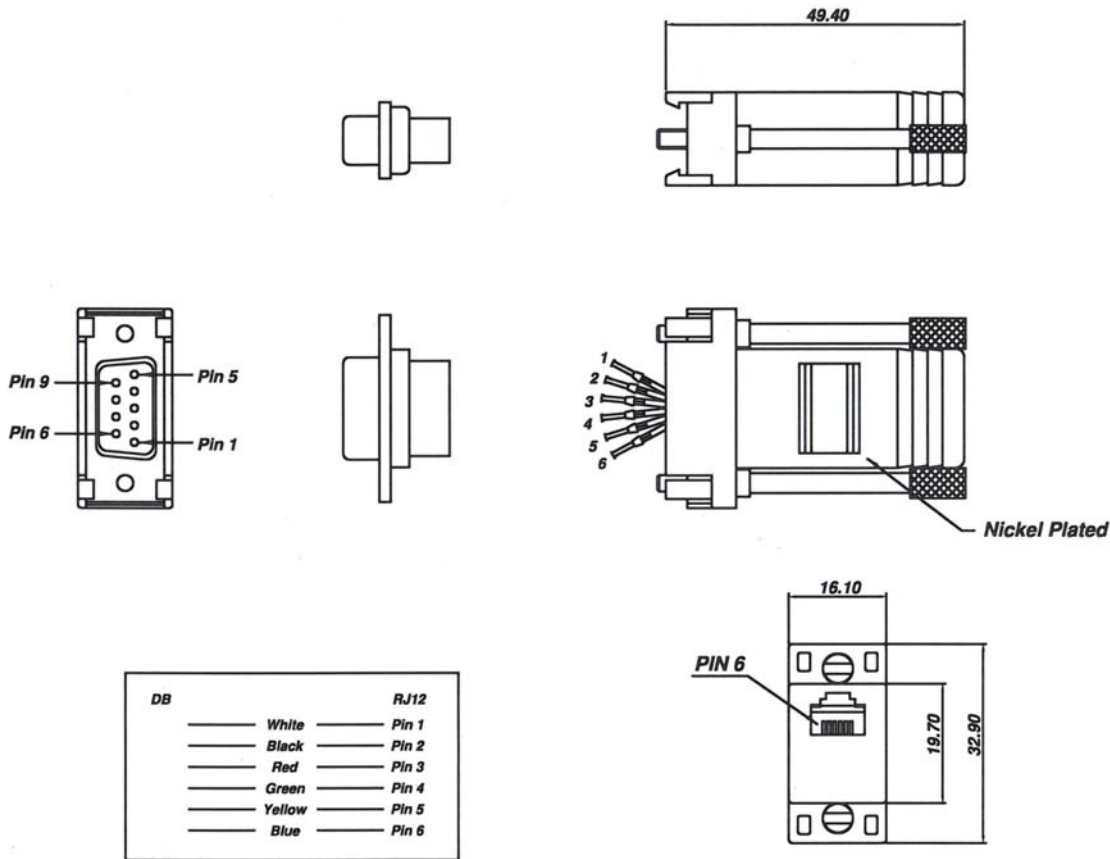


ORDERING INFORMATION:

P/N A D T L 09 - xxx C  
          1      2 3 4

- 1. NO. OF CONTACTS FOR D-SUB:  
"09" DB9
- 2. NO. OF POSITIONS & CONTACTS FOR JACK:  
"64" 6P4C  
"66" 6P6C
- 3. D-SUB. CONNECTOR TYPE:  
"M" MALE  
"F" FEMALE
- 4. SHIELD TYPE OF HOUSING:  
"C" NICKEL PLATED

## ADAPTER DB09 TO RJ45 (8P8C) MODULAR JACK (UNSHIELDED)

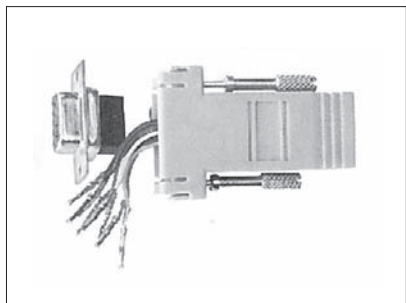


### SPECIFICATIONS

**Dielectric Voltage:** 500 Vrms 60 Sec. Min.  
**Insulation Resistance:** 500 M-Ohm Min.  
**Rating Current:** 1.5 A Min.  
**Contact Resistance:** 20 milli-ohm Max.  
**Temperature Range:** -25°C~85°C  
**Durability:** 500 Mating cycles Min.  
**Wires:** UL-1061 26AWG.



### MATERIALS

**Housing:** ABS Standard (W/O UL Material)  
**Contacts:** D-SUB Phosphor Bronze with Gold flash over Nickel played. RJ45 0.46mm Dia. Phosphor Bronze with 3u Gold plating over Nickel plated.  
**All materials must be RoHS compliant.**  
**Unit:** mm

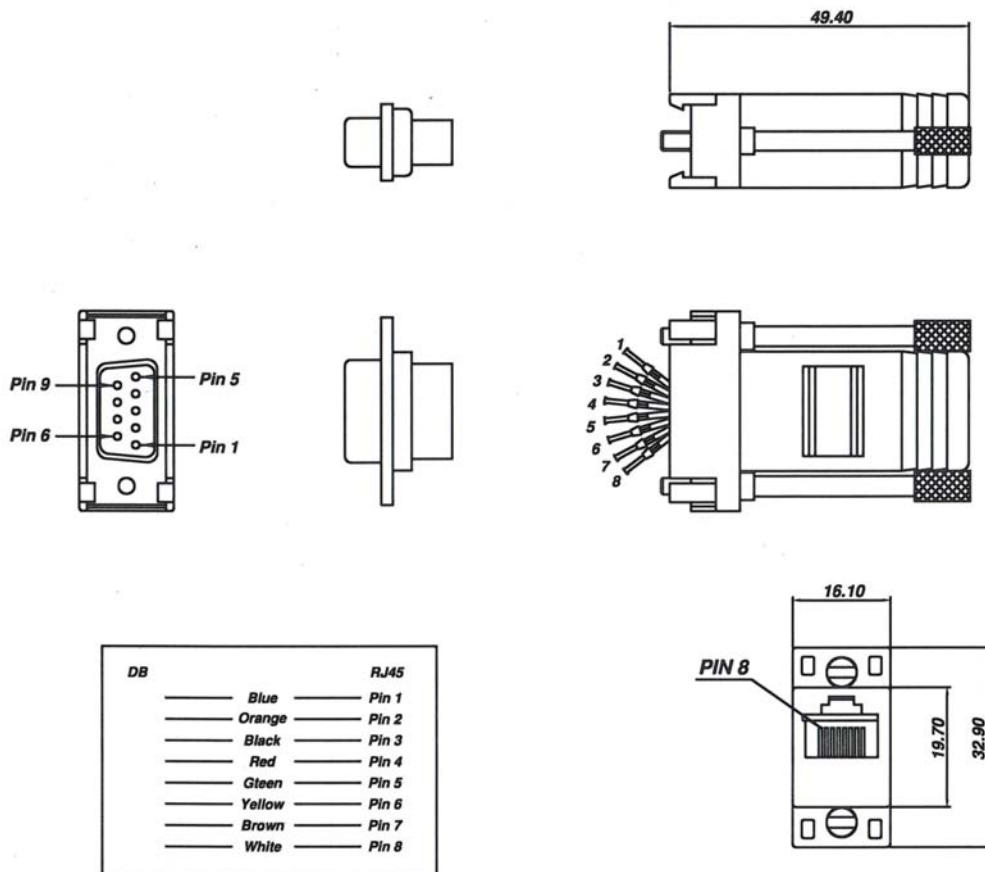


### ORDERING INFORMATION:

**P/N A D T L  $\frac{09}{1}$  -  $\frac{88}{2}$  x  $\frac{U}{3}$  x  $\frac{5}{4}$**

1. NO. OF CONTACTS FOR D-SUB:  
"09" DB9
2. NO. OF POSITIONS & CONTACTS FOR JACK:  
"88" 8P8C
3. D-SUB. CONNECTOR TYPE:  
"M" MALE  
"F" FEMALE
4. SHIELD TYPE OF HOUSING:  
"U" UNSHIELDED
5. HOUSING COLOR (FOR UNSHIELDED ONLY):  
"A" GRAY  
"B" BLACK

ADAPTER DB09 TO RJ45 (8P8C) MODULAR JACK (SHIELDED)

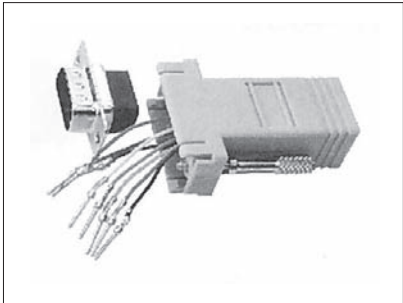


SPECIFICATIONS

Dielectric Voltage: 500 Vrms 60 Sec. Min.  
Insulation Resistance: 500 M-Ohm Min.  
Rating Current: 1.5 A Min.  
Contact Resistance: 20 milli-ohm Max.  
Temperature Range: -25°C~85°C  
Durability: 500 Mating cycles Min.  
Wires: UL-1061 26AWG.



MATERIALS

Housing: ABS Standard (W/O UL Material)  
Contacts: D-SUB Phosphor Bronze with Gold flash over Nickel played. RJ45 0.46mm Dia. Phosphor Bronze with 3u Gold plating over Nickel plated.  
All materials must be RoHS compliant.  
Unit: mm

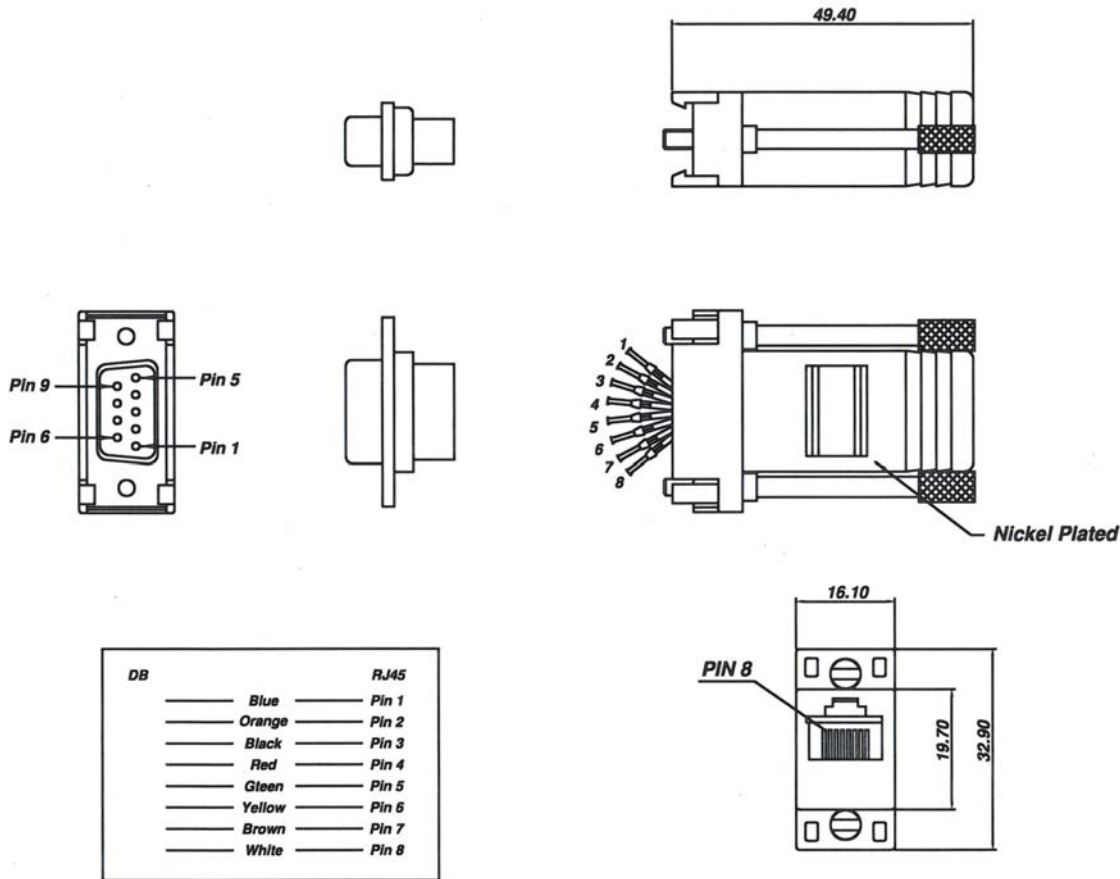

ORDERING INFORMATION:

P/N A D T L  $\frac{09}{1}$  -  $\frac{88}{2}$  x  $\frac{C}{34}$

1. NO. OF CONTACTS FOR D-SUB:  
"09" DB9
2. NO. OF POSITIONS & CONTACTS FOR JACK:  
"88" 8P8C
3. D-SUB. CONNECTOR TYPE:  
"M" MALE  
"F" FEMALE
4. SHIELD TYPE OF HOUSING:  
"C" NICKEL PLATED

ADAPTER DB09 TO RJ69 (10P10C) MODULAR JACK (UNSHIELDED)


SPECIFICATIONS

Dielectric Voltage: 500 Vrms 60 Sec. Min.  
Insulation Resistance: 500 M-Ohm Min.  
Rating Current: 1.5 A Min.  
Contact Resistance: 20 milli-ohm Max.  
Temperature Range: -25°C~85°C  
Durability: 500 Mating cycles Min.  
Wires: UL-1061 26AWG.



MATERIALS

Housing: ABS Standard (W/O UL Material)  
Contacts: D-SUB Phosphor Bronze with Gold flash over Nickel played. RJ69 0.46mm Dia. Phosphor Bronze with 3u Gold plating over Nickel plated.  
All materials must be RoHS compliant.  
Unit: mm

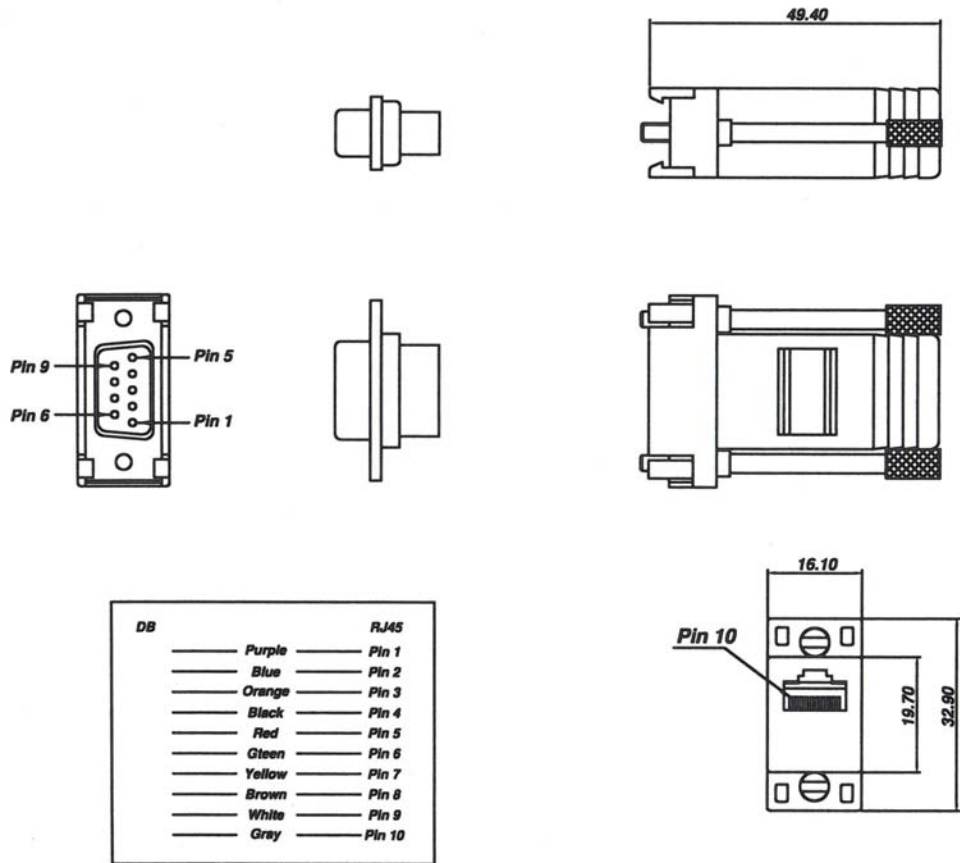

ORDERING INFORMATION:

P/N A D T L 09 - 00 x U x  
1 2 3 4 5

1. NO. OF CONTACTS FOR D-SUB:  
"09" DB9
2. NO. OF POSITIONS & CONTACTS FOR JACK:  
"00" 10P10C
3. D-SUB. CONNECTOR TYPE:  
"M" MALE  
"F" FEMALE
4. SHIELD TYPE OF HOUSING:  
"U" UNSHIELDED
5. HOUSING COLOR (FOR UNSHIELDED ONLY):  
"A" GRAY  
"B" BLACK

ADAPTER DB09 TO RJ69 (10P10C) MODULAR JACK (SHIELDED)


SPECIFICATIONS

Dielectric Voltage: 500 Vrms 60 Sec. Min.  
Insulation Resistance: 500 M-Ohm Min.  
Rating Current: 1.5 A Min.  
Contact Resistance: 20 milli-ohm Max.  
Temperature Range: -25°C~85°C  
Durability: 500 Mating cycles Min.  
Wires: UL-1061 26AWG.



MATERIALS

Housing: ABS Standard (W/O UL Material)  
Contacts: D-SUB Phosphor Bronze with Gold flash over Nickel played. RJ69 0.46mm Dia. Phosphor Bronze with 3u Gold plating over Nickel plated.  
All materials must be RoHS compliant.  
Unit: mm

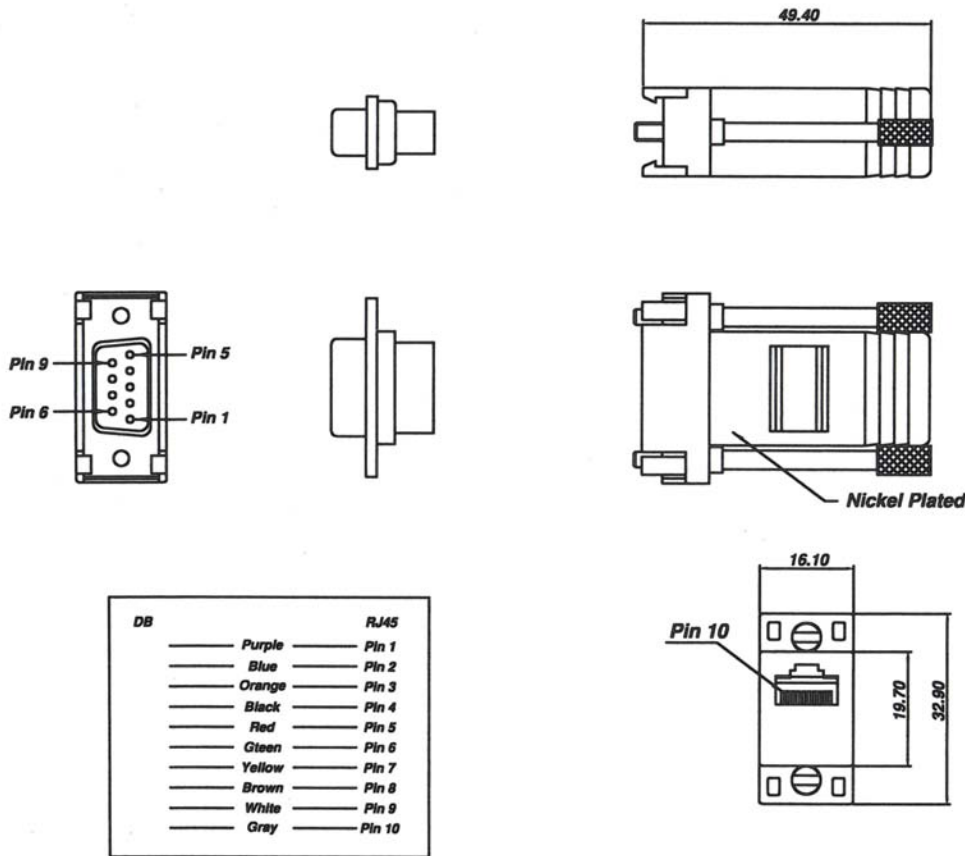

DB		RJ45
—	Purple	Pin 1
—	Blue	Pin 2
—	Orange	Pin 3
—	Black	Pin 4
—	Red	Pin 5
—	Green	Pin 6
—	Yellow	Pin 7
—	Brown	Pin 8
—	White	Pin 9
—	Gray	Pin 10

ORDERING INFORMATION:

P/N A D T L  $\frac{09}{1} - \frac{00}{2} \times \frac{C}{34}$

1. NO. OF CONTACTS FOR D-SUB:  
"09" DB9
2. NO. OF POSITIONS & CONTACTS FOR JACK:  
"00" 10P10C
3. D-SUB. CONNECTOR TYPE:  
"M" MALE  
"F" FEMALE
4. SHIELD TYPE OF HOUSING:  
"C" NICKEL PLATED

ADAPTER DB15 TO RJ12 (6P6C) MODULAR JACK (UNSHIELDED)


SPECIFICATIONS

Dielectric Voltage: 500 Vrms 60 Sec. Min.  
Insulation Resistance: 500 M-Ohm Min.  
Rating Current: 1.5 A Min.  
Contact Resistance: 20 milli-ohm Max.  
Temperature Range: -25°C~85°C  
Durability: 500 Mating cycles Min.  
Wires: UL-1061 26AWG.



MATERIALS

Housing: ABS Standard (W/O UL Material)  
Contacts: D-SUB Phosphor Bronze with Gold flash over Nickel played. RJ12 0.46mm Dia. Phosphor Bronze with 3u Gold plating over Nickel plated.  
All materials must be RoHS compliant.  
Unit: mm

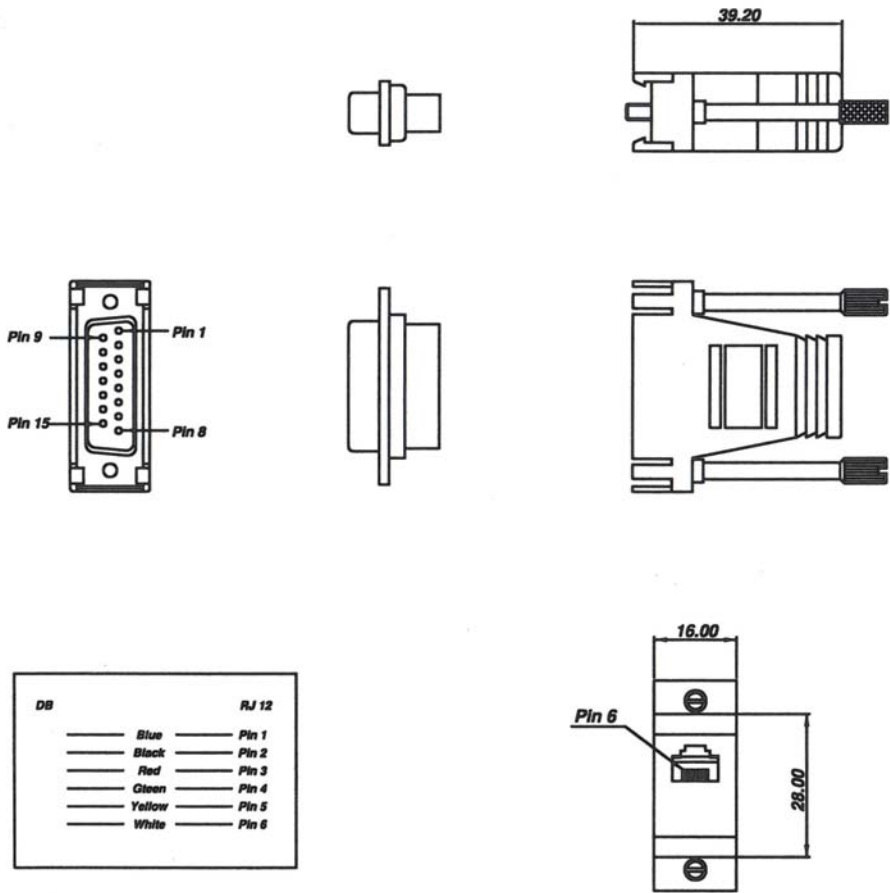

ORDERING INFORMATION:

P/N A D T L 15 - x x x U x  
1 2 3 4 5

1. NO. OF CONTACTS FOR D-SUB:  
"15" DB15
2. NO. OF POSITIONS & CONTACTS FOR JACK:  
"64" 6P4C  
"66" 6P6C
3. D-SUB. CONNECTOR TYPE:  
"M" MALE  
"F" FEMALE
4. SHIELD TYPE OF HOUSING:  
"U" UNSHIELDED
5. HOUSING COLOR (FOR UNSHIELDED ONLY):  
"A" GRAY  
"B" BLACK



ADAPTER DB15 TO RJ12 (6P6C) MODULAR JACK (SHIELDED)


SPECIFICATIONS

Dielectric Voltage: 500 Vrms 60 Sec. Min.  
Insulation Resistance: 500 M-Ohm Min.  
Rating Current: 1.5 A Min.  
Contact Resistance: 20 milli-ohm Max.  
Temperature Range: -25°C~85°C  
Durability: 500 Mating cycles Min.  
Wires: UL-1061 26AWG.



MATERIALS

Housing: ABS Standard (W/O UL Material)  
Contacts: D-SUB Phosphor Bronze with Gold flash over Nickel played. RJ12 0.46mm Dia. Phosphor Bronze with 3u Gold plating over Nickel plated.  
All materials must be RoHS compliant.  
Unit: mm

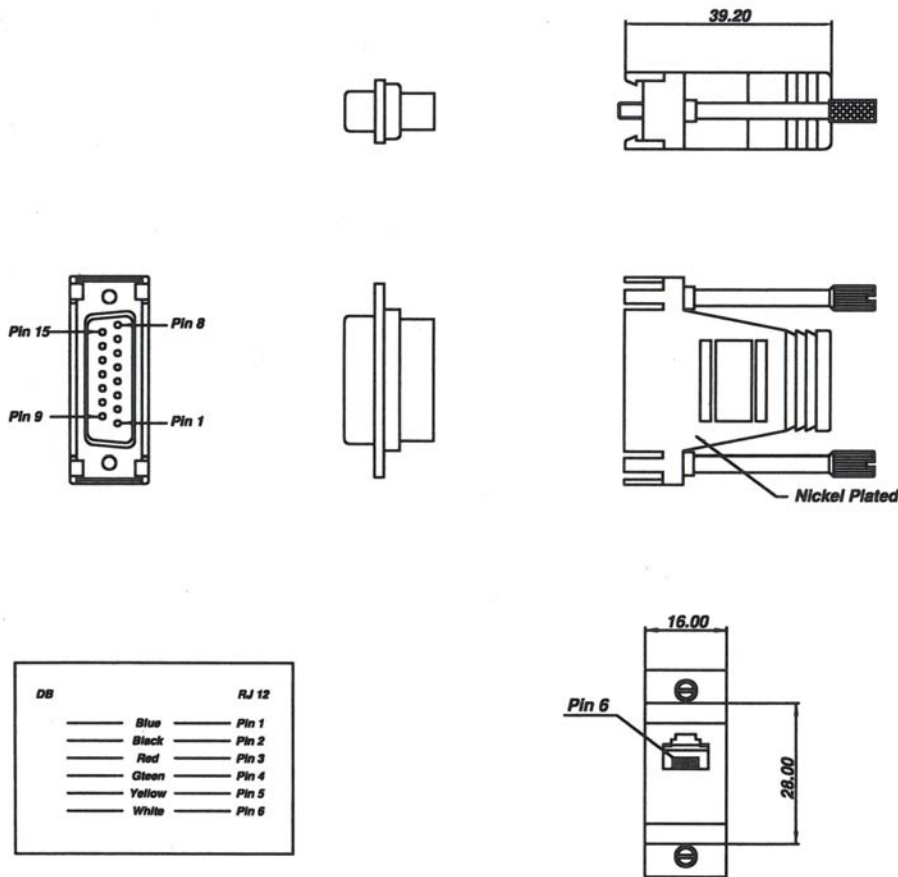

ORDERING INFORMATION:

P/N A D T L  $\frac{15}{1}$  -  $\frac{x x x}{2 3 4}$  C

1. NO. OF CONTACTS FOR D-SUB:  
"15" DB15
2. NO. OF POSITIONS & CONTACTS FOR JACK:  
"64" 6P4C  
"66" 6P6C
3. D-SUB. CONNECTOR TYPE:  
"M" MALE  
"F" FEMALE
4. SHIELD TYPE OF HOUSING:  
"C" NICKEL PLATED



## ADAPTER DB15 TO RJ45 (8P8C) MODULAR JACK (UNSHIELDED)

### SPECIFICATIONS

**Dielectric Voltage:** 500 Vrms 60 Sec. Min.

**Insulation Resistance:** 500 M-Ohm Min.

**Rating Current:** 1.5 A Min.

**Contact Resistance:** 20 milli-ohm Max.

**Temperature Range:** -25°C~85°C

**Durability:** 500 Mating cycles Min.

**Wires:** UL-1061 26AWG.




### MATERIALS

**Housing:** ABS Standard (W/O UL Material)

**Contacts:** D-SUB Phosphor Bronze with Gold flash over Nickel played. RJ45 0.46mm Dia. Phosphor Bronze with 3u Gold plating over Nickel plated.

**All materials must be RoHS compliant.**

**Unit: mm**

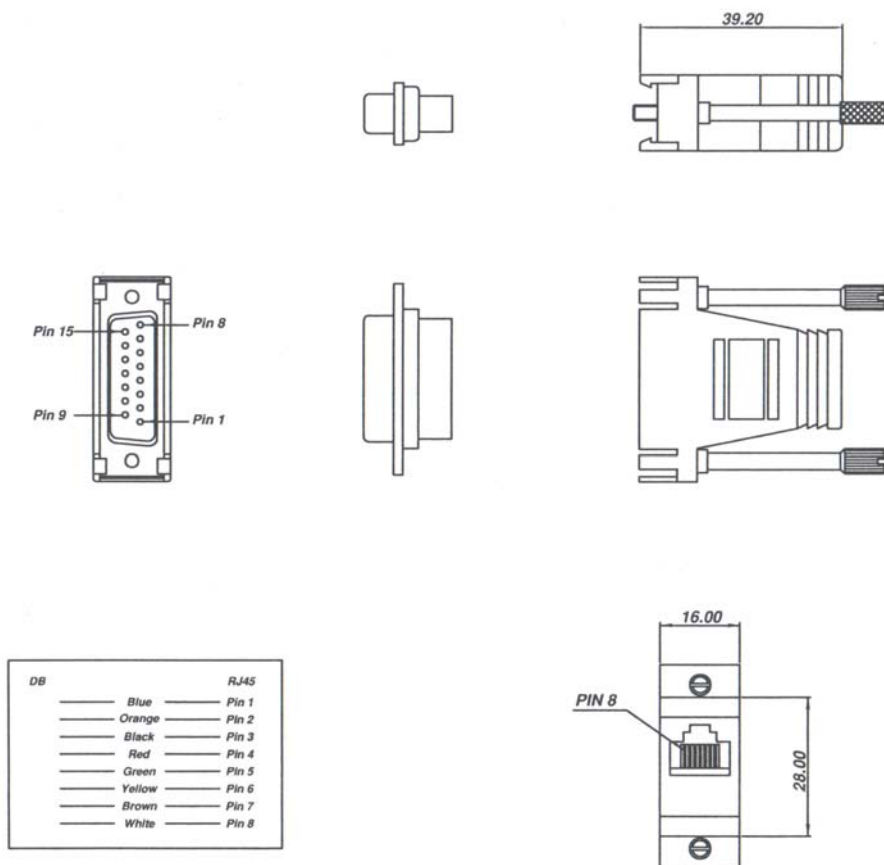

### ORDERING INFORMATION:

**P/N A D T L  $\frac{15}{1}$  -  $\frac{88}{2}$  x  $\frac{U}{3}$  x  $\frac{5}{4}$**

1. NO. OF CONTACTS FOR D-SUB:  
"15" DB15
2. NO. OF POSITIONS & CONTACTS FOR JACK:  
"88" 8P8C
3. D-SUB. CONNECTOR TYPE:  
"M" MALE  
"F" FEMALE
4. SHIELD TYPE OF HOUSING:  
"U" UNSHIELDED
5. HOUSING COLOR (FOR UNSHIELDED ONLY):  
"A" GRAY  
"B" BLACK

ADAPTER DB15 TO RJ45 (8P8C) MODULAR JACK (SHIELDED)


SPECIFICATIONS

Dielectric Voltage: 500 Vrms 60 Sec. Min.  
Insulation Resistance: 500 M-Ohm Min.  
Rating Current: 1.5 A Min.  
Contact Resistance: 20 milli-ohm Max.  
Temperature Range: -25°C~85°C  
Durability: 500 Mating cycles Min.  
Wires: UL-1061 26AWG.



MATERIALS

Housing: ABS Standard (W/O UL Material)  
Contacts: D-SUB Phosphor Bronze with Gold flash over Nickel played. RJ45 0.46mm Dia. Phosphor Bronze with 3u Gold plating over Nickel plated.  
All materials must be RoHS compliant.  
Unit: mm

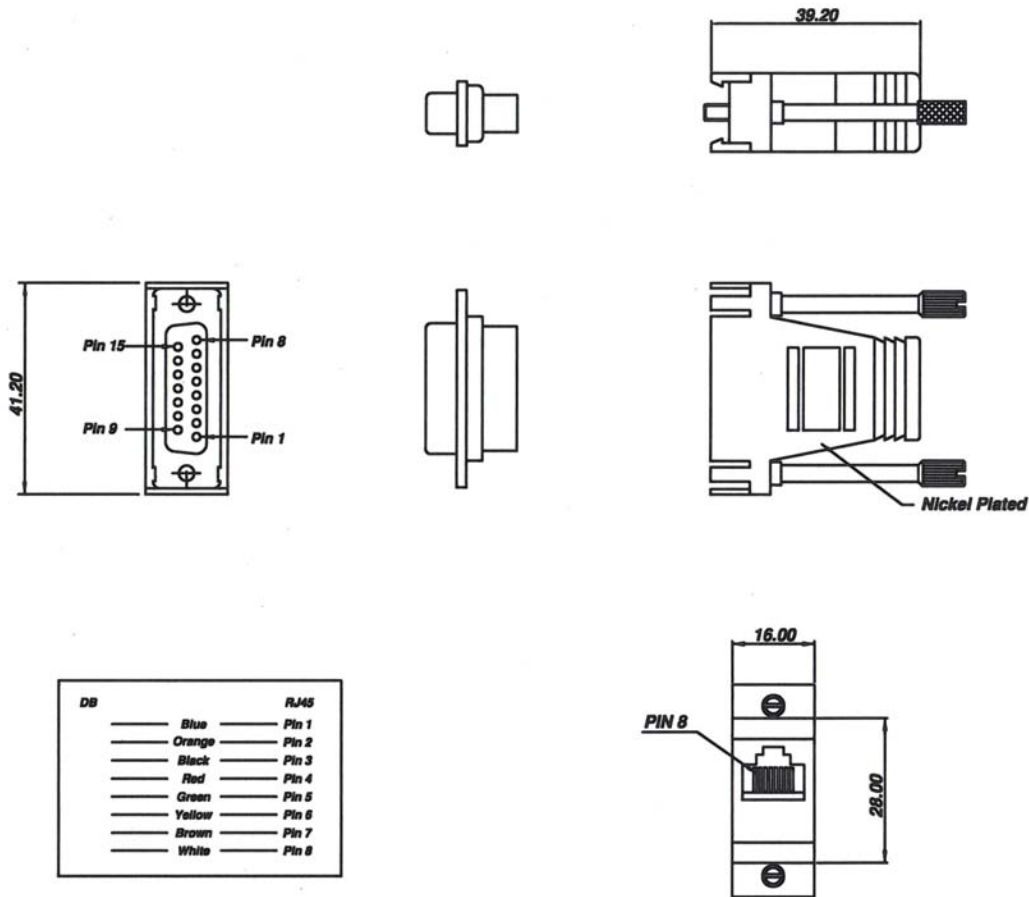

DB		RJ45
—	Blue	Pin 1
—	Orange	Pin 2
—	Black	Pin 3
—	Red	Pin 4
—	Green	Pin 5
—	Yellow	Pin 6
—	Brown	Pin 7
—	White	Pin 8

ORDERING INFORMATION:

P/N A D T L  $\frac{15}{1} - \frac{88}{234} \times \frac{C}{4}$

- 1. NO. OF CONTACTS FOR D-SUB:  
"15" DB15
- 2. NO. OF POSITIONS & CONTACTS FOR JACK:  
"88" 8P8C
- 3. D-SUB. CONNECTOR TYPE:  
"M" MALE  
"F" FEMALE
- 4. SHIELD TYPE OF HOUSING:  
"C" NICKEL PLATED

## ADAPTER DB15 TO RJ69 (10P10C) MODULAR JACK (UNSHIELDED)

### SPECIFICATIONS

**Dielectric Voltage:** 500 Vrms 60 Sec. Min.

**Insulation Resistance:** 500 M-Ohm Min.

**Rating Current:** 1.5 A Min.

**Contact Resistance:** 20 milli-ohm Max.

**Temperature Range:** -25°C~85°C

**Durability:** 500 Mating cycles Min.

**Wires:** UL-1061 26AWG.




### MATERIALS

**Housing:** ABS Standard (W/O UL Material)

**Contacts:** D-SUB Phosphor Bronze with Gold flash over Nickel played. RJ69 0.46mm Dia. Phosphor Bronze with 3u Gold plating over Nickel plated.

**All materials must be RoHS compliant.**

**Unit:** mm

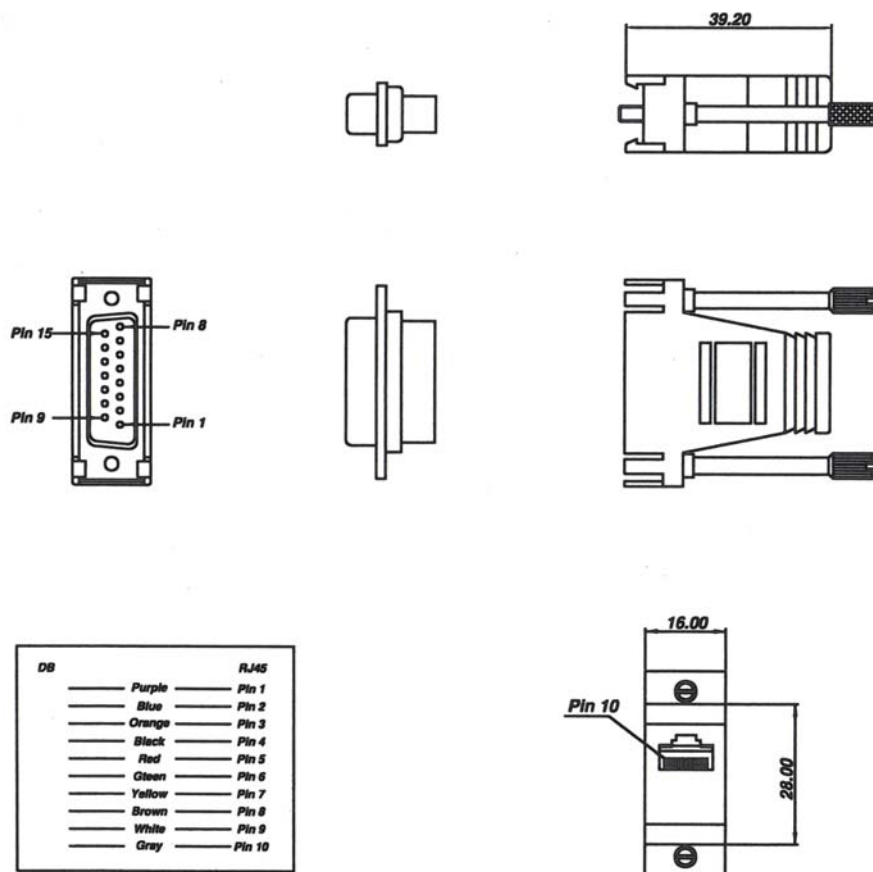

### ORDERING INFORMATION:

P/N A D T L  $\frac{15}{1}$  -  $\frac{00}{2}$  x  $\frac{U}{3}$  x  $\frac{A}{4}$  x  $\frac{B}{5}$

1. NO. OF CONTACTS FOR D-SUB:  
"15" DB15
2. NO. OF POSITIONS & CONTACTS FOR JACK:  
"00" 10P10C
3. D-SUB. CONNECTOR TYPE:  
"M" MALE  
"F" FEMALE
4. SHIELD TYPE OF HOUSING:  
"U" UNSHIELDED
5. HOUSING COLOR (FOR UNSHIELDED ONLY):  
"A" GRAY  
"B" BLACK

## ADAPTER DB15 TO RJ69 (10P10C) MODULAR JACK (SHIELDED)

### SPECIFICATIONS

**Dielectric Voltage:** 500 Vrms 60 Sec. Min.

**Insulation Resistance:** 500 M-Ohm Min.

**Rating Current:** 1.5 A Min.

**Contact Resistance:** 20 milli-ohm Max.

**Temperature Range:** -25°C~85°C

**Durability:** 500 Mating cycles Min.

**Wires:** UL-1061 26AWG.




### MATERIALS

**Housing:** ABS Standard (W/O UL Material)

**Contacts:** D-SUB Phosphor Bronze with Gold flash over Nickel played. RJ69 0.46mm Dia. Phosphor Bronze with 3u Gold plating over Nickel plated.

**All materials must be RoHS compliant.**

**Unit: mm**

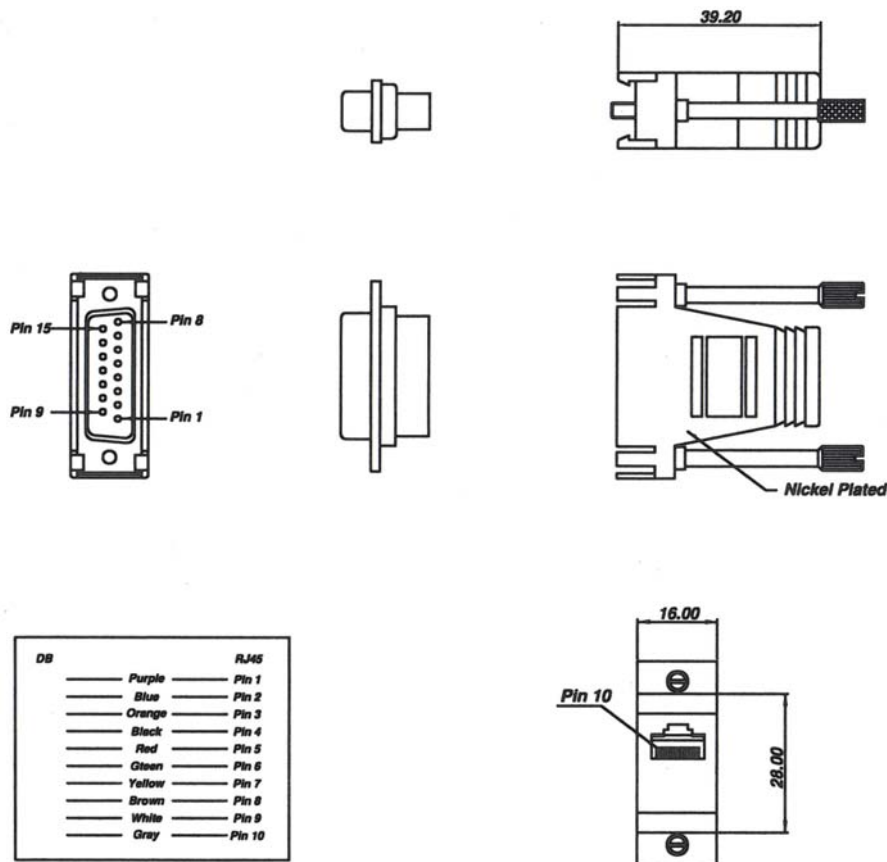

### ORDERING INFORMATION:

**P/N A D T L  $\frac{15}{1} - \frac{00}{2} \times \frac{C}{34}$**

1. NO. OF CONTACTS FOR D-SUB:  
"15" DB15
2. NO. OF POSITIONS & CONTACTS FOR JACK:  
"00" 10P10C
3. D-SUB. CONNECTOR TYPE:  
"M" MALE  
"F" FEMALE
4. SHIELD TYPE OF HOUSING:  
"C" NICKEL PLATED

## ADAPTER DB25 TO RJ12 (6P6C) MODULAR JACK (UNSHIELDED)


### SPECIFICATIONS

**Dielectric Voltage:** 500 Vrms 60 Sec. Min.  
**Insulation Resistance:** 500 M-Ohm Min.  
**Rating Current:** 1.5 A Min.  
**Contact Resistance:** 20 milli-ohm Max.  
**Temperature Range:** -25°C~85°C  
**Durability:** 500 Mating cycles Min.  
**Wires:** UL-1061 26AWG.



### MATERIALS

**Housing:** ABS Standard (W/O UL Material)  
**Contacts:** D-SUB Phosphor Bronze with Gold flash over Nickel played. RJ12 0.46mm Dia. Phosphor Bronze with 3u Gold plating over Nickel plated.  
**All materials must be RoHS compliant.**  
**Unit: mm**

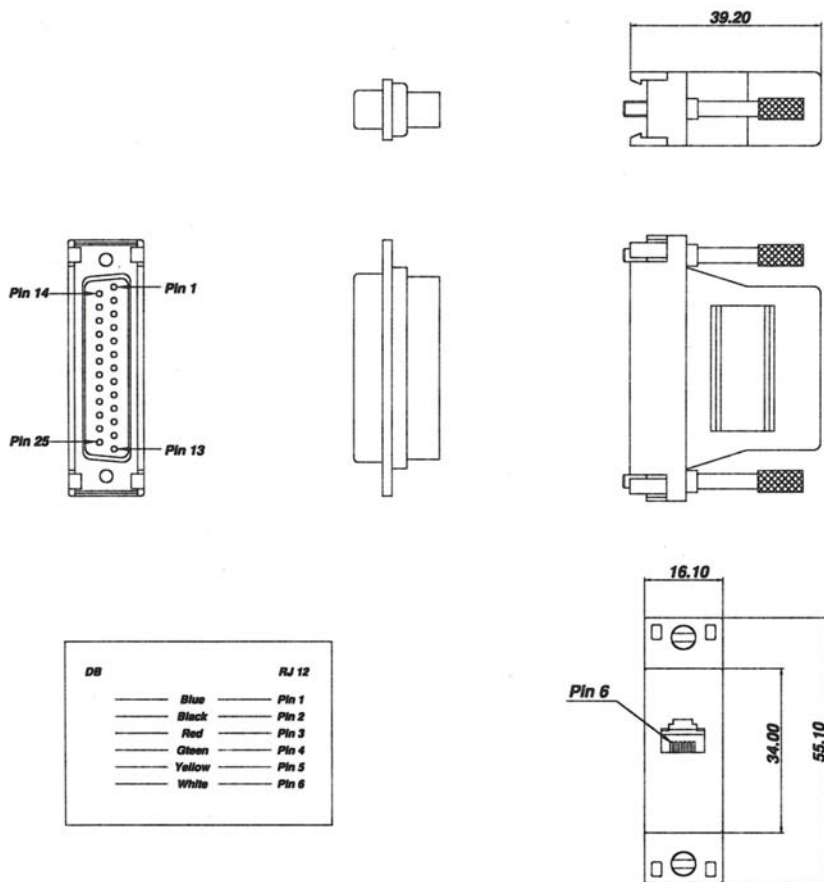

### ORDERING INFORMATION:

**P/N A D T L  $\frac{25}{1}$  -  $\frac{xx}{2}$   $\frac{xx}{3}$   $\frac{U}{4}$   $\frac{x}{5}$**

1. NO. OF CONTACTS FOR D-SUB:  
"25" DB25
2. NO. OF POSITIONS & CONTACTS FOR JACK:  
"64" 6P4C  
"66" 6P6C
3. D-SUB. CONNECTOR TYPE:  
"M" MALE  
"F" FEMALE
4. SHIELD TYPE OF HOUSING:  
"U" UNSHIELDED
5. HOUSING COLOR (FOR UNSHIELDED ONLY):  
"A" GRAY  
"B" BLACK

ADAPTER DB25 TO RJ12 (6P6C) MODULAR JACK (SHIELDED)


SPECIFICATIONS

Dielectric Voltage: 500 Vrms 60 Sec. Min.  
Insulation Resistance: 500 M-Ohm Min.  
Rating Current: 1.5 A Min.  
Contact Resistance: 20 milli-ohm Max.  
Temperature Range: -25°C~85°C  
Durability: 500 Mating cycles Min.  
Wires: UL-1061 26AWG.



MATERIALS

Housing: ABS Standard (W/O UL Material)  
Contacts: D-SUB Phosphor Bronze with Gold flash over Nickel played. RJ12 0.46mm Dia. Phosphor Bronze with 3u Gold plating over Nickel plated.  
All materials must be RoHS compliant.  
Unit: mm

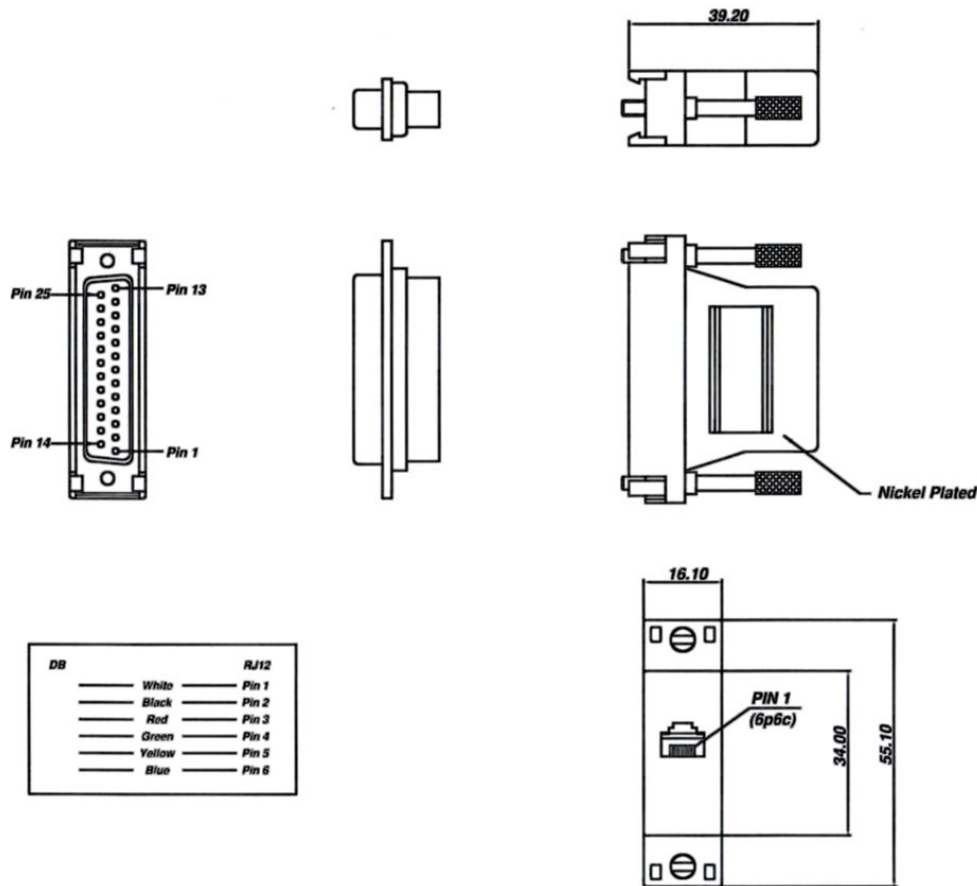


ORDERING INFORMATION:

P/N A D T L  $\frac{25}{1}$  -  $\frac{x x x}{2 3 4}$  C

- 1. NO. OF CONTACTS FOR D-SUB:  
"25" DB25
- 2. NO. OF POSITIONS & CONTACTS FOR JACK:  
"64" 6P4C  
"66" 6P6C
- 3. D-SUB. CONNECTOR TYPE:  
"M" MALE  
"F" FEMALE
- 4. SHIELD TYPE OF HOUSING:  
"C" NICKEL PLATED

## ADAPTER DB25 TO RJ45 (8P8C) MODULAR JACK (UNSHIELDED)

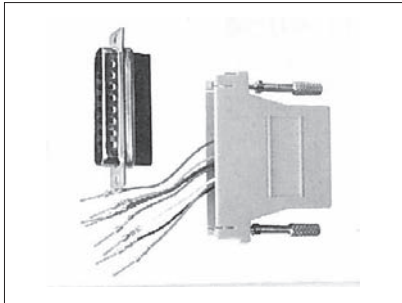


### SPECIFICATIONS

**Dielectric Voltage:** 500 Vrms 60 Sec. Min.  
**Insulation Resistance:** 500 M-Ohm Min.  
**Rating Current:** 1.5 A Min.  
**Contact Resistance:** 20 milli-ohm Max.  
**Temperature Range:** -25°C~85°C  
**Durability:** 500 Mating cycles Min.  
**Wires:** UL-1061 26AWG.



### MATERIALS

**Housing:** ABS Standard (W/O UL Material)  
**Contacts:** D-SUB Phosphor Bronze with Gold flash over Nickel played. RJ45 0.46mm Dia. Phosphor Bronze with 3u Gold plating over Nickel plated.  
**All materials must be RoHS compliant.**  
**Unit: mm**

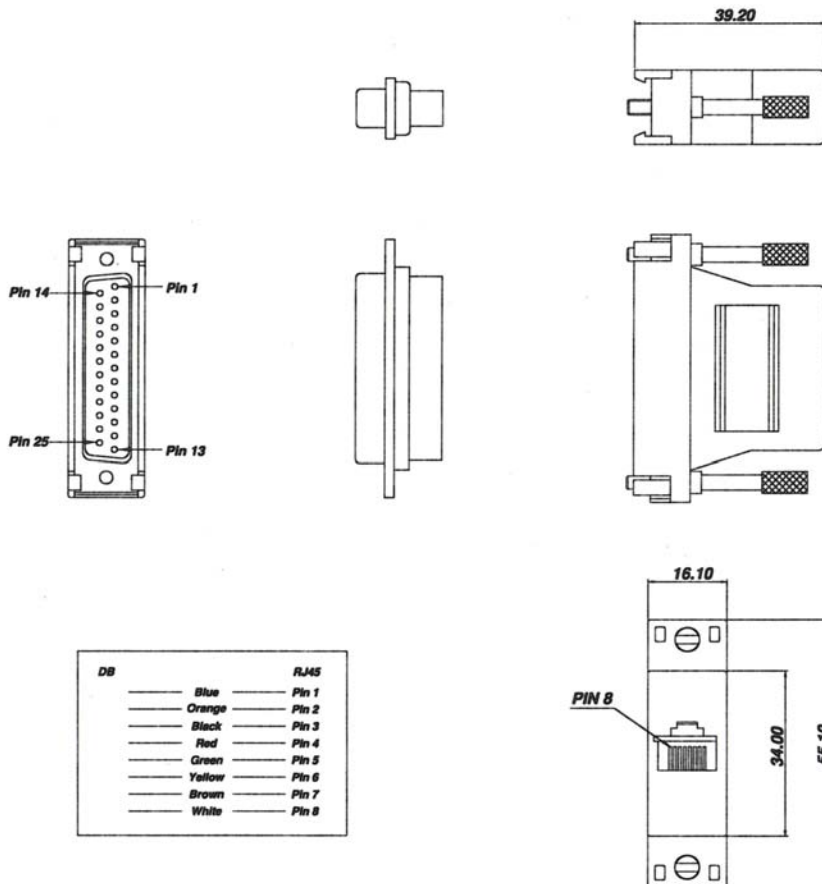


### ORDERING INFORMATION:

**P/N A D T L  $\frac{25}{1}$  -  $\frac{88}{2}$  x  $\frac{U}{3}$  x  $\frac{X}{4}$   $\frac{X}{5}$**

1. NO. OF CONTACTS FOR D-SUB:  
"25" DB25
2. NO. OF POSITIONS & CONTACTS FOR JACK:  
"88" 8P8C
3. D-SUB. CONNECTOR TYPE:  
"M" MALE  
"F" FEMALE
4. SHIELD TYPE OF HOUSING:  
"U" UNSHIELDED
5. HOUSING COLOR (FOR UNSHIELDED ONLY):  
"A" GRAY  
"B" BLACK



ADAPTER DB25 TO RJ45 (8P8C) MODULAR JACK (SHIELDED)

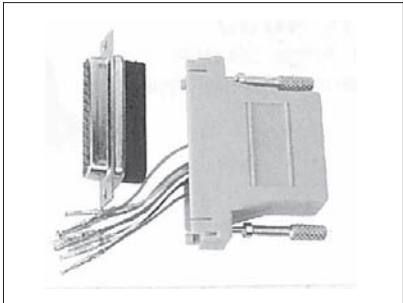


SPECIFICATIONS

Dielectric Voltage: 500 Vrms 60 Sec. Min.  
Insulation Resistance: 500 M-Ohm Min.  
Rating Current: 1.5 A Min.  
Contact Resistance: 20 milli-ohm Max.  
Temperature Range: -25°C~85°C  
Durability: 500 Mating cycles Min.  
Wires: UL-1061 26AWG.



MATERIALS

Housing: ABS Standard (W/O UL Material)  
Contacts: D-SUB Phosphor Bronze with Gold flash over Nickel played. RJ45 0.46mm Dia. Phosphor Bronze with 3u Gold plating over Nickel plated.  
All materials must be RoHS compliant.  
Unit: mm

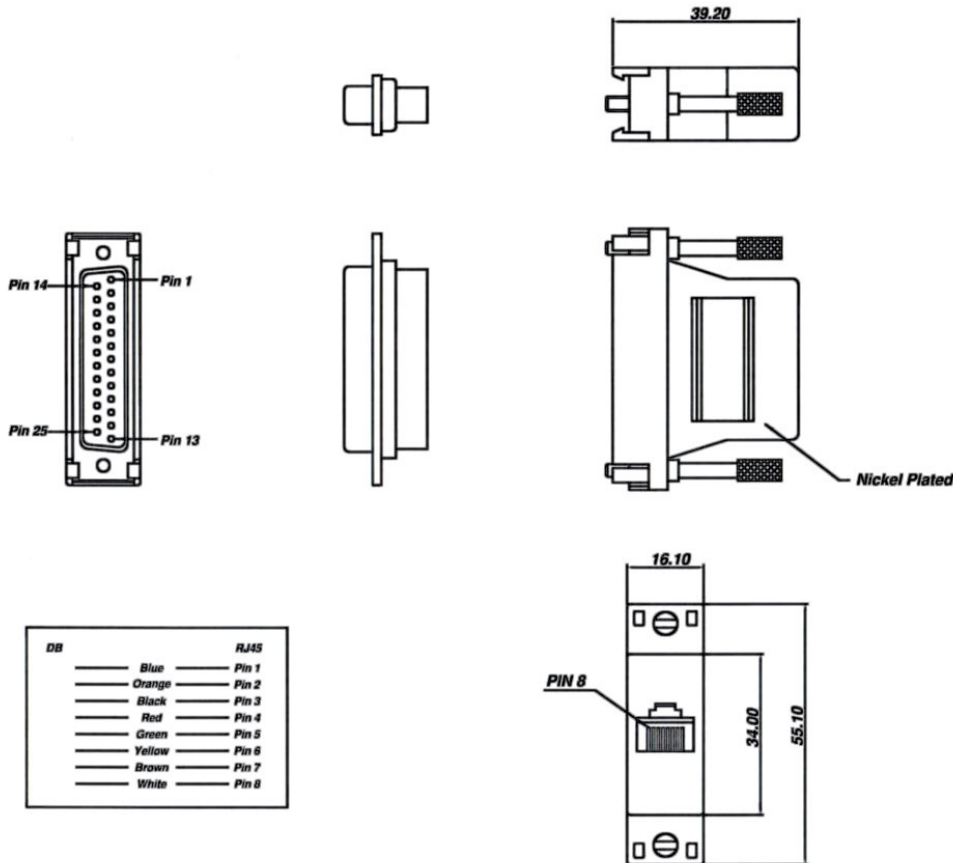

ORDERING INFORMATION:

P/N A D T L  $\frac{25}{1}$  -  $\frac{88}{2}$  x  $\frac{C}{34}$

1. NO. OF CONTACTS FOR D-SUB:  
"25" DB25
2. NO. OF POSITIONS & CONTACTS FOR JACK:  
"88" 8P8C
3. D-SUB. CONNECTOR TYPE:  
"M" MALE  
"F" FEMALE
4. SHIELD TYPE OF HOUSING:  
"C" NICKEL PLATED

## ADAPTER DB25 TO RJ69 (10P10C) MODULAR JACK (UNSHIELDED)


### SPECIFICATIONS

**Dielectric Voltage:** 500 Vrms 60 Sec. Min.  
**Insulation Resistance:** 500 M-Ohm Min.  
**Rating Current:** 1.5 A Min.  
**Contact Resistance:** 20 milli-ohm Max.  
**Temperature Range:** -25°C~85°C  
**Durability:** 500 Mating cycles Min.  
**Wires:** UL-1061 26AWG.



### MATERIALS

**Housing:** ABS Standard (W/O UL Material)  
**Contacts:** D-SUB Phosphor Bronze with Gold flash over Nickel played. RJ69 0.46mm Dia. Phosphor Bronze with 3u Gold plating over Nickel plated.  
**All materials must be RoHS compliant.**  
**Unit: mm**

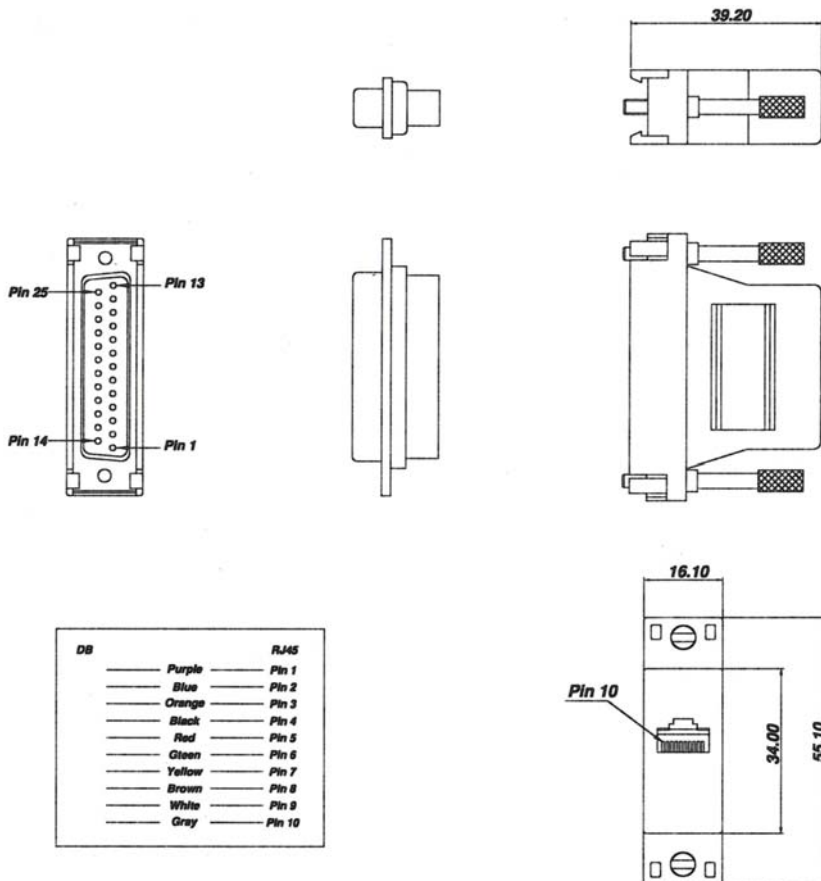

### ORDERING INFORMATION:

P/N A D T L  $\frac{25}{1}$  -  $\frac{00}{2}$  x  $\frac{U}{3}$  x  $\frac{A}{4}$  x  $\frac{B}{5}$

1. NO. OF CONTACTS FOR D-SUB:  
"25" DB25
2. NO. OF POSITIONS & CONTACTS FOR JACK:  
"00" 10P10C
3. D-SUB. CONNECTOR TYPE:  
"M" MALE  
"F" FEMALE
4. SHIELD TYPE OF HOUSING:  
"U" UNSHIELDED
5. HOUSING COLOR (FOR UNSHIELDED ONLY):  
"A" GRAY  
"B" BLACK

ADAPTER DB25 TO RJ69 (10P10C) MODULAR JACK (SHIELDED)


SPECIFICATIONS

Dielectric Voltage: 500 Vrms 60 Sec. Min.  
Insulation Resistance: 500 M-Ohm Min.  
Rating Current: 1.5 A Min.  
Contact Resistance: 20 milli-ohm Max.  
Temperature Range: -25°C~85°C  
Durability: 500 Mating cycles Min.  
Wires: UL-1061 26AWG.



MATERIALS

Housing: ABS Standard (W/O UL Material)  
Contacts: D-SUB Phosphor Bronze with Gold flash over Nickel played. RJ69 0.46mm Dia. Phosphor Bronze with 3u Gold plating over Nickel plated.  
All materials must be RoHS compliant.  
Unit: mm

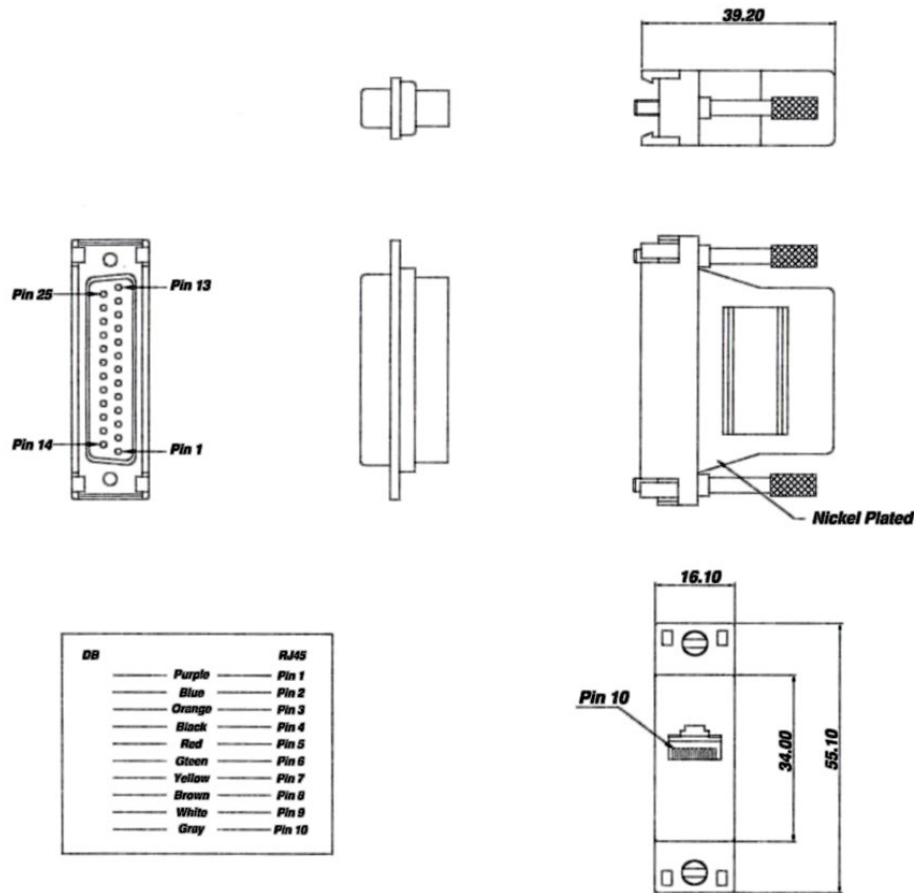

ORDERING INFORMATION:

P/N A D T L  $\frac{25}{1} - \frac{00}{2} \times \frac{C}{34}$

1. NO. OF CONTACTS FOR D-SUB:  
"25" DB25
2. NO. OF POSITIONS & CONTACTS FOR JACK:  
"00" 10P10C
3. D-SUB. CONNECTOR TYPE:  
"M" MALE  
"F" FEMALE
4. SHIELD TYPE OF HOUSING:  
"C" NICKEL PLATED