


SIDE ENTRY UP LATCH MODULAR PCB JACK 15P FOR CAR TELECOMMUNICATION (UNSHIELDED)

SPECIFICATIONS

Insulation Resistance: 500MΩ Min.
Contact Resistance: 20mΩ Max.
Rating Current: 1.5A Max.
Rating Voltage: 120V AC.
Dielectric Voltage: 1000 Vrms 60 Sec. Min.
Temperature Range: -40°C / +85°C
Durability: 500 Mating cycles Min.

MATERIALS

Housing: Nylon (UL 94V-0)
Soldering Temperature: 260°C
Color: Black
Spring Wire: Phosphor Bronze
 Gold plating Over Nickel
All materials must be RoHS compliant.

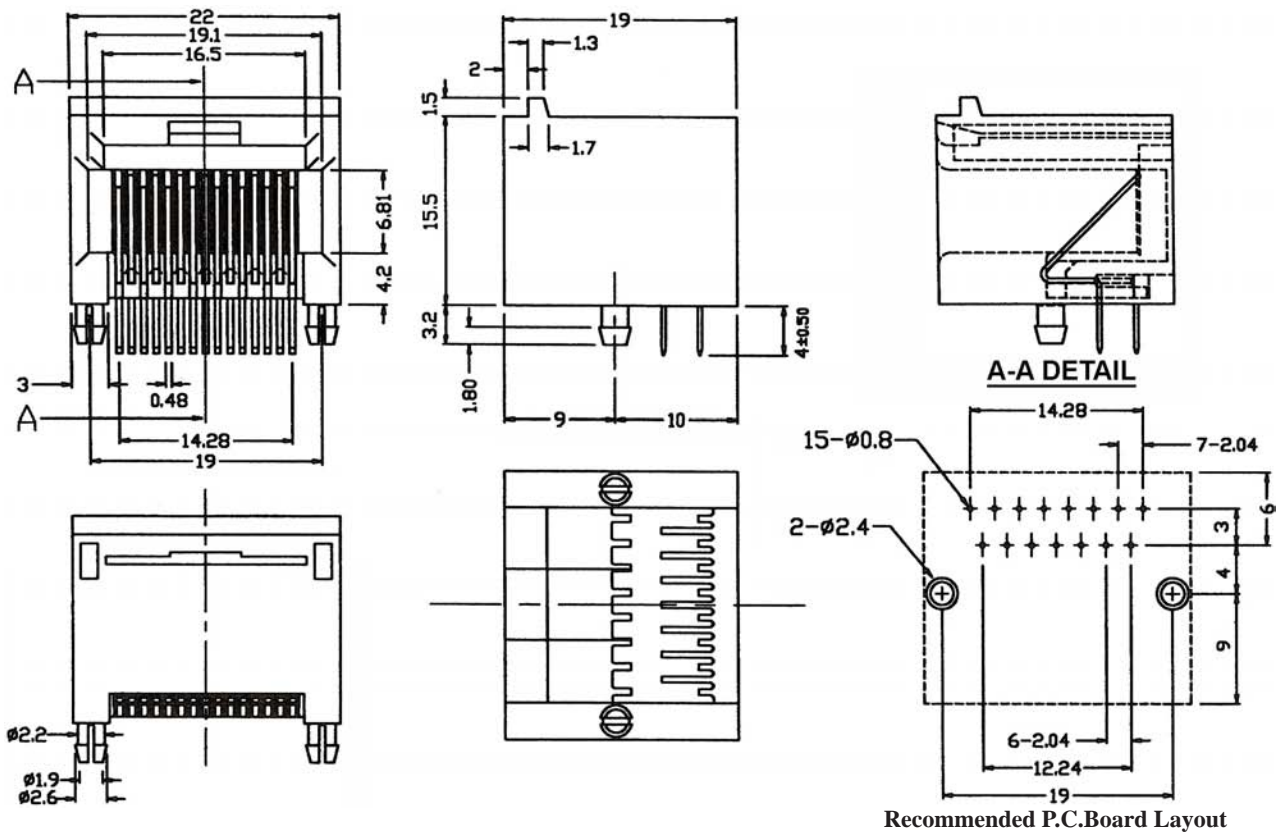

ORDERING INFORMATION:

P/N M J A T - $\frac{15}{1} \times \frac{B}{2} \times \frac{3}{3}$

- NO. OF POSITIONS & CONTACTS:
"15" 15P15C
- CONTACT FINISH:
"A" 6 MICROINCH GOLD
"B" 15 MICROINCH GOLD
"C" 30 MICROINCH GOLD
"D" 50 MICROINCH GOLD
"E" 3 MICROINCH GOLD
- CONTACT FINISH OPTION:
"S" SELECTIVE GOLD PLATED
"G" FULL GOLD PLATED

NOTE: Mates with Modular plug P/N MPAT-15HxxA