
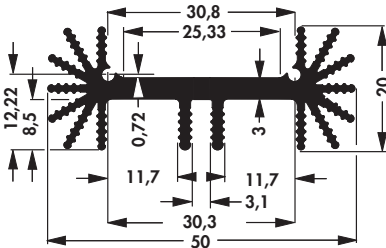
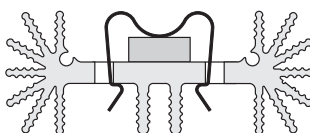
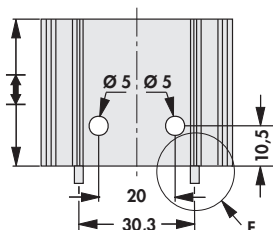






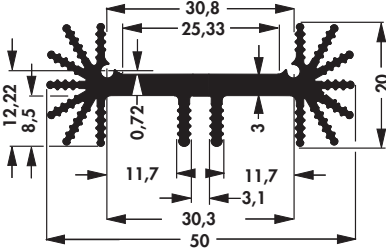

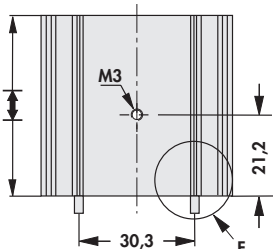







Extruded heatsinks for PCB mounting

- for semiconductor clip-mounting
- special lengths and transistor drillings on request
- **E** = mounting method

						
... STC 						
... STIC 						
... STCB 						
art. no.	 [mm]	R _{th} [K/W]				
SK 459 25 ...	25.0	7.9				
SK 459 37,5 ...	37.5	6.3				
SK 459 50 ...	50.0	5.6	TO 218/ TO 220/ TO 247/ TO 248			
please indicate: ... mounting method						
STC = with solder pin						
STIC = with solder pin and insulating washer						
STCB = with threaded bolt M3, brass						
surface:		black anodised				

- for semiconductor screw-mounting
- special lengths and transistor drillings on request
- **E** = mounting method

						
... STS			... STIS			... STSB
						
art. no.	 [mm]	R _{th} [K/W]				
SK 459 25 ...	25.0	7.9				
SK 459 37,5 ...	37.5	6.3				
SK 459 50 ...	50.0	5.6				
TO 218/ TO 220/ TO 247/ TO 248						
please indicate: ... mounting method						
STS = with solder pin						
STIS = with solder pins and insulating washer						
STSB = with threaded bolt M3, brass						
surface:		black anodised				

