


# SMT0.5 /2.4mm LED Connector

## SMT0.5/2.4mm系列LED 连接器

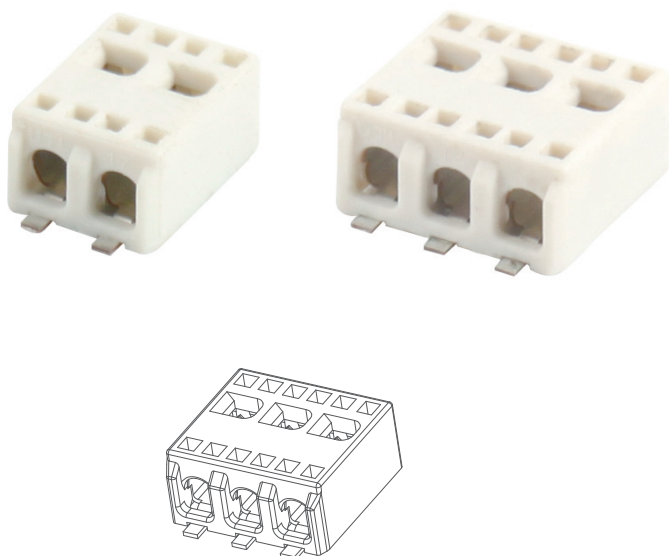

### SMT0.5/2.4 Technical Data

**Material:**

Housing:High temperature resin

Contact:Copper alloy

**Plating specification:**

PRE-TIN over nickel underplate

**Mechanical performance:**

Pullout force:1.5KGF MIN

Insertion Force:1.0KGF MAX

Durability: 5 Cycles

**Electrical performance:**

Rated current:4A AC,DC

Rated voltage:300V AC,DC

Contact resistance:20mΩ MAX

Withstand woltage:AC 1600V

Insulation resistance:1000mΩ MIN

Operating temperature:-30 °C~105 °C

### DIMENTIONS

