


# SMT0.75 /4.0mm LED Connector

## SMT0.75/4.0mm系列LED 连接器

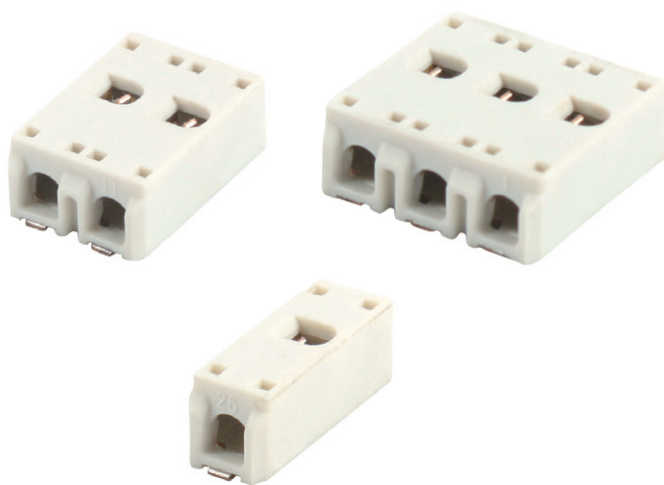

### SMT0.75/4.0 Technical Data

**Material:**

Housing: High temperature resin

Contact: Copper alloy

**Plating specification:**

PRE-TIN over nickel underplate

**Mechanical performance:**

Pullout force: 3.0KGF MIN

Insertion Force: 1.5KGF MAX

Durability: 5 Cycles

**Electrical performance:**

Rated current: 9A AC,DC

Rated voltage: 300V AC,DC

Contact resistance: 20mΩ MAX

Withstand voltage: AC 1600V

Insulation resistance: 1000mΩ MIN

Operating temperature: -30 C ~105 C

### DIMENSIONS

