


AC Rating

R3-45

RU US



(4.8mm)0.187"
Quick connect

FEATURES:

- Material:
Frame: PBT(UL flame: 94V-0).
Terminal: nickel plated brass.
- This fuse holder can string array.
- Mounted by screws.

A
B

RATING	FUSE
8A 125/250V AC	∅ 5.0*20mm
15A 125V AC 10A 250V AC	∅ 6.35*30mm ∅ 6.35*31.8mm


FEATURE:



Mounted with a M3 screw

R3-62-AC

LED Warning Light

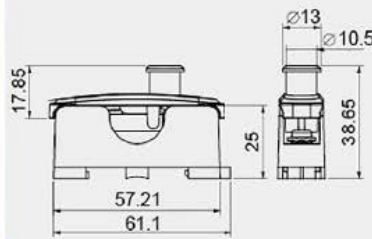

15A 125V/10A 250V AC

1.0~1.2mm

FEATURES:

- Material:
Frame: PBT(UL flame: 94V-0).
Cap: PC(UL flame: 94V-2).
- LED indicates when fuse is broken.
- Mounted by screws or snap-in.

FUSE

∅ 6.35*30mm
∅ 6.35*31.8mm


CUT-OUT



DC Rating

R3-62-DC

LED Warning Light

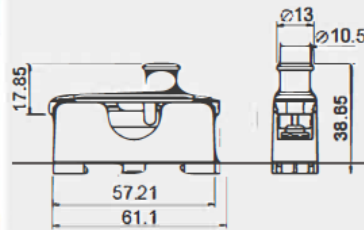

10A 12/24V DC

1.0~1.2mm

FEATURES:

- Material:
Frame: PBT(UL flame: 94V-0).
Cap: PC(UL flame: 94V-2).
- LED indicates when fuse is burned.
- Mounted by screws or snap-in.

FUSE


∅ 6.35*30mm
∅ 6.35*31.8mm

CUT-OUT



R3-72

Heavy Duty




60A max 1 2/24/32V DC

FEATURES:


- Material:
Frame: nylon(UL flame: 94V-0).
Terminal: plated copper.
- Mounted by screws.

	COVER	FUSE
W/O COVER		
With COVER		MAXI FUSE

B



R3-98

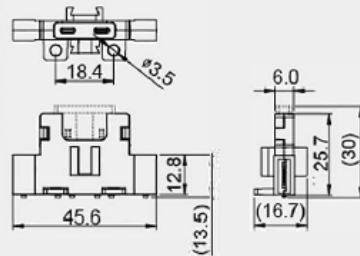


(6.4mm)0.250" Quick connect

32V DC

FUSE

ATO / ATC BLADE FUSE

CUT-OUT



FEATURES:

- Material:
Frame: nylon(UL flame: 94V-0).
Terminal: brass.
- Input terminal rating: 0.25" terminal (30A max).
- Output terminal rating: 0.25" terminal (30A max).
- Side stackable for multiple block configurations.
- unavailable in UK, Netherland, Belgium and Luxemburg markets.