

**SPECIFICATIONS:**

BUSHING:  $\phi$  22mm.  
 CONTACT RATING: 2A @ 48VDC or 125VAC.  
 ELECTRICAL LIFE: 10,000cycles at full load.  
 CONTACT RESISTANCE: 10m-ohms max. initial @2-4VDC.  
 INSULATION RESISTANCE: 1,000M-ohms min. @ 500VDC.  
 DIELECTRIC STRENGTH: 3,000VAC for 1 minute.  
 OPERATING TEMPERATURE: -20°C ~ +55°C.

**MATERIALS:**

BUSHING & BUTTON: See Bushing & Button Option.  
 CONTACT: Silver alloy.  
 BODY & BASE: Glass filled nylon 6/6 (UL 94V-0)  
 TERMINAL: Nickel plated brass.  
 NUT: Nickel plated brass.


Specifications and Dimensions subject to change

**SPST**



Model No.	Type	
02	OFF	MOM


Schematic

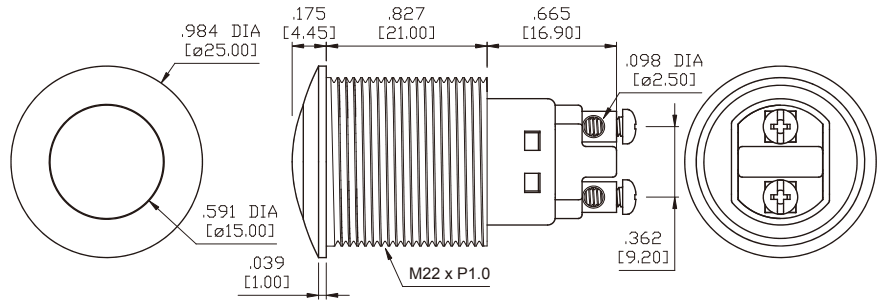


**SPST IP65 Front panel protection**

Model No.	Type	
02	OFF	MOM


Schematic

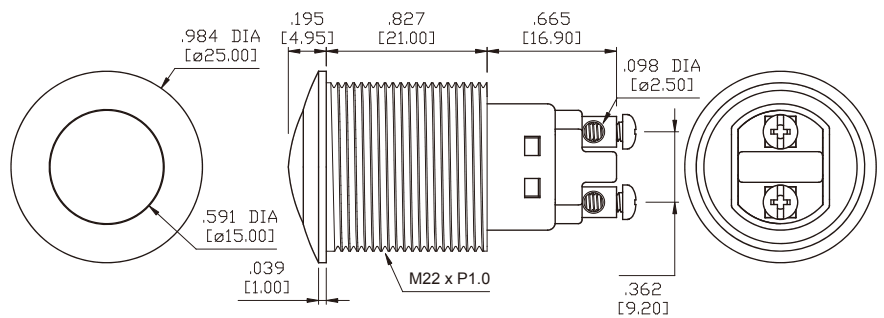

**NUT**

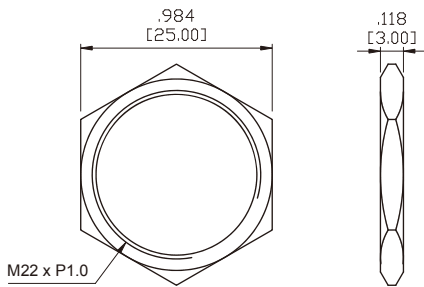

**O-RING**

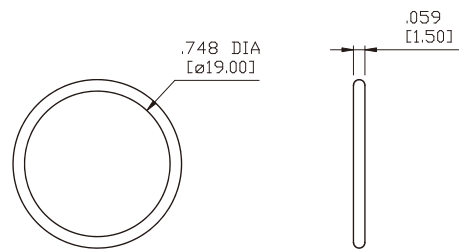

**HOW TO ORDER**

