


DP(L) SERIES


SPST Standard Piano Type



DIP SWITCH

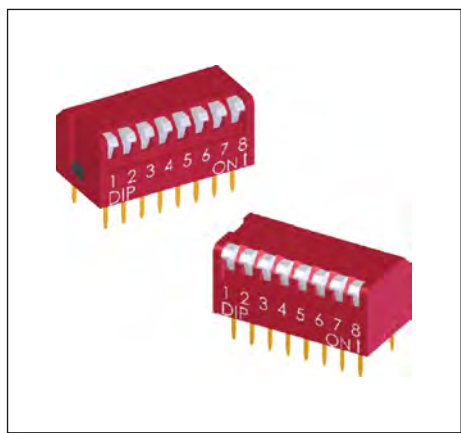

HOW TO ORDER

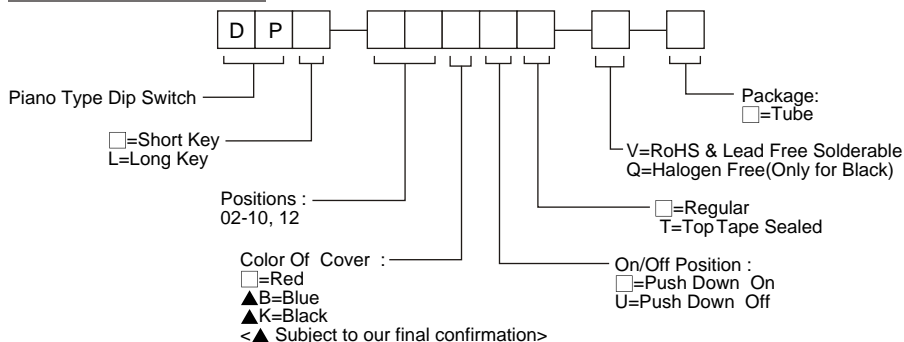

SPECIFICATION

MECHANICAL

Operation Force: 400gf max.
Stroke: 30°

ENVIRONMENTAL

Operation Temperature: -20°C to +70°C
Storage Temperature: -40°C to +85°C

ELECTRICAL

Electrical Life: 2,000 operations
Non-Switching Rating: 100mA , 50VDC
Switching Rating: 25mA , 24VDC

PACKAGE

DP(L)-02: 70 pcs/tube	DP(L)-02-T: 65 pcs/tube
DP(L)-03: 50 pcs/tube	DP(L)-03-T: 49 pcs/tube
DP(L)-04: 39 pcs/tube	DP(L)-04-T: 39 pcs/tube
DP(L)-05: 32 pcs/tube	DP(L)-05-T: 32 pcs/tube
DP(L)-06: 27 pcs/tube	DP(L)-06-T: 27 pcs/tube
DP(L)-07: 24 pcs/tube	DP(L)-07-T: 24 pcs/tube
DP(L)-08: 21 pcs/tube	DP(L)-08-T: 21 pcs/tube
DP(L)-09: 19 pcs/tube	DP(L)-09-T: 19 pcs/tube
DP(L)-10: 17 pcs/tube	DP(L)-10-T: 17 pcs/tube
DP(L)-12: 14 pcs/tube	DP(L)-12-T: 14 pcs/tube


CIRCUIT

SCHEMATIC(TYP.)



(2,3,4,5,6,7,8,9,10,12, POS AVAIL)

DP(L)

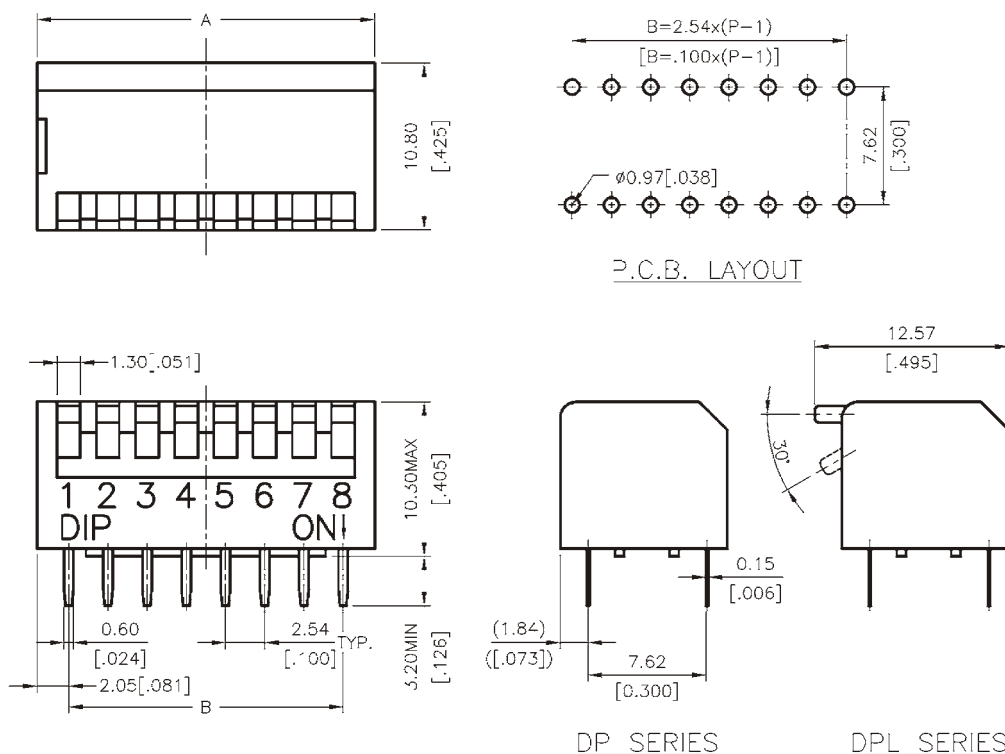

DP-12 DPL-12	12	32.04 [1.261]	27.94 [1.100]
DP-10 DPL-10	10	26.96 [1.061]	22.86 [.900]
DP-09 DPL-09	9	24.42 [.96]	20.32 [.800]
DP-08 DPL-08	8	21.88 [.86]	17.78 [.700]
DP-07 DPL-07	/	19.34 [.76]	15.24 [.600]
DP-06 DPL-06	6	16.80 [.66]	12.70 [.500]
DP-05 DPL-05	5	14.26 [.56]	10.16 [.400]
DP-04 DPL-04	4	11.72 [.46]	7.62 [.300]
DP-03 DPL-03	3	9.18 [.36]	5.08 [.200]
DP-02 DPL-02	2	6.64 [.26]	2.54 [.100]
PROD. NO.	NO. OF POS.	DIM. A	DIM. B