


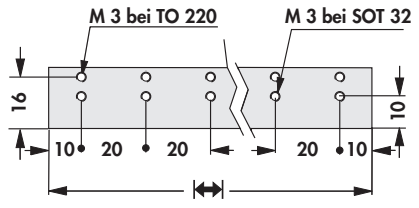



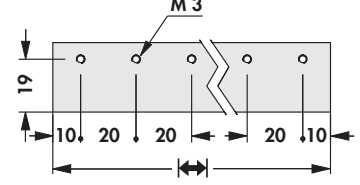


Extruded heatsinks for transistors

- compact PCB heatsink
- effective heat dissipation for single and double row transistor mounting
- profile **SK 454** → A 30
- profile **SK 452** → A 33
- specific versions upon customer's request

			
art. no.	↔ [mm]	R _{th} [K/W]	⊕
SK 454 20 1 x M3 ...	20	10.8	SOT 32/ TO 220
SK 454 60 3 x M3 ...	60	7.7	
SK 454 20 2 x M3 ...	20	10.8	
SK 454 40 4 x M3 ...	40	9.4	
SK 454 60 6 x M3 ...	60	7.7	
SK 454 40 2 x M3 TO 220	40	9.4	
SK 454 80 4 x M3 TO 220	80	6.5	
SK 454 100 5 x M3 TO 220	100	5.9	
SK 454 80 8 x M3 TO 220	80	6.5	
SK 454 100 10xM3 TO 220	100	5.9	
please indicate: ... ⊕ SOT 32; TO 220			
			
art. no.	↔ [mm]	R _{th} [K/W]	⊕
SK 452 20 1 x M3	20	11.1	TO 218/ TO 220/ TO 247/ TO 248/ TO 3 P
SK 452 40 2 x M3	40	7.5	
SK 452 60 3 x M3	60	5.9	
SK 452 80 4 x M3	80	4.9	
SK 452 100 5 x M3	100	4.3	
SK 452 20 2 x M3	20	11.1	
SK 452 40 4 x M3	40	7.5	
SK 452 60 6 x M3	60	5.9	
SK 452 80 8 x M3	80	4.9	
SK 452 100 10 x M3	100	4.3	
surface:	black anodised		